
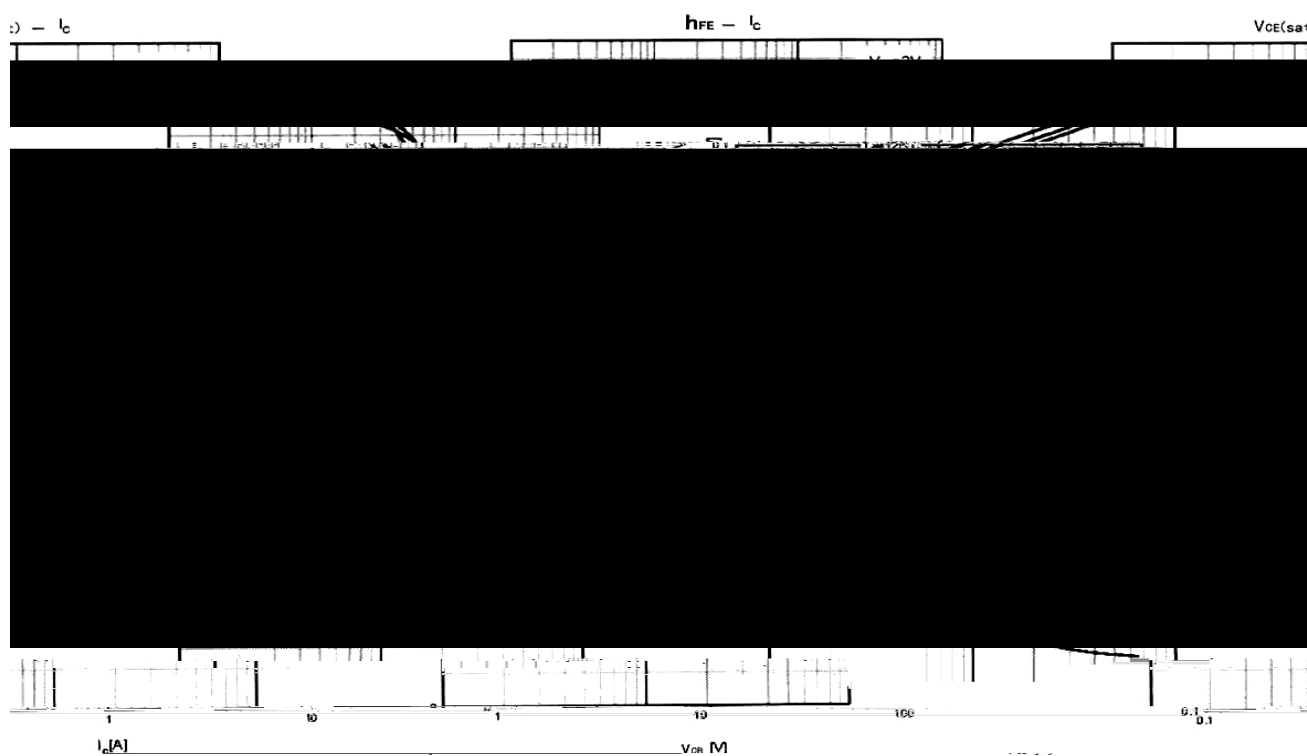


/ Absolute Maximum Ratings(Ta=25)

V_{DS}	I_D	T_J	θ_{JA}
		$R_{\theta JA}$	

/ Electrical Characteristics(Ta=25)


V_{DS}	I_D	f_{sw}	η	ε_{oss}	ω_{z}	θ_{JA}
		μ				
						μ
						μ

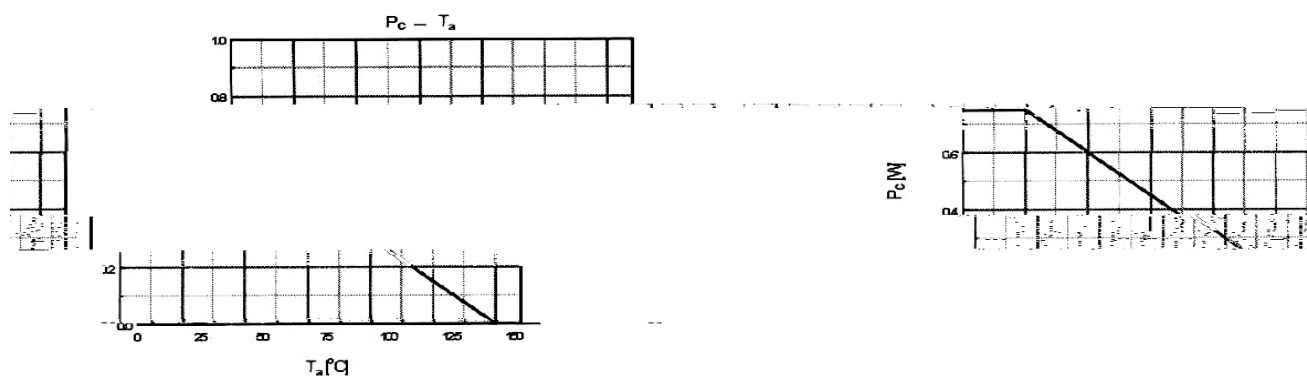


/ Package Dimensions

TO-92

Unit: mm

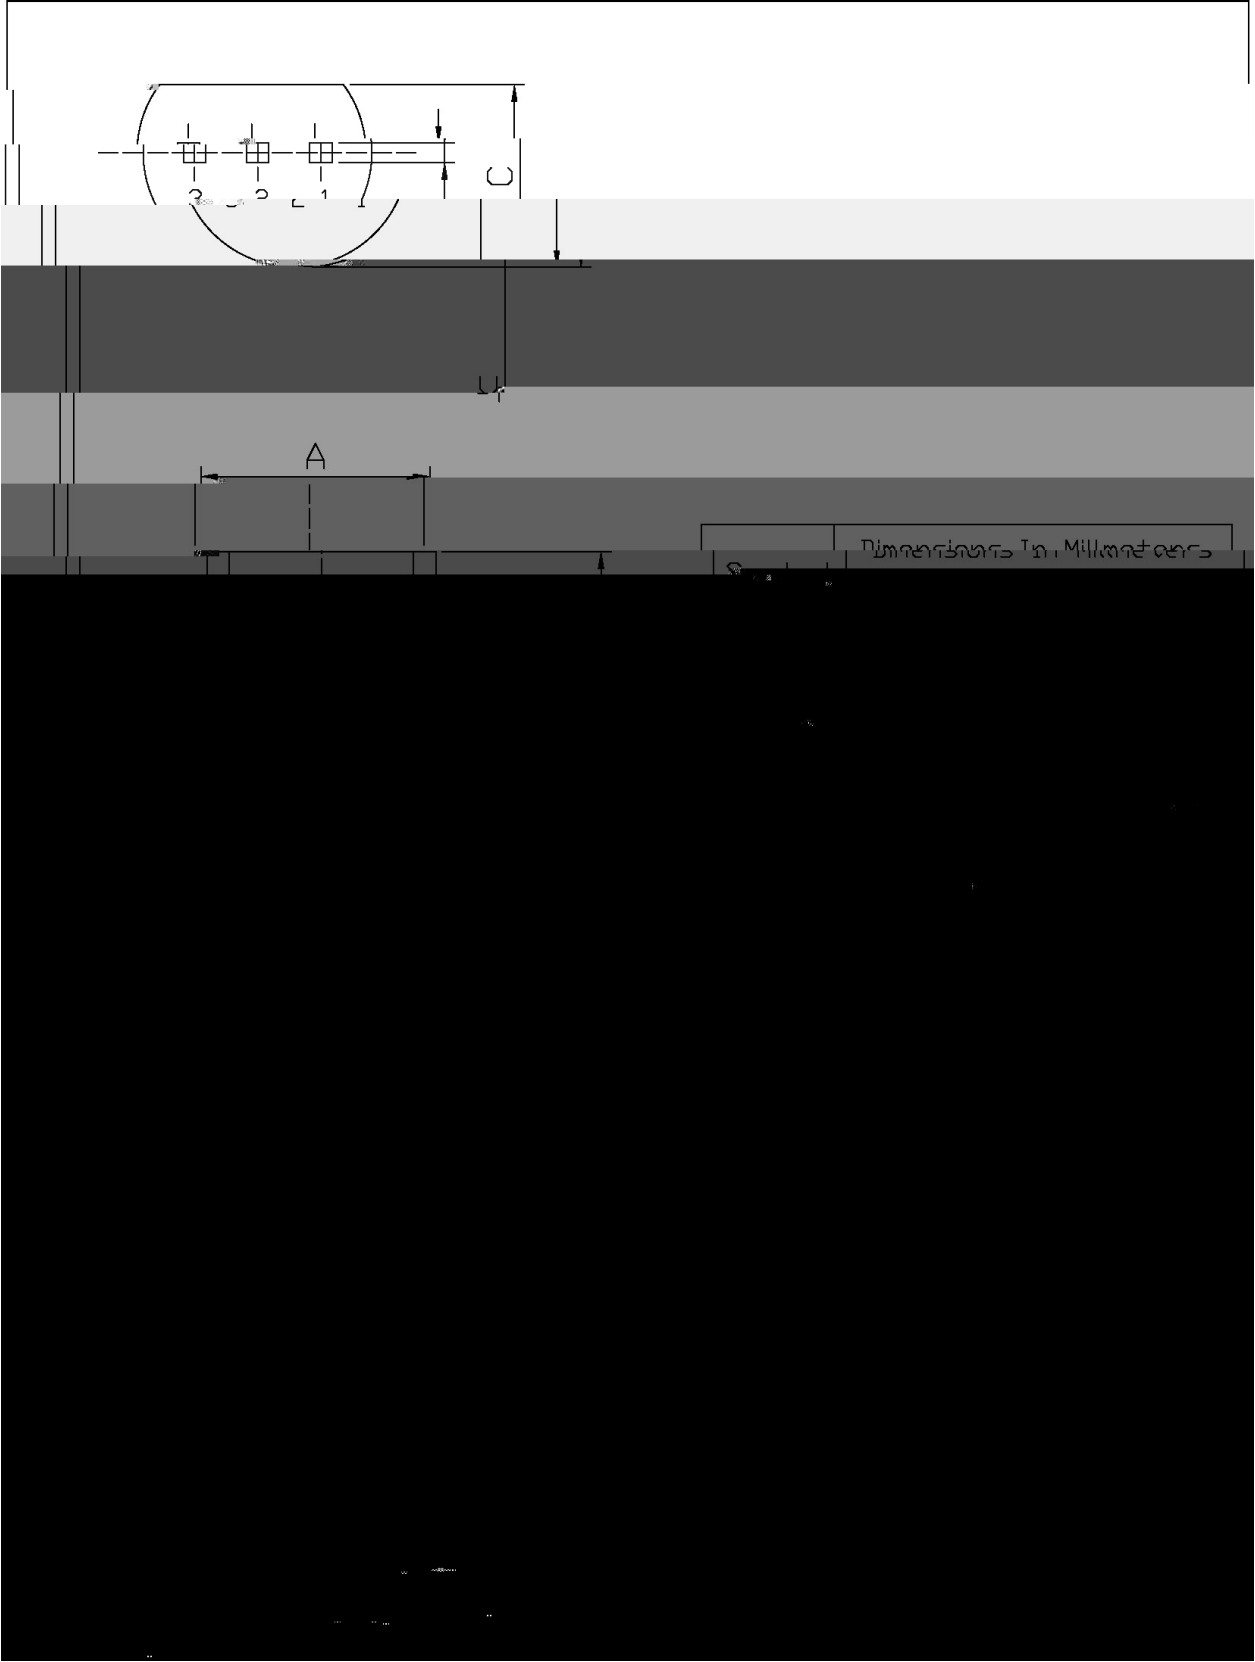


/ Marking Instructions

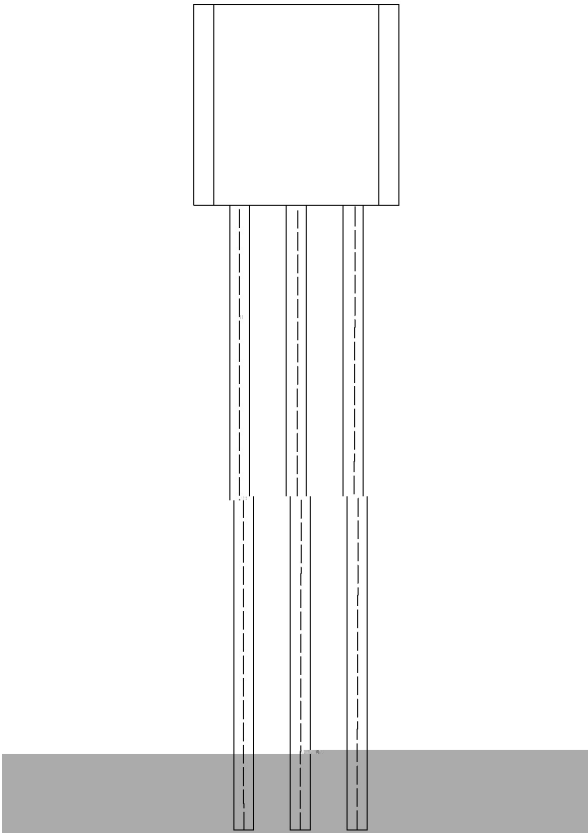

б " X
EU: № з " ПД
 № д ° " ζ A M

() / Temperature Profile for Dip Soldering(Pb-Free)

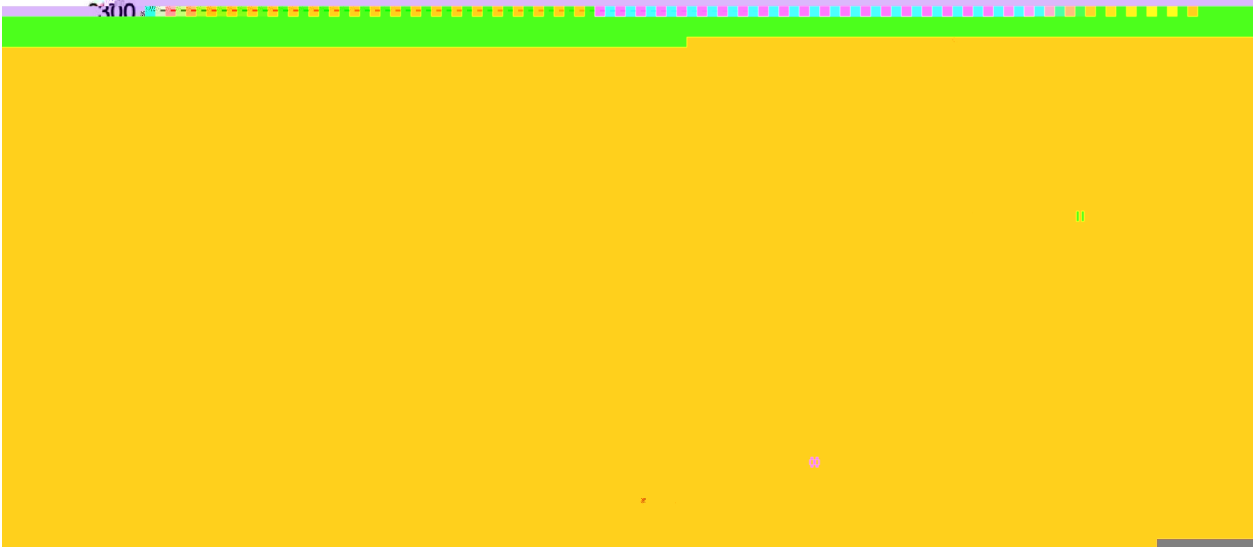

٢" ٧
 ٲ ٲ ٲ ٲ ٲ ٲ ٲ ٲ ٲ
 ٲ ٲ ٲ ٲ ٲ ٲ ٲ ٲ ٲ ٲ ٲ ٲ
 ٲ ٲ, ٲ ٲ ٲ ٲ ٲ ٲ ٲ

/ Resistance to Soldering Heat Test Conditions

ٲ ٲ ٲ ٲ ٲ ٲ ٲ ٲ

/ Packaging SPEC.

ٲ ٲ ٲ ٲ