


/ Descriptions

/ Features

100V~1000V 4.0A

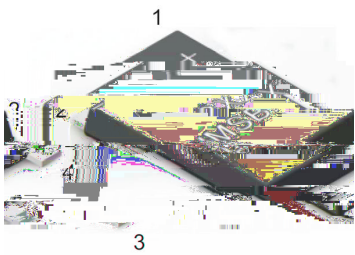

/ Marking

/ Electrical Characteristic Curve

Fig.1 Average Rectified Output Current Derating Curve



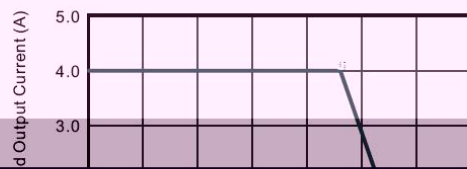


Fig.2 Typical Reverse Characteristics

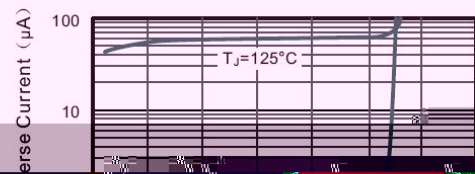

/ Package Dimensions

UMSB

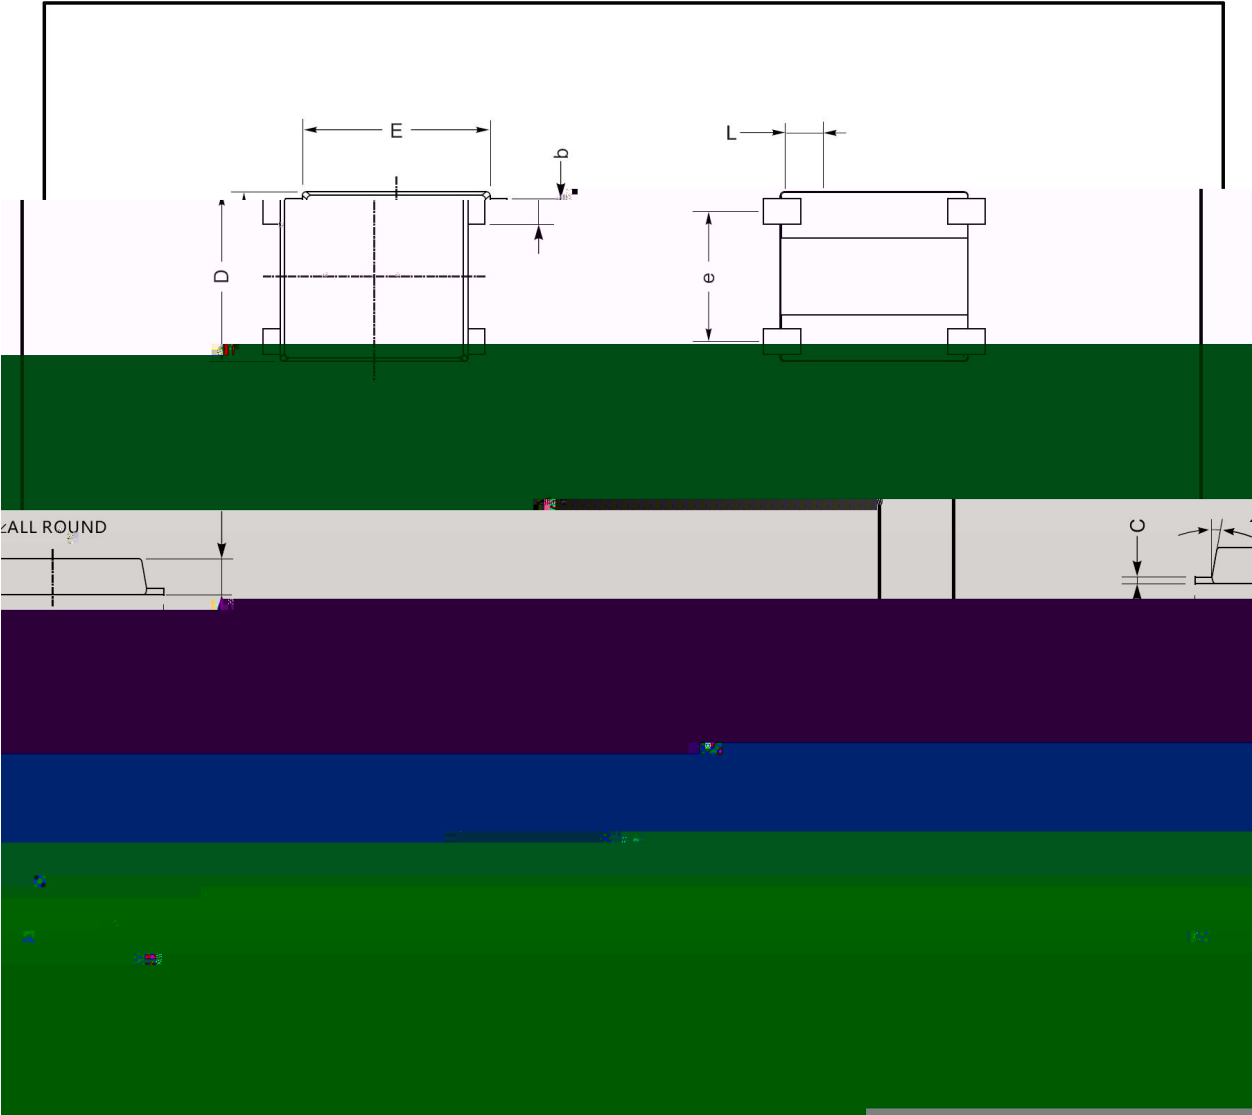

/ Marking Instructions



**** 1 * 3 *

**** * Å M

() /