



/ Revised record

A	2021-4-2	all	W01		

/ Descriptions

50~1000V 15A GBJ

/ Features

```

8B ;                                GH                                IJ>&(                                "
H: 76"/3%"$%9D+ : "2%2C9+"13: %: =B70 "4 7+ %976"4 36: : "$670+92=K* "$670+92"4 7+ %976"*70"G-H"/674 4 71969+L"
267009/927+93D" I J>&(="M763< D"/% "$%3: C2+!"
"


```

/ Applications

一般用途! "

/ Equivalent Circuit

/ Pinning



") " " " " " " " " N " " J "

80P) QB R " " " " 80P ' # B " " 80P " N # B " " " " 80P " J QB &

/ h_{FE} Classifications & Marking

S "T 7%F9D<"0D0+%C2+93D0

/ **Absolute Maximum Ratings**(Ta=25)


P_K\,""

'! Q 92 "43CD+ : "3D")?(4 4b)?(4 4b)!U4 4"BC"867+ "M 7+09DF!"

1


11

GBJ Package Outline Dimensions

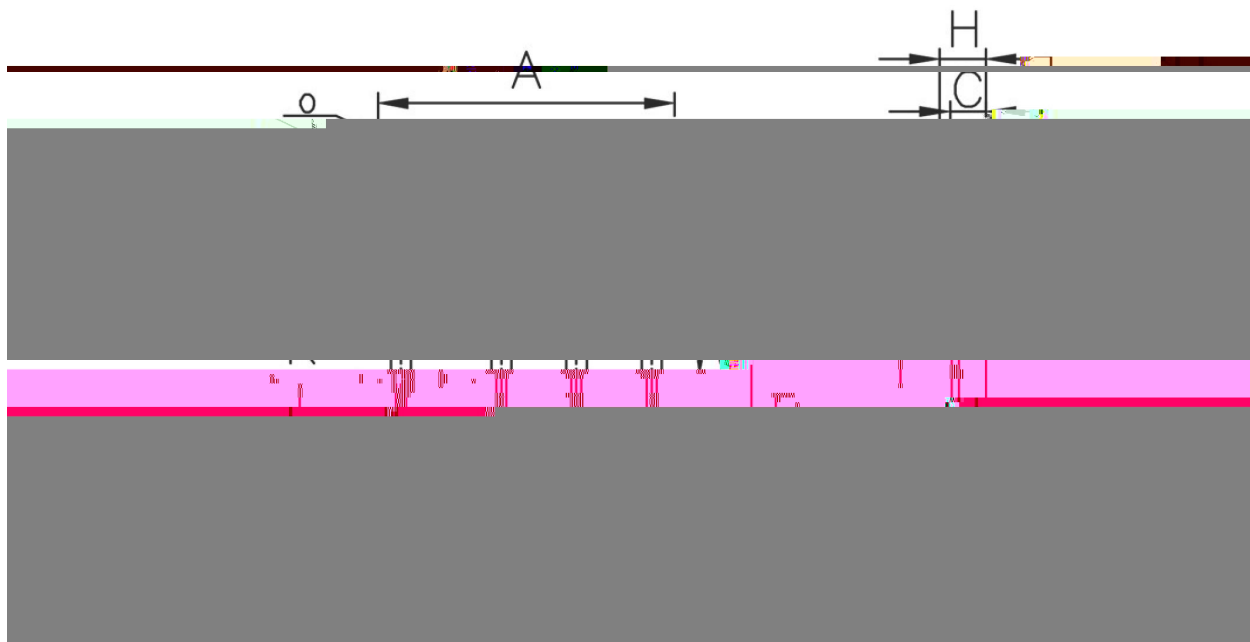

GBJ mechanical data



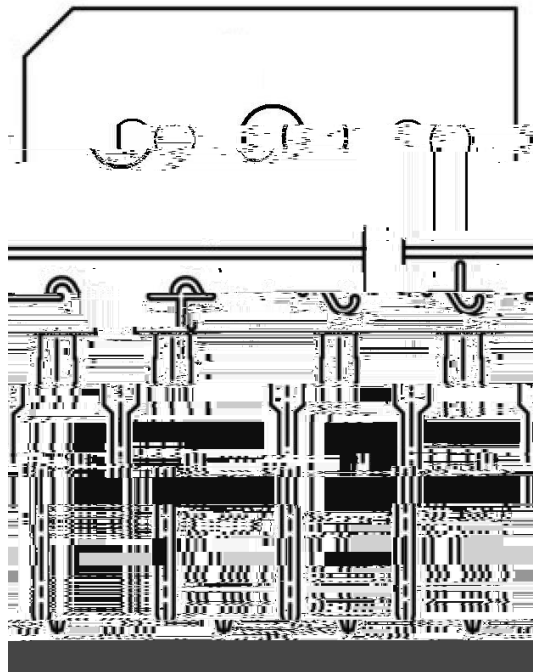


GBJ15005

Note:

5 ;E)?((?," " 8%3:C2+"KL\$!" bbbb,,

() / Temperature Profile for Dip Soldering(Pb-Free)

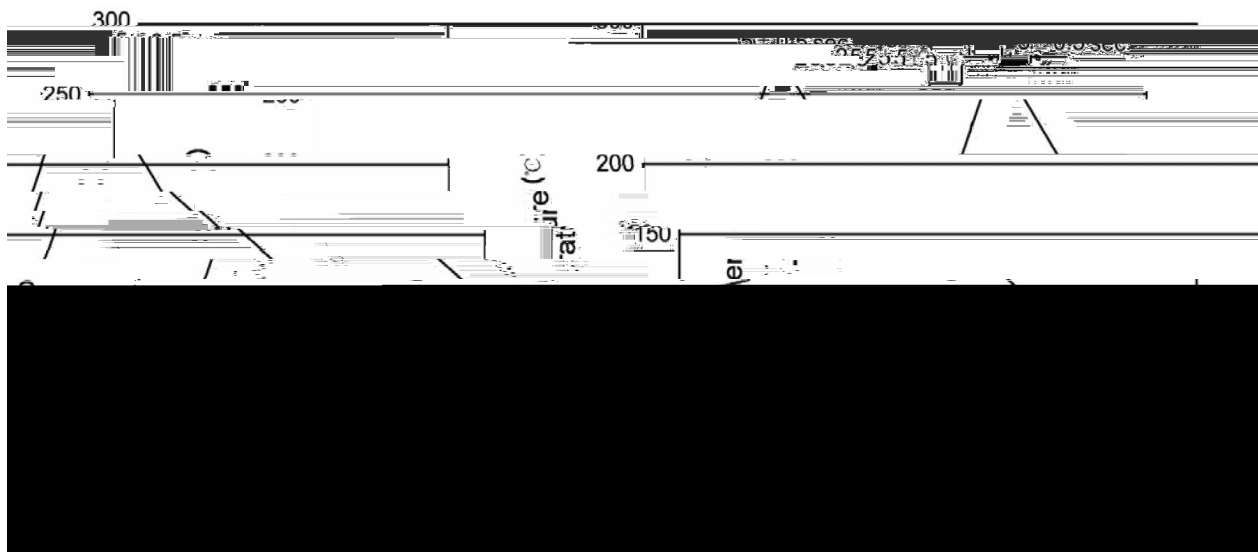/ Resistance to Soldering Heat Test Conditions

_____ / Packaging SPEC.

872F7< "KL\$ "	GD#0 "	Q:4 D0:3D" "	" " YCD# 4 4 N 2"
----------------	--------	--------------	-------------------