


TO-92LM NPN Silicon NPN transistor in a TO-92LM Plastic Package.


KSA928A
 complementary pair with KSA928A.

Audio frequency amplifier applications.




PIN1 Base PIN 2 Collector PIN 3 Emitter


h_{FE} Classifications Symbol	O	Y
h_{FE} Range		

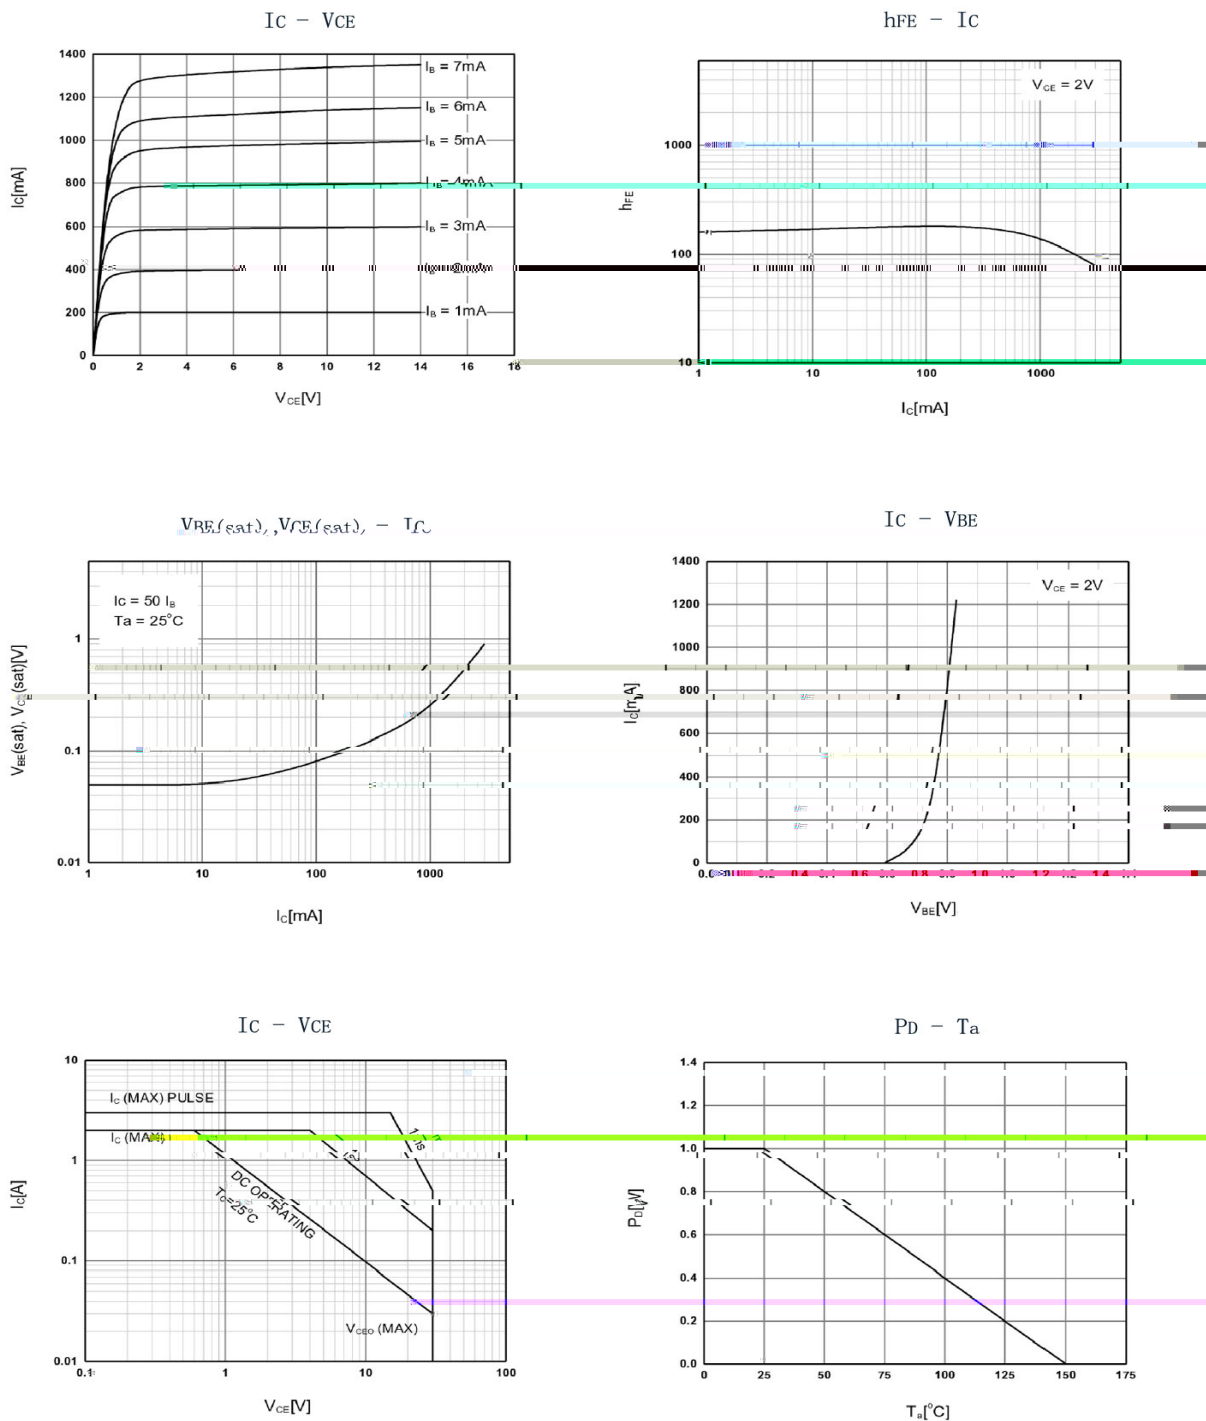

TO-92LM

Unit: mm

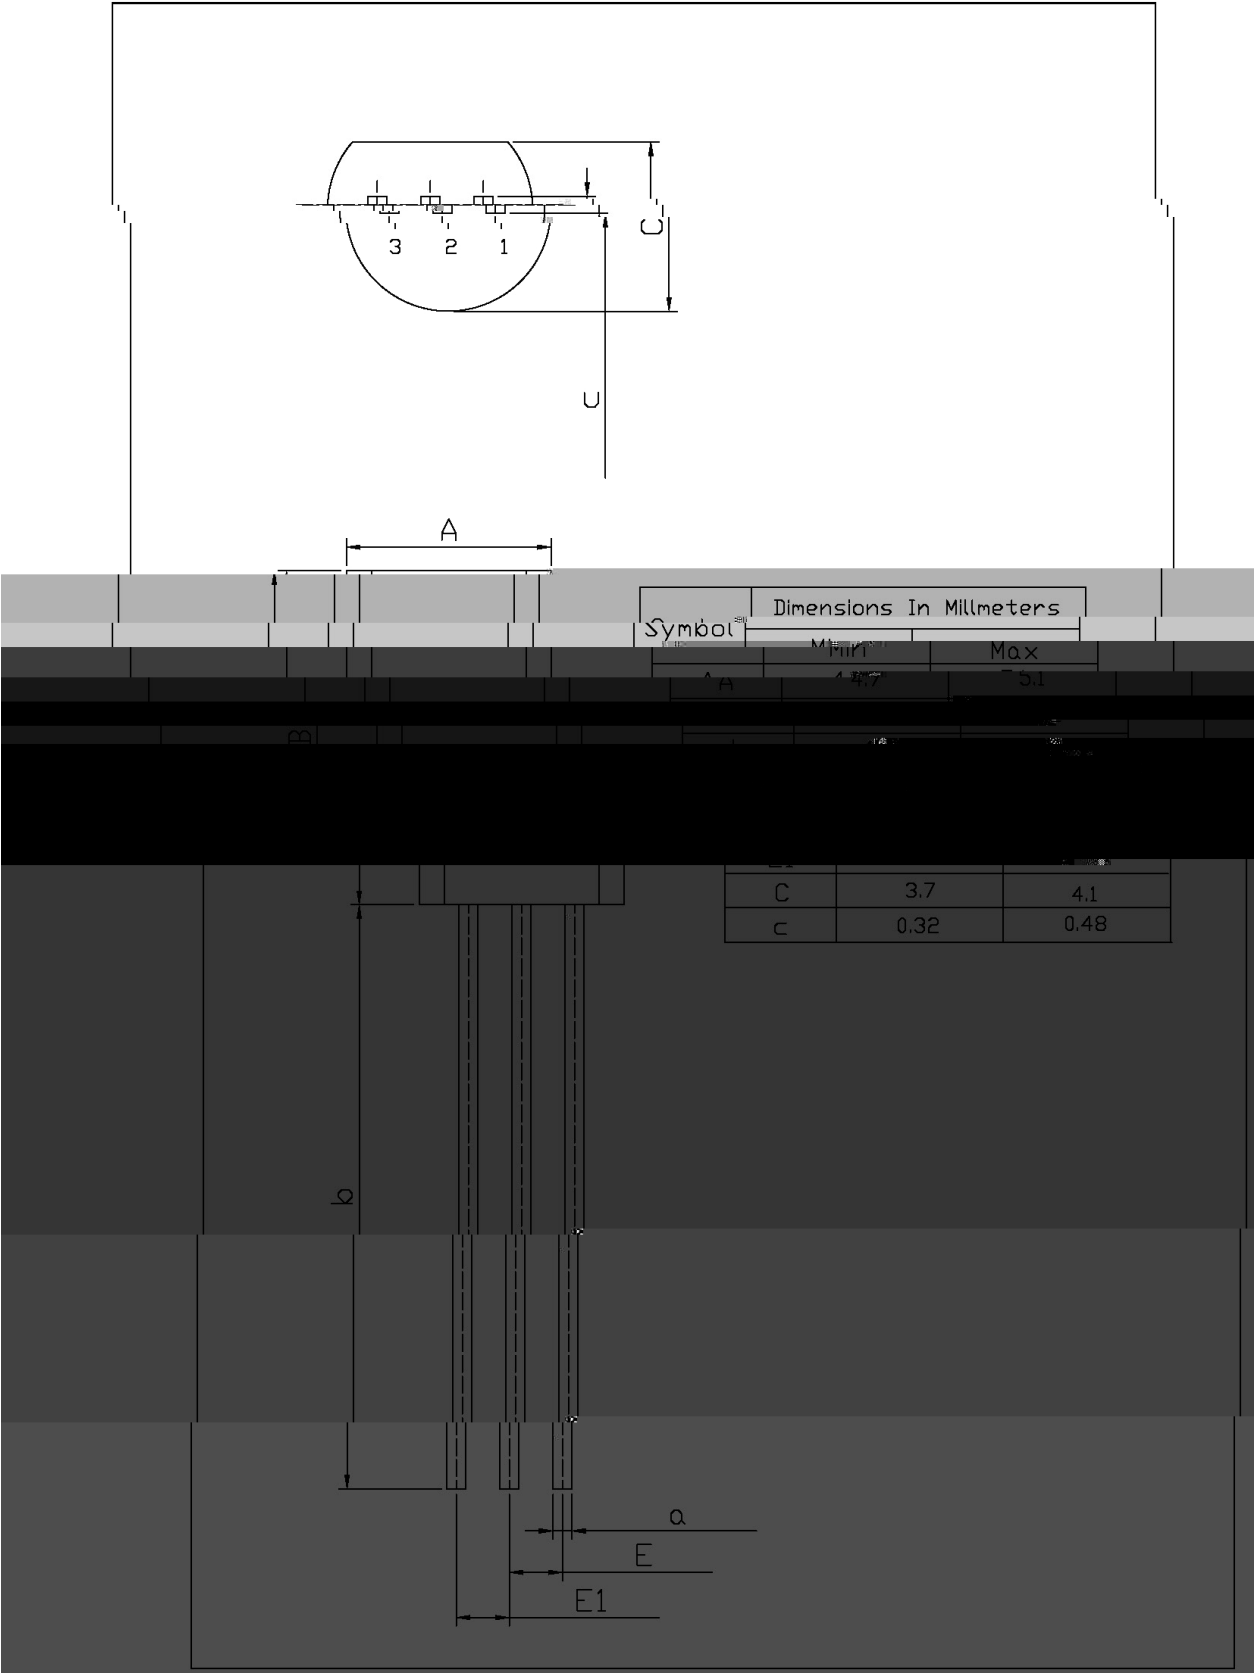

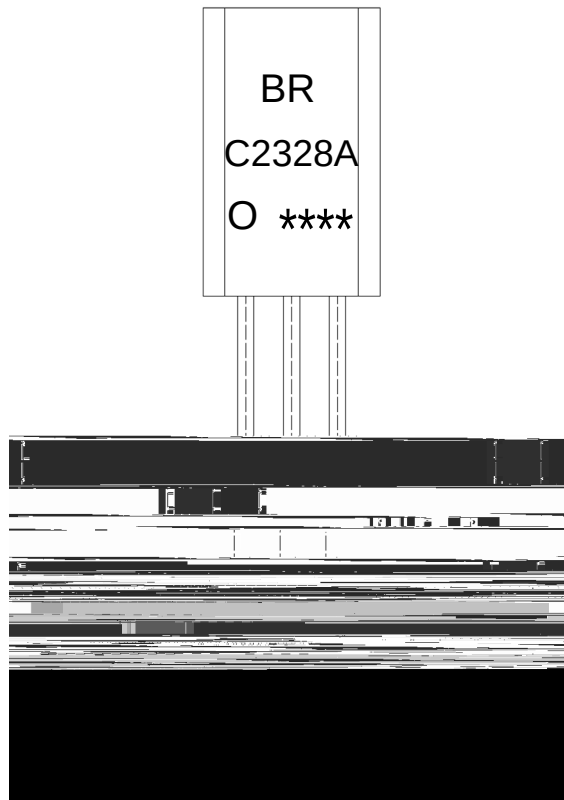

BR:

C2328A

O: h_{FE}


Note:

BR: Company Code.

C2328A: Product Type.

O: h_{FE} Classifications Symbol

****: Lot No. Code,code change with Lot No.

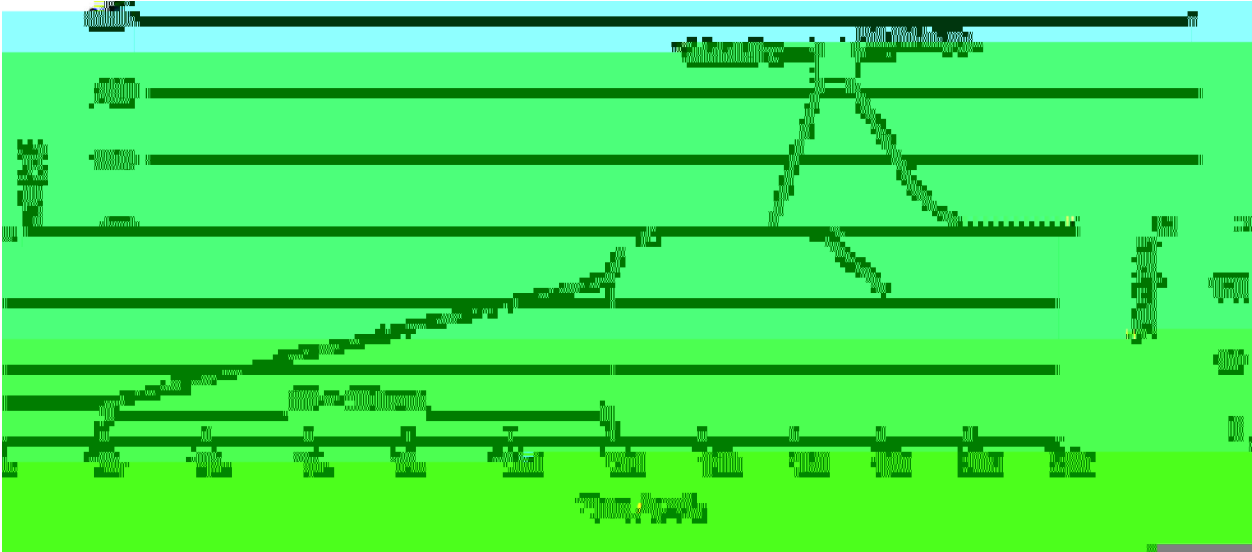

Note:

- 1

25 150

60 90sec;
- 2

255±5

5±0.5sec;
- 3

2 10

/sec.
- 1.Preheating:25~150

,

Time:60~90sec.
- 2.Peak Temp.:255±5

,

Duration:5±0.5sec.
3. Cooling Speed: 2~10

,

/sec.

270±5

10±1 sec.

Temp.:270±5

Time:10±1 sec

/ BULK

Package Type	Units					Dimension (unit mm3)		
	Units/Bag /	Bags/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Bag	Inner Box	Outer Box
TO-92LM	1,000	8	8,000	5	40,000	135×190	237×172×102	560×245×195

/ AMMO

Package Type	Units					Dimension (unit mm3)	
	Units/tape /	Tape/Inner Box /	Rows/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Inner Box	Outer Box
TO-92LM	2,500	1	100	10	25,000	328×230×42	480×346×235 547×407×268