SOT-89 PNP



Parameter	Symbol	Rating	Unit
Collector to Base Voltage			

≠ ∃ ЎА´E ∨ ƒ / Electrical Characteristic Curve

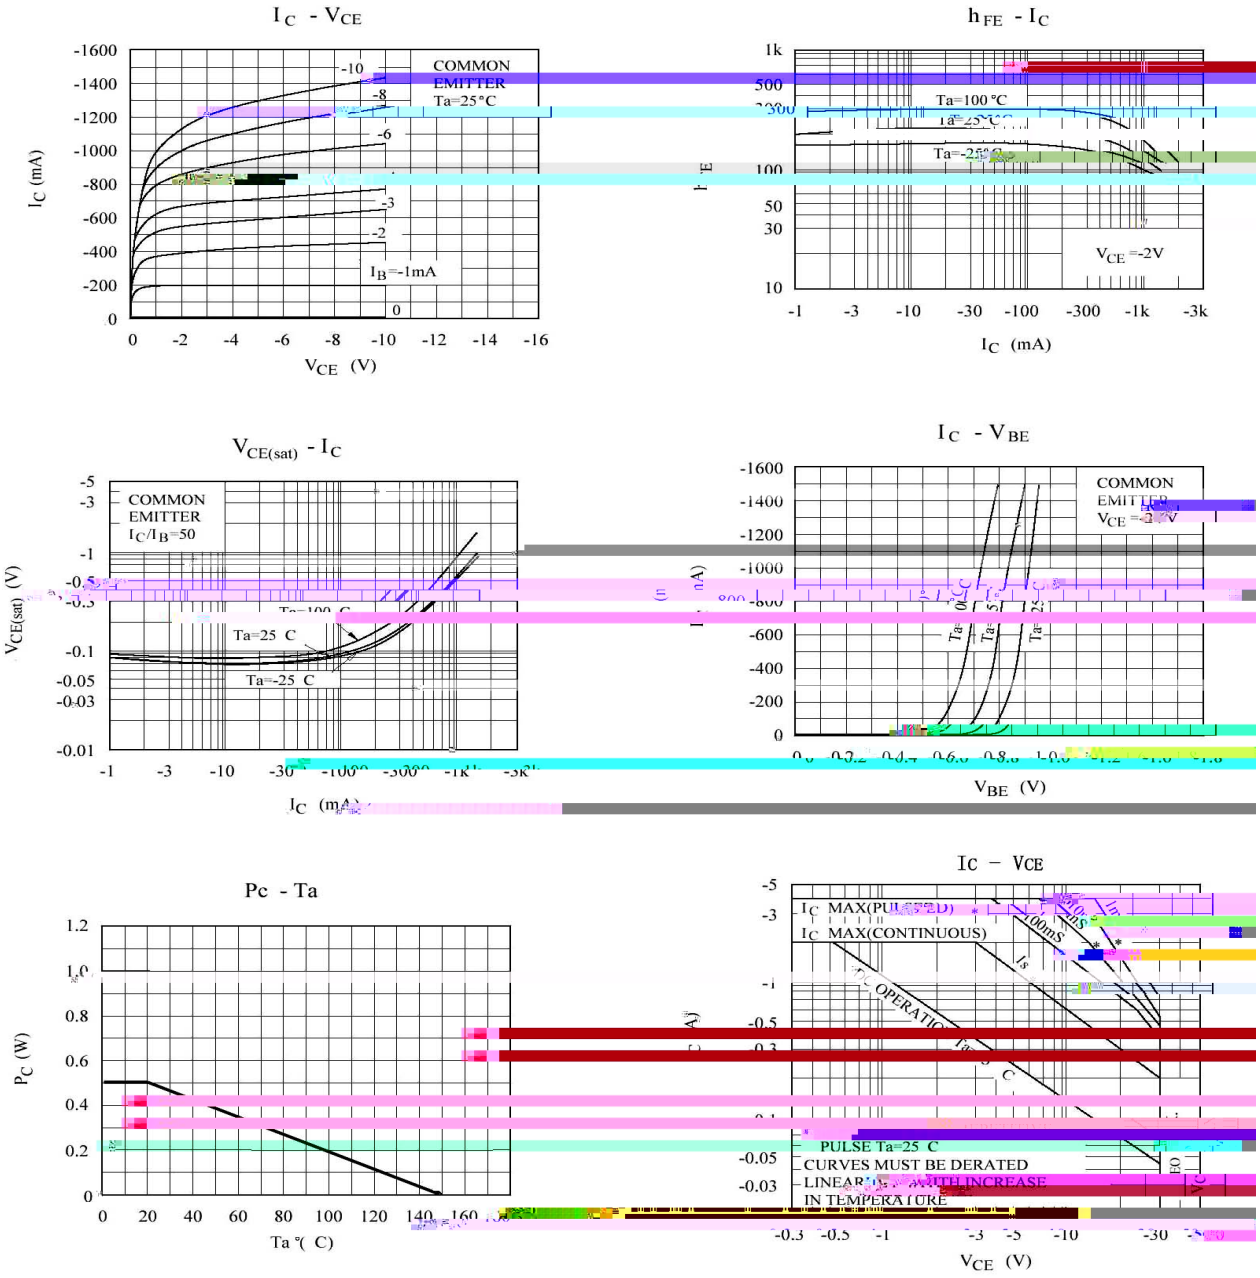

KTA1273T

Ł. Ł Ω / Marking Instructions

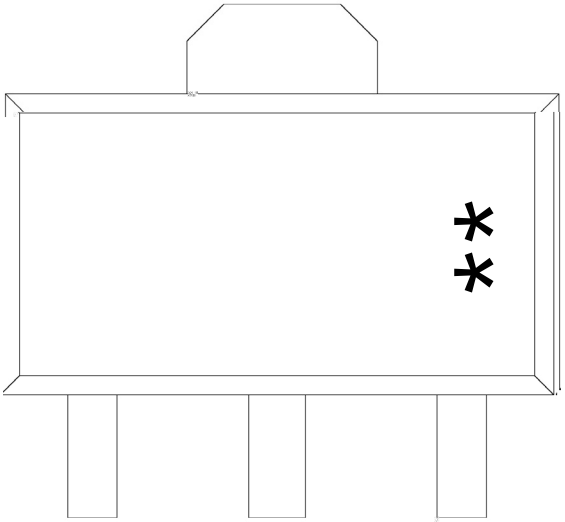

H

P3

O h_{FE}

**

Note:

H: Company Code.

P3: Product Type.

O h_{FE} Classifications Symbol

**: Lot No. Code, code change with Lot No.

ⅿ∫ ╕ẘ´Eⅵ ƒ(ᾠ₷) / Wh p shudwxuh Suriloh iru LU Uhior z Vroghulqj+Se0luhh,

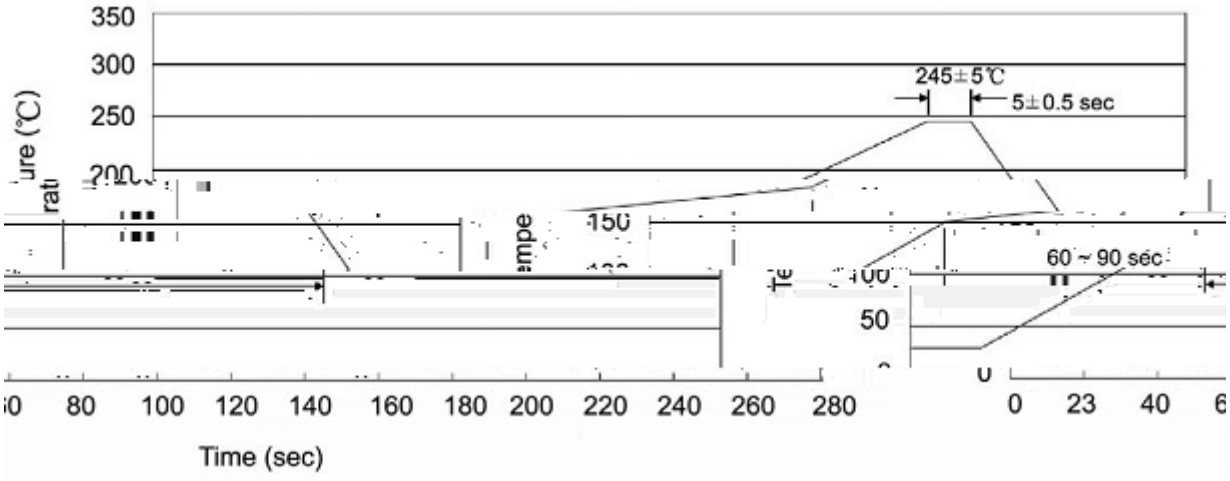

Note:

1	25	150	60	90sec;	1.Preheating:25~150 , Time:60~90sec.
2	245±5			5±0.5sec;	2.Peak Temp.:245±5 , Duration:5±0.5sec.
3		2	10	/sec.	3. Cooling Speed: 2~10 /sec.

ⅎ ü ɋ⁼`Y Ţ / Resistance to Soldering Heat Test Conditions

260±5	10±1 sec.	Temp.:260±5	Time:10±1 sec

ɒ Ŀ ≤— / Packaging SPEC.

/ REEL

Package Type 封	Units 包 量					Dimension 包 尺寸 (unit: mm^3)		
	卷盘	卷盘 盒	盒	盒			盒	

ä ѵ ŗ℃ / Notices