

KTA1277

TO-92LM

PNP


,

/ Absolute Maximum Ratings(Ta=25)

/ Electrical Characteristics(Ta=25)

		μ				
		μ				
						μ
						μ
		Ω				μ


/ Electrical Characteristic Curve

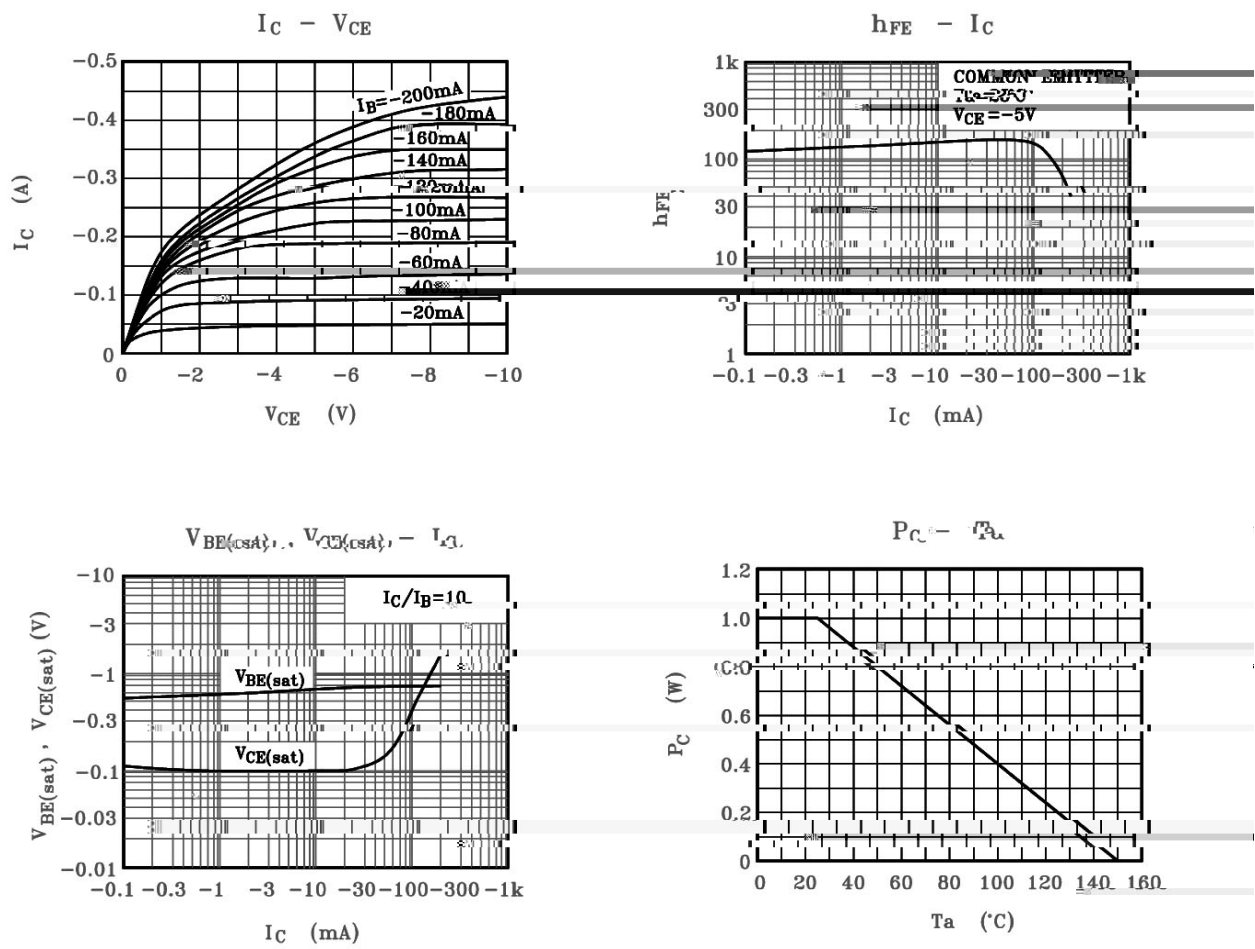

/ Package Dimensions


TO-92LM

Unit: mm

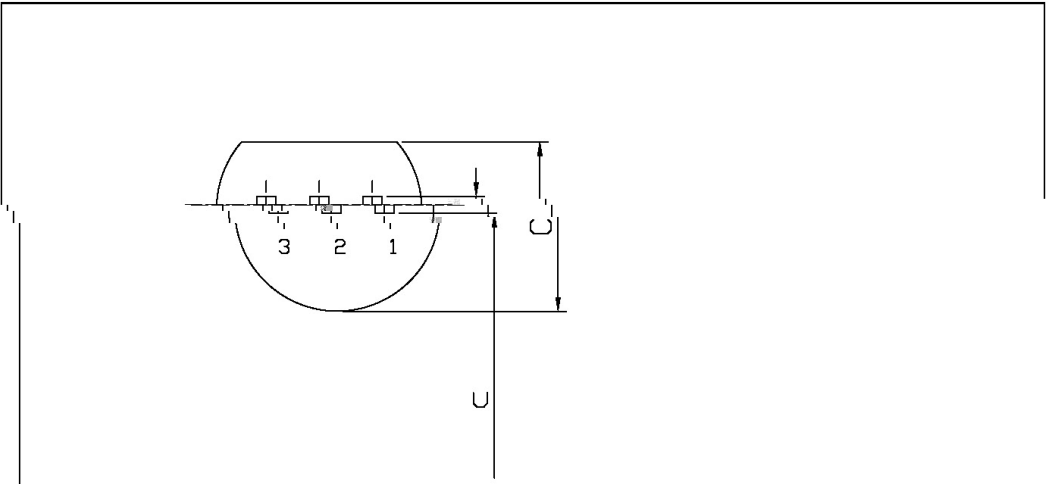

Symbol	Dimensions In Millimeters	
	Min	Max
A	4.7	5.1
B	1.2	1.5
C	0.8	1.0
D	0.5	0.7
E	0.4	0.5
F	0.3	0.4
G	0.2	0.3
H	0.1	0.2
I	0.1	0.2
J	0.1	0.2
K	0.1	0.2
L	0.1	0.2
M	0.1	0.2
N	0.1	0.2
O	0.1	0.2
P	0.1	0.2
Q	0.1	0.2
R	0.1	0.2
S	0.1	0.2
T	0.1	0.2
U	0.1	0.2
V	0.1	0.2
W	0.1	0.2
X	0.1	0.2
Y	0.1	0.2
Z	0.1	0.2

/ Marking Instructions

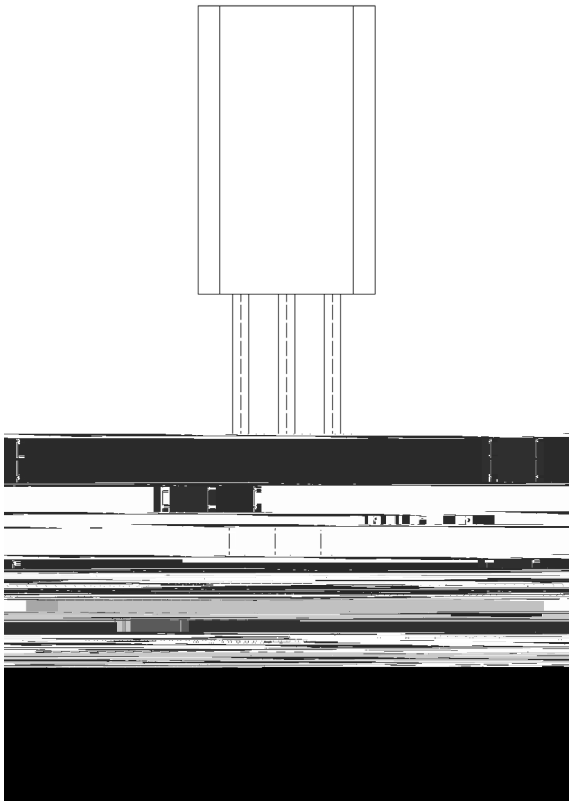

BR:
A1277
O: h_{FE}

() / Temperature Profile for Dip Soldering(Pb-Free)

 $\pm$ $\pm$ $\pm$ $\pm$

/ Resistance to Soldering Heat Test Conditions

 $\pm$
$$\pm$$
 $\pm$ $\pm$

/ Packaging SPEC.

/ Notices