

/ Descriptions

VRW0656 ММ Ё QSQ Æ М ы s ll 1


/ Features

Љ NWD5348 Й ´


/ Applications

Љ ã ã " ı ı ı º ð ı "Ω

/ Equivalent Circuit



/ Pinning




X X X


/ Marking


KTC4076

/ Electrical Characteristic Curve

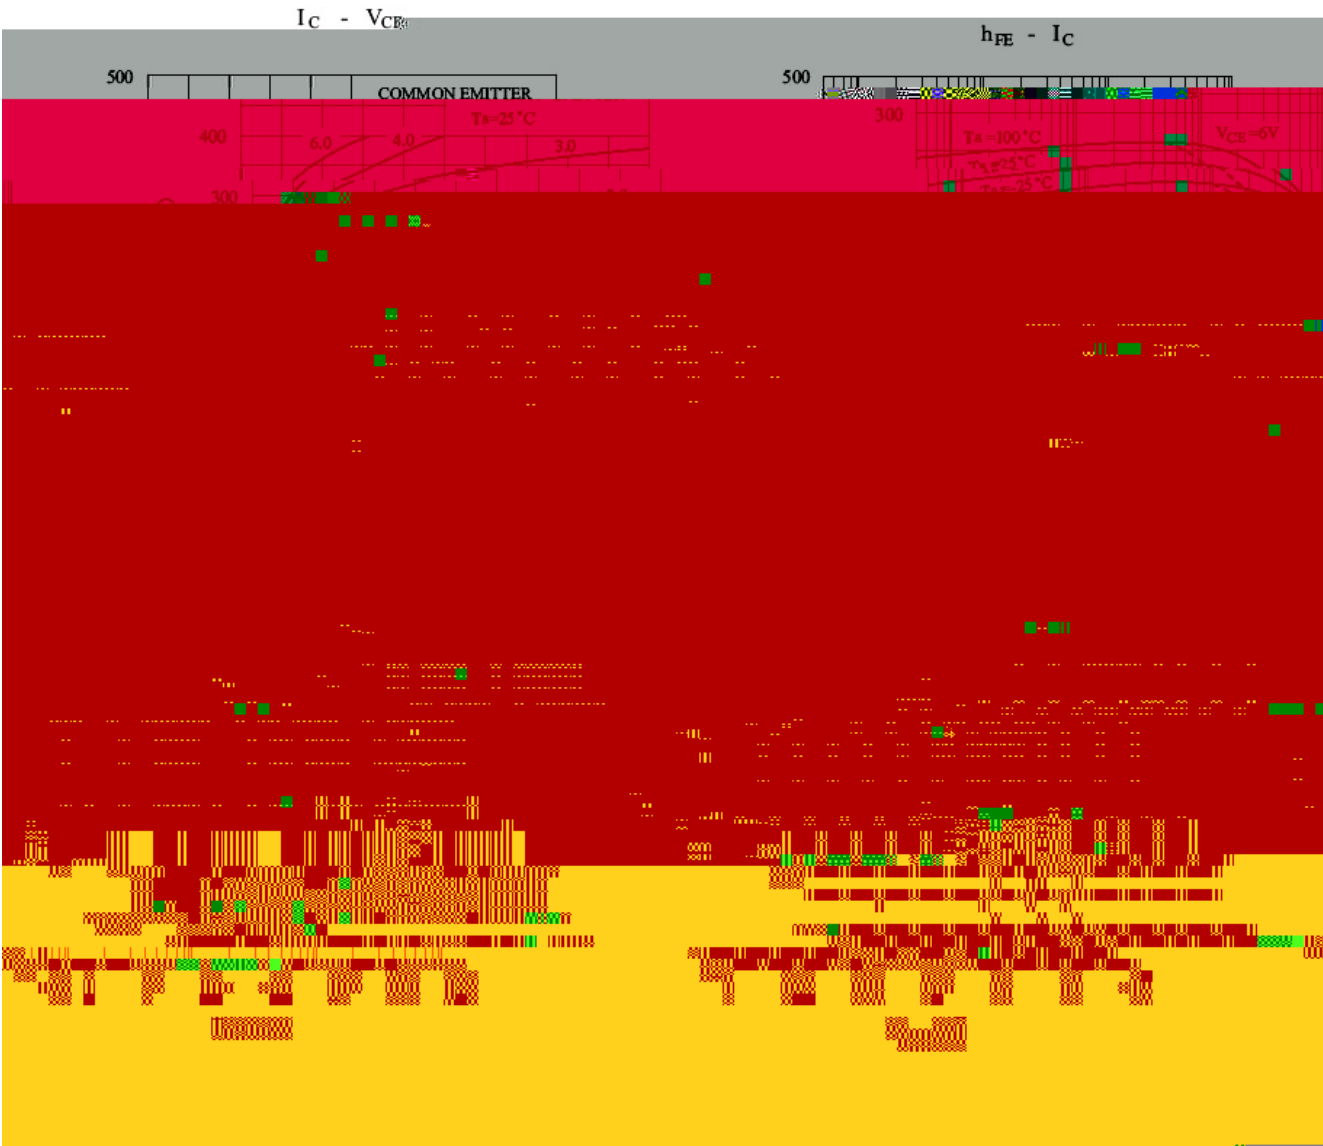

/ Package Dimensions

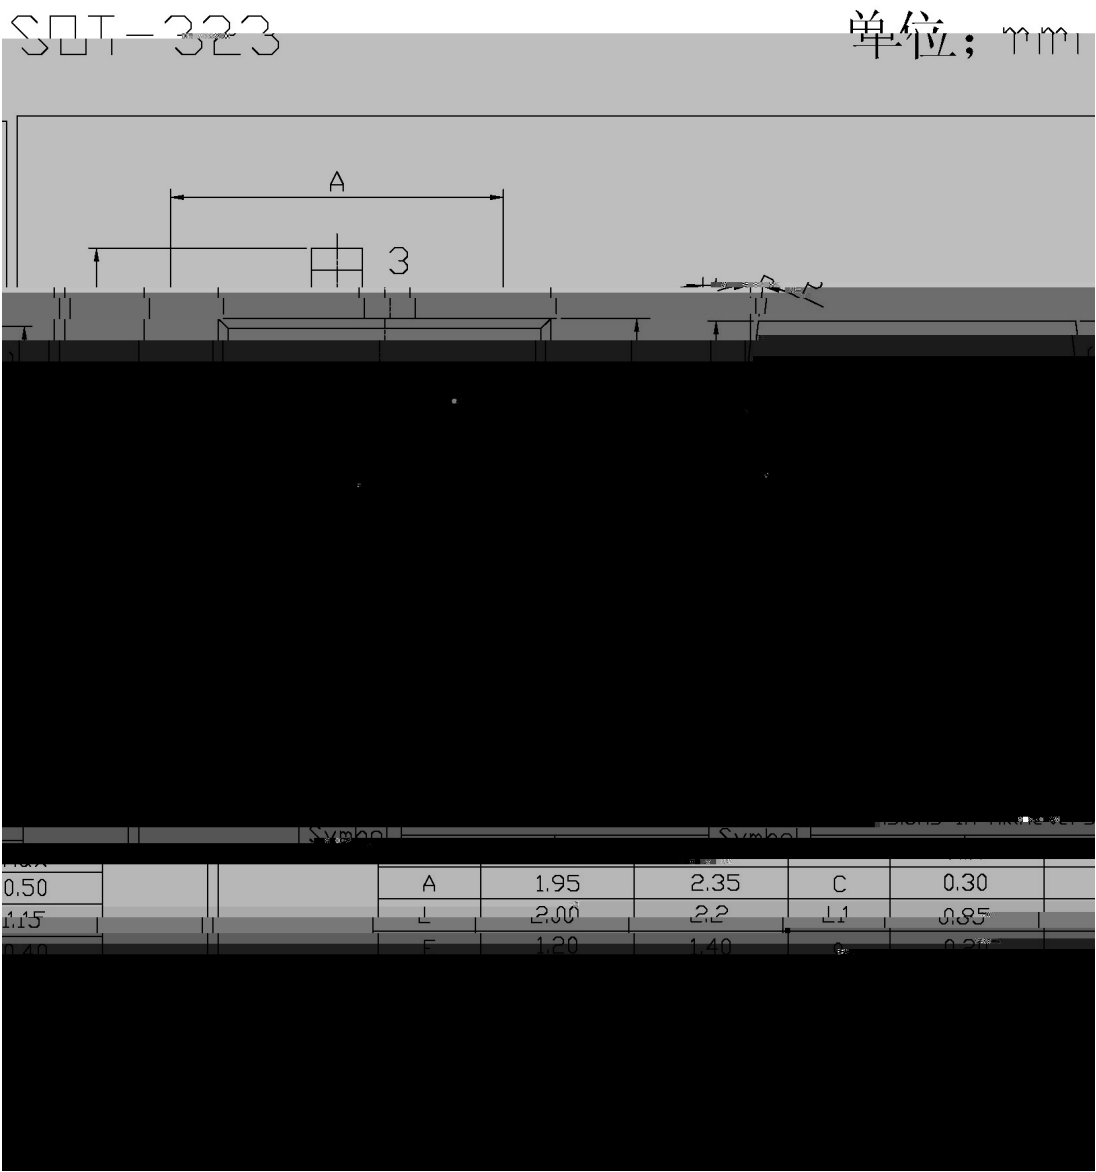

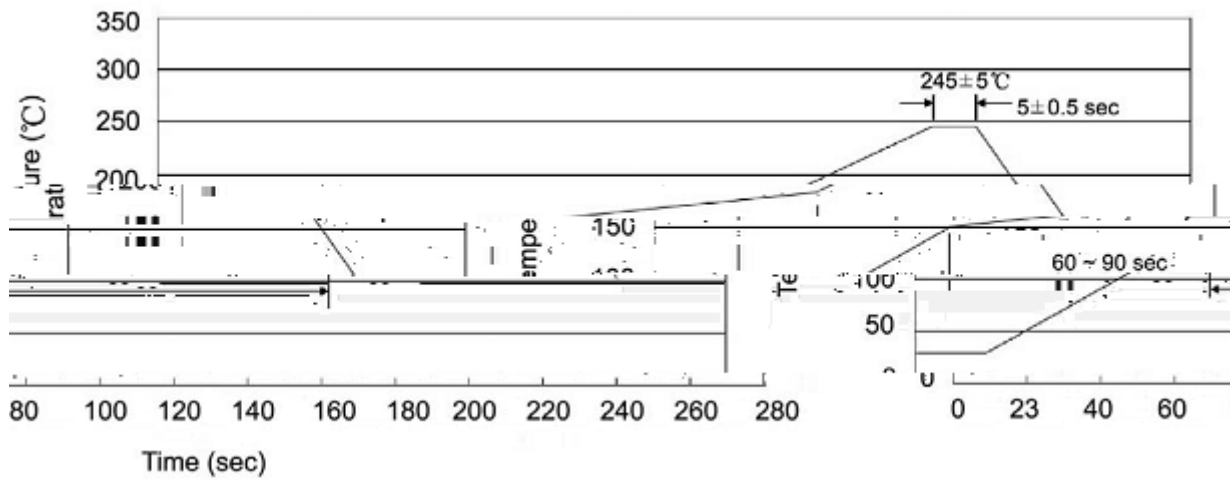

ب " X

İ ♪ □ Ÿ K † | ı ʻH ʃ K

Š Ě □ Ÿ ° † † H J ' Y A K °

இந்தியா, சமீபத்தில்

†

○ †

○

†

/ Resistance to Soldering Heat Test Conditions

$$\square \overset{\circ}{y} \chi \quad \circ \quad \dagger \quad \text{'H} \overset{\circ}{j} \chi \quad \circ$$

/ Packaging SPEC.

o' y t

封装形式	包装数量					包装尺寸		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SOT-323	3,000	10	30,000	6	180,000	7 ×8	180×120×180	390×385×205

/ Notices