

/ Descriptions

TO-220F NPN Silicon NPN transistor in a TO-220F Plastic Package.

/ Features


KTB1366

Low saturation voltage, complementary to KTB1366.


/ Applications

General Purpose Application.

/ Equivalent Circuit



/ Pinning



PIN1 Base PIN 2 Collector PIN 3 Emitter


/ h_{FE} Classifications & Marking

h_{FE} Classifications Symbol	O	Y
h_{FE} Range	60~120	100~200


Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	60	V
Collector to Emitter Voltage	V_{CEO}	60	V
Emitter to Base Voltage	V_{EBO}	7.0	V
Collector Current - Continuous	I_C	3.0	A
Base Current	I_B	0.5	A
Collector Power Dissipation	P		

jB
B


/ Electrical Characteristic Curve

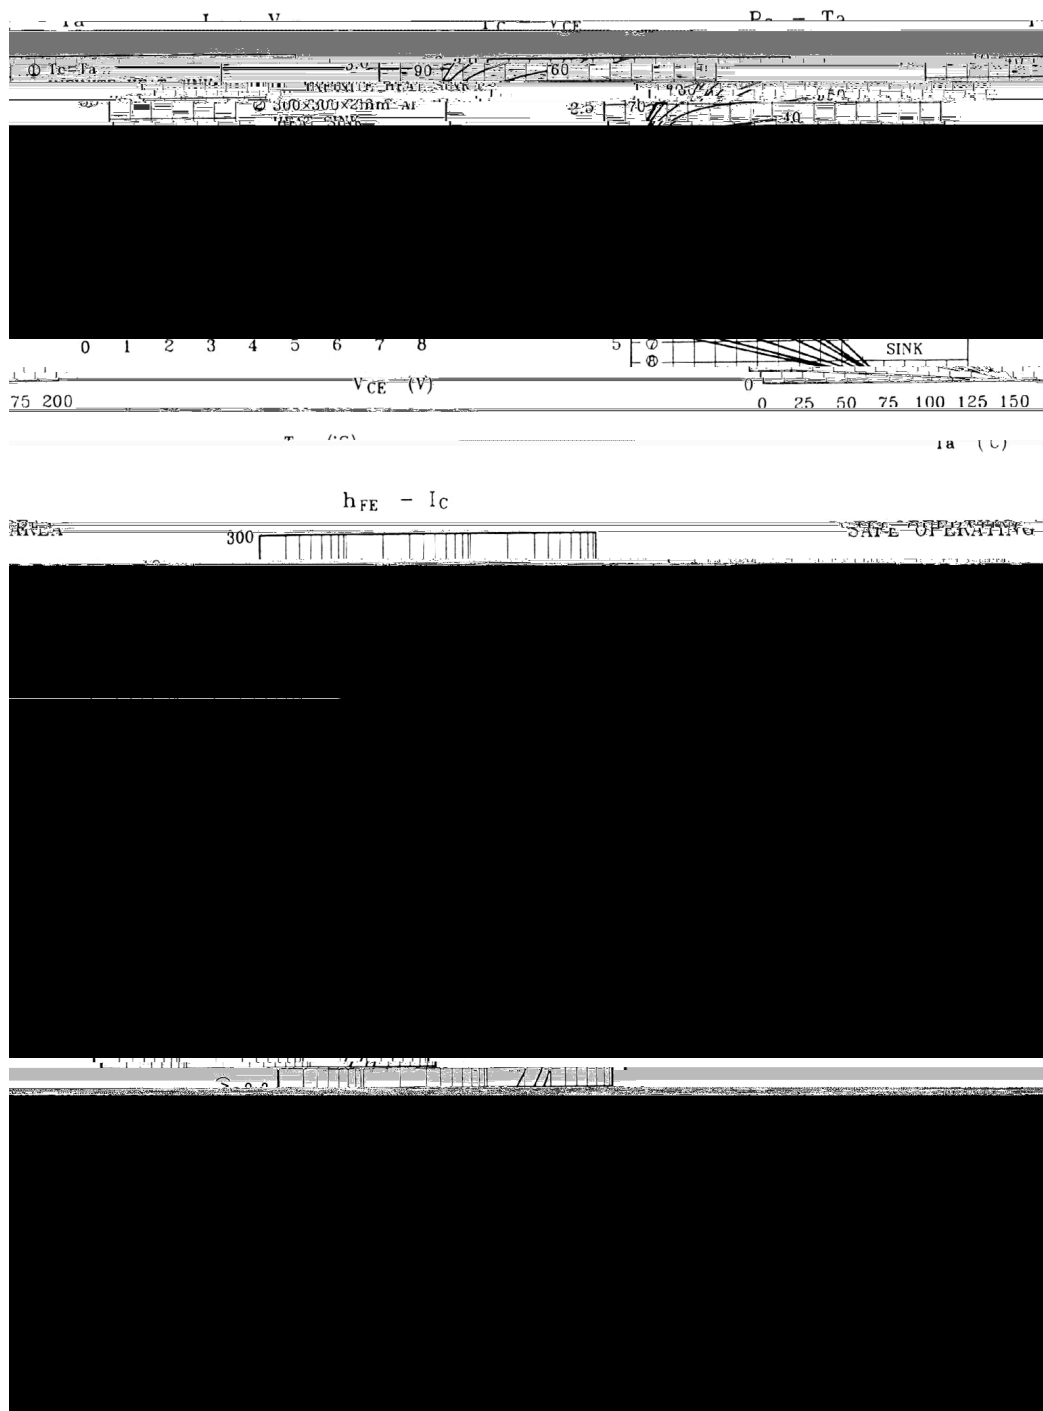

/ Package Dimensions

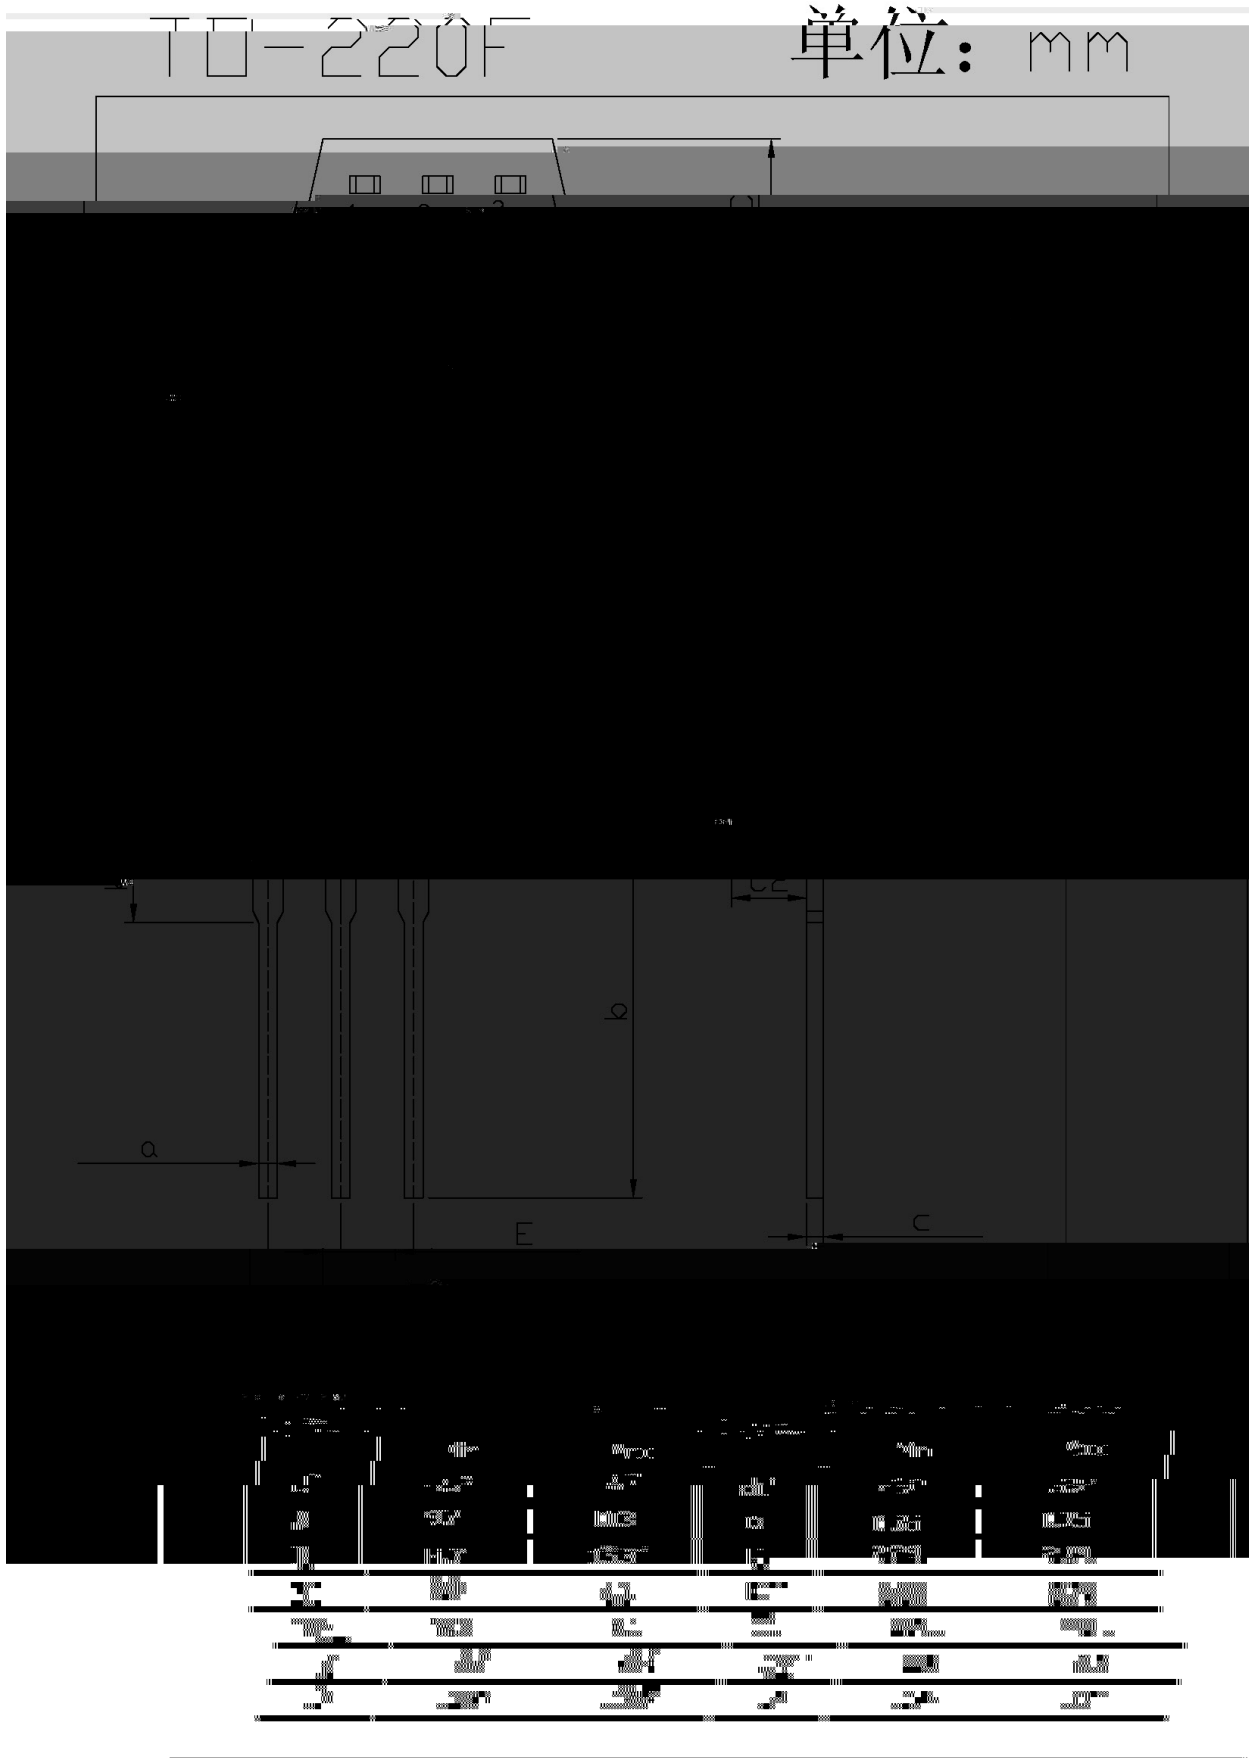

/ Marking Instructions

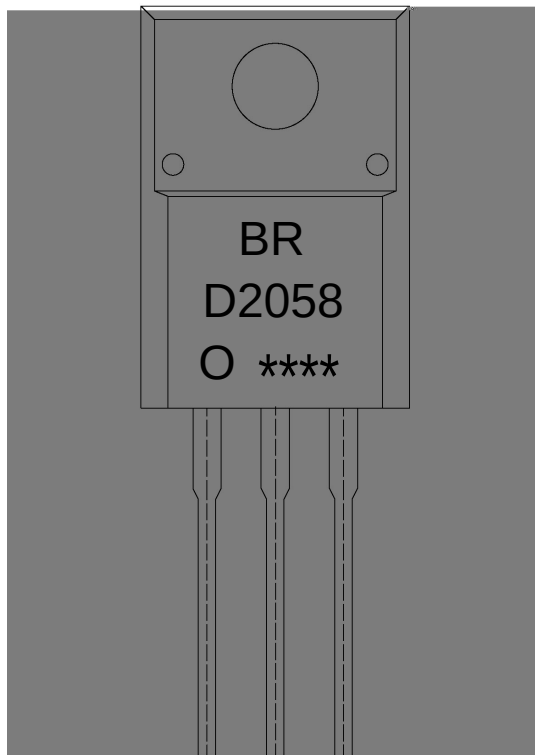

BR

D2058

O:

Note:


BR: Company Code.

D2058: Product Type.

O: h_{FE} Classifications Symbol.

****: Lot No. Code, code change with Lot No.

() / Temperature Profile for Dip Soldering(Pb-Free)

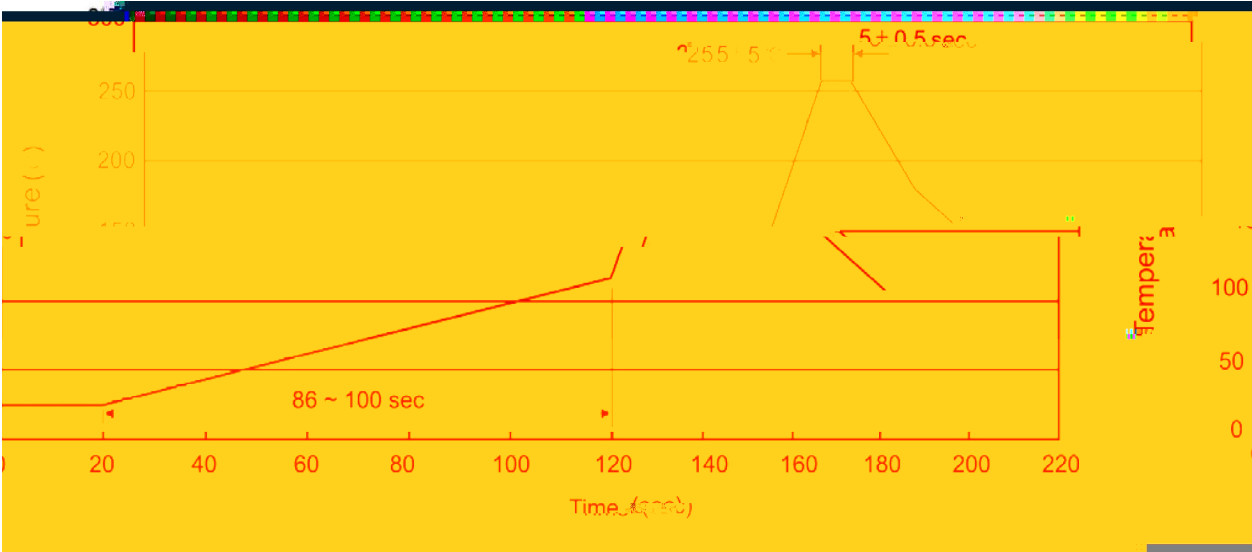

Note:

- 1

25 150

60 90sec;
- 2

255±5

5±0.5sec;
- 3

2 10 /sec.
- 1.Preheating:25~150 , Time:60~90sec.

2.Peak Temp.:255±5 , Duration:5±0.5sec.

3. Cooling Speed: 2~10 /sec.

/ Resistance to Soldering Heat Test Conditions

270±5

10±1 sec.

Temp:270±5

Time:10±1 sec

/ Packaging SPEC.

/ BULK

Package Type	Units					Dimension (unit mm3)		
	Units/Bag /	Bags/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Bag	Inner Box	Outer Box
TO-220F								