

/ Descriptions

WR0577


/ Features

H_{FE} H_{FE}


/ Applications

RU0ing GF0GF

/ Equivalent Circuit



/ Pinning

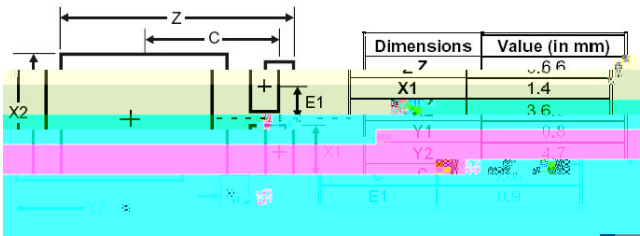

/ h_{FE} Classifications & Marking

/ Absolute Maximum Ratings(Ta=25)

	N		μ
	θ		

/ Electrical CharacterA3aics(Ta=25)





	N					μ
						μ

2
41 FU07 SFE 5 Ⅱ H


51

61


/ Electrical Characteristic Curve

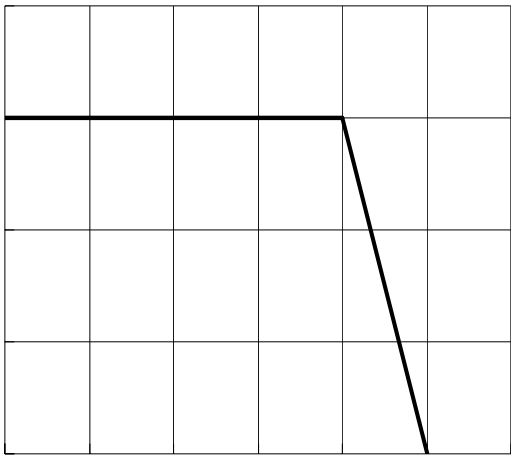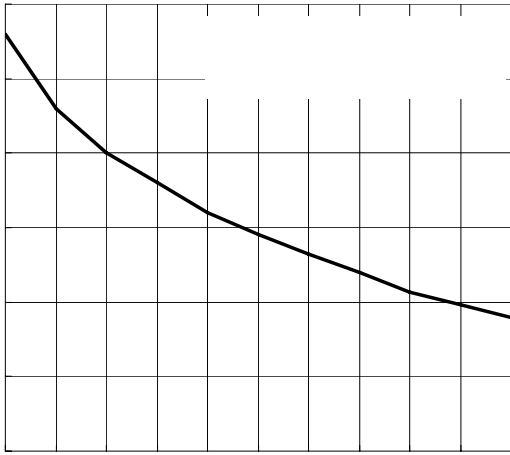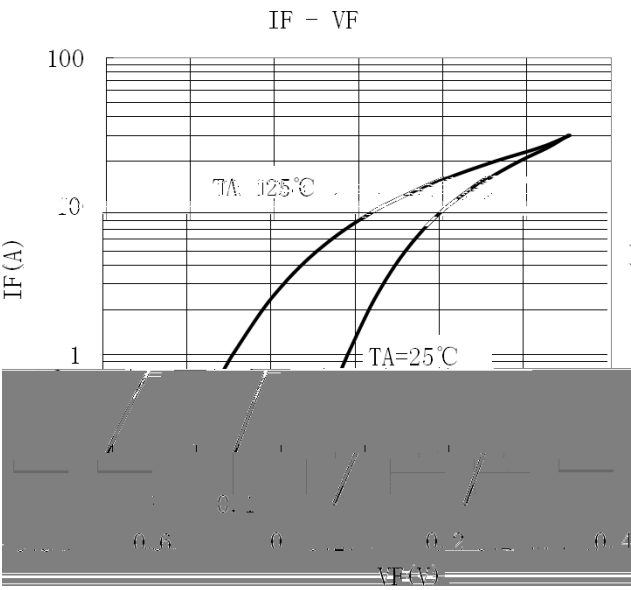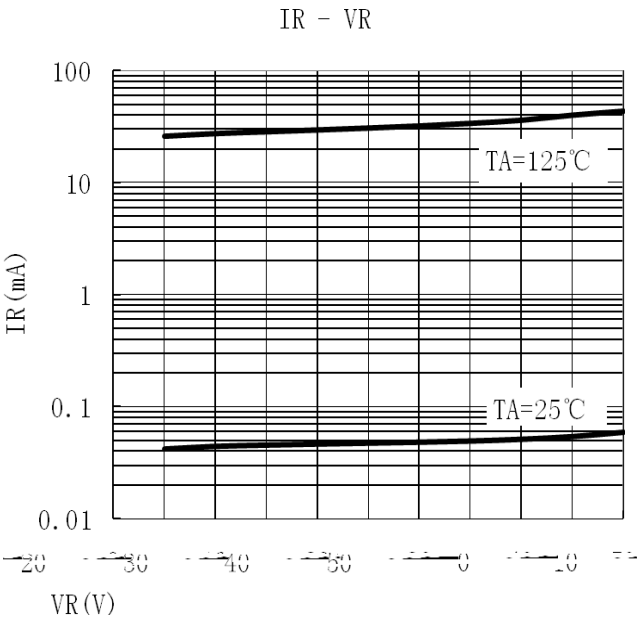

/ Package Dimensions

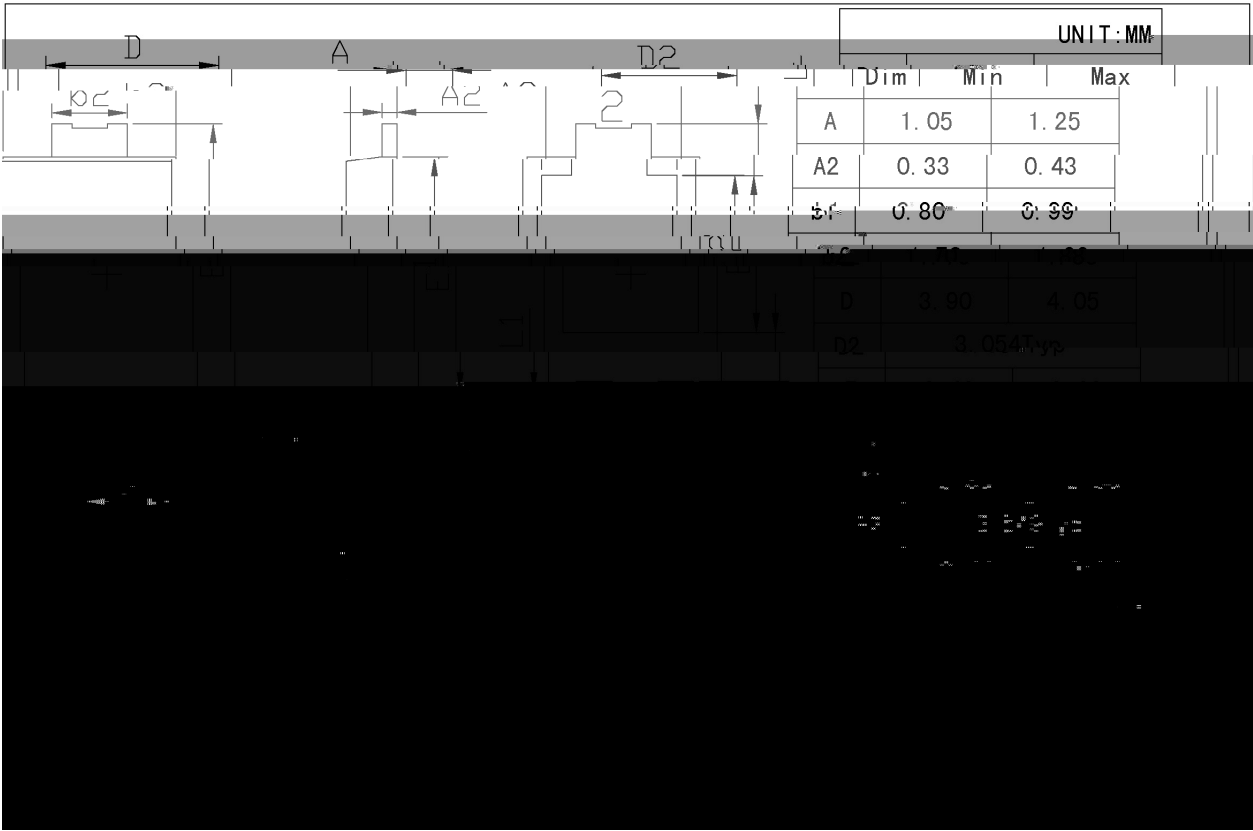

/ Marking Instructions

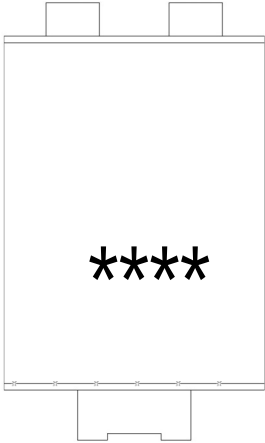

48V83	N	
****	N	N
48V83		



() / Temperature Profile for IR Reflow Soldering(Pb-Free)

[illegible] $\pm$ $\pm$ $\pm$ $\pm$

/ Resistance to Soldering Heat Test Conditions

 $\pm$ $\pm$ / **Packaging SPEC.**

形式	Units/Reels	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Reel	Inner Box	Outer Box
式	箱	盒	箱	箱		盒	箱