

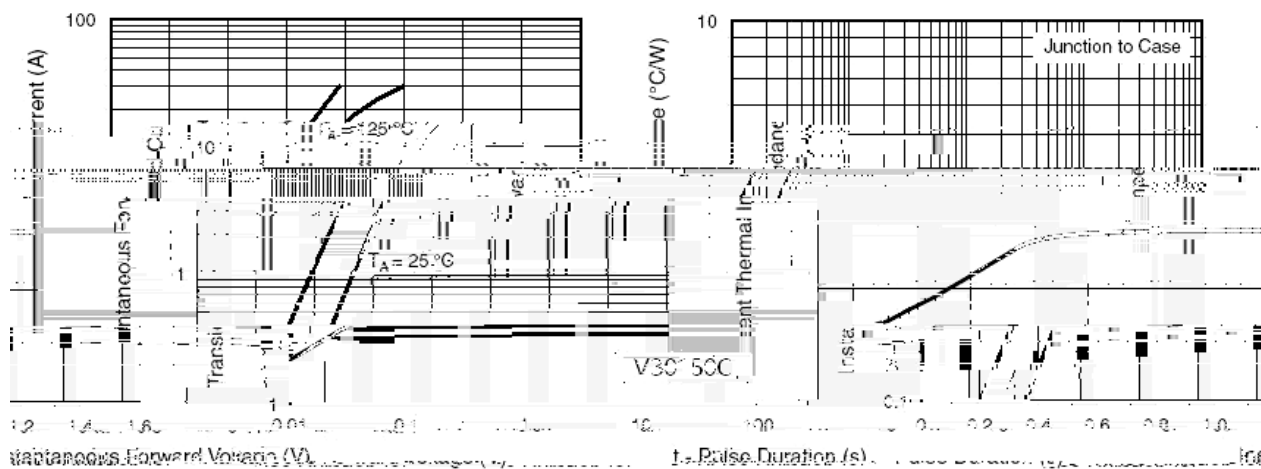
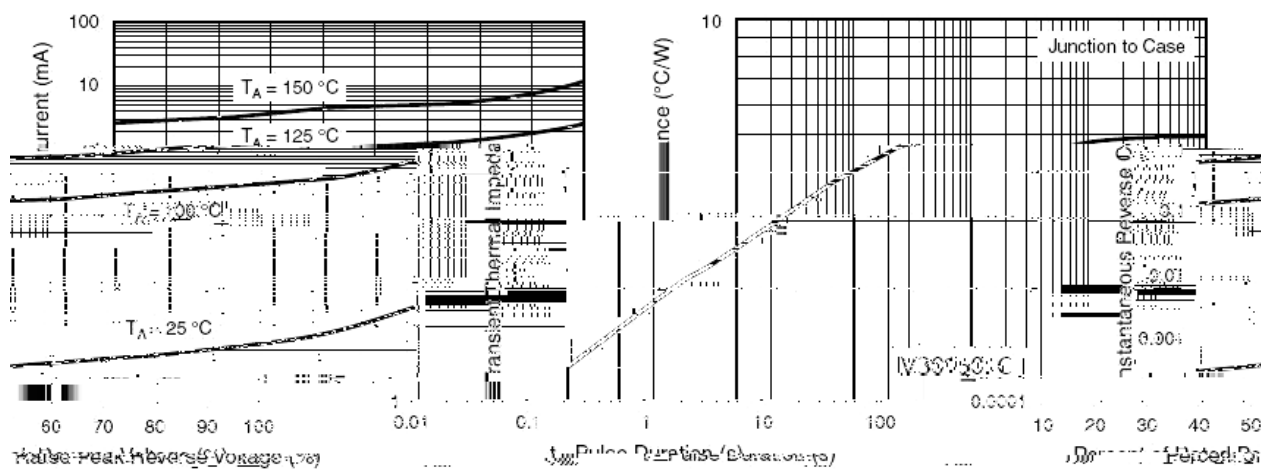


Ƶ Ƨ	Ƨ N	Ƨ Ƨ	D Ƨ


/ Electrical Characteristic Curve

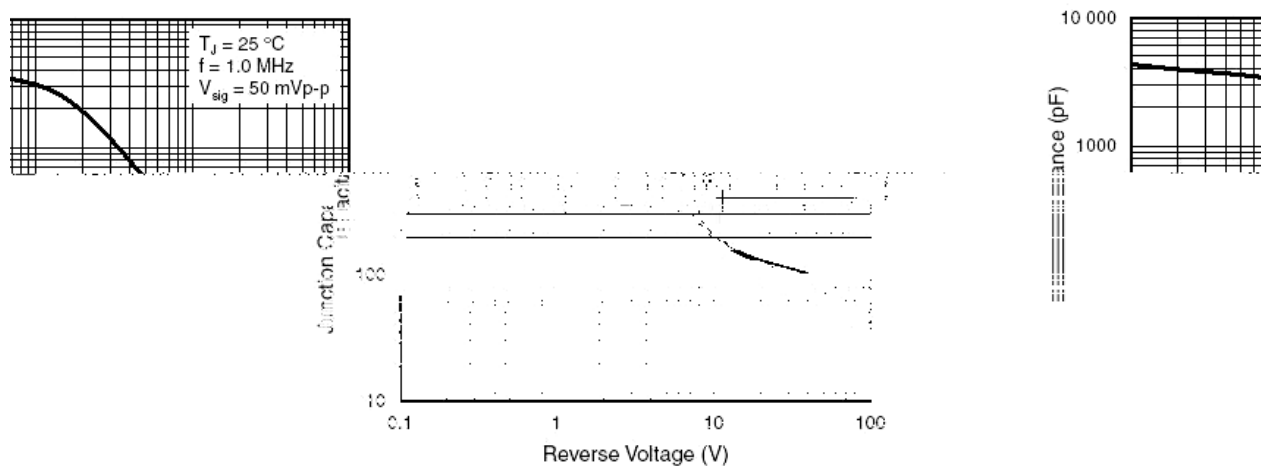

/ Package Dimensions

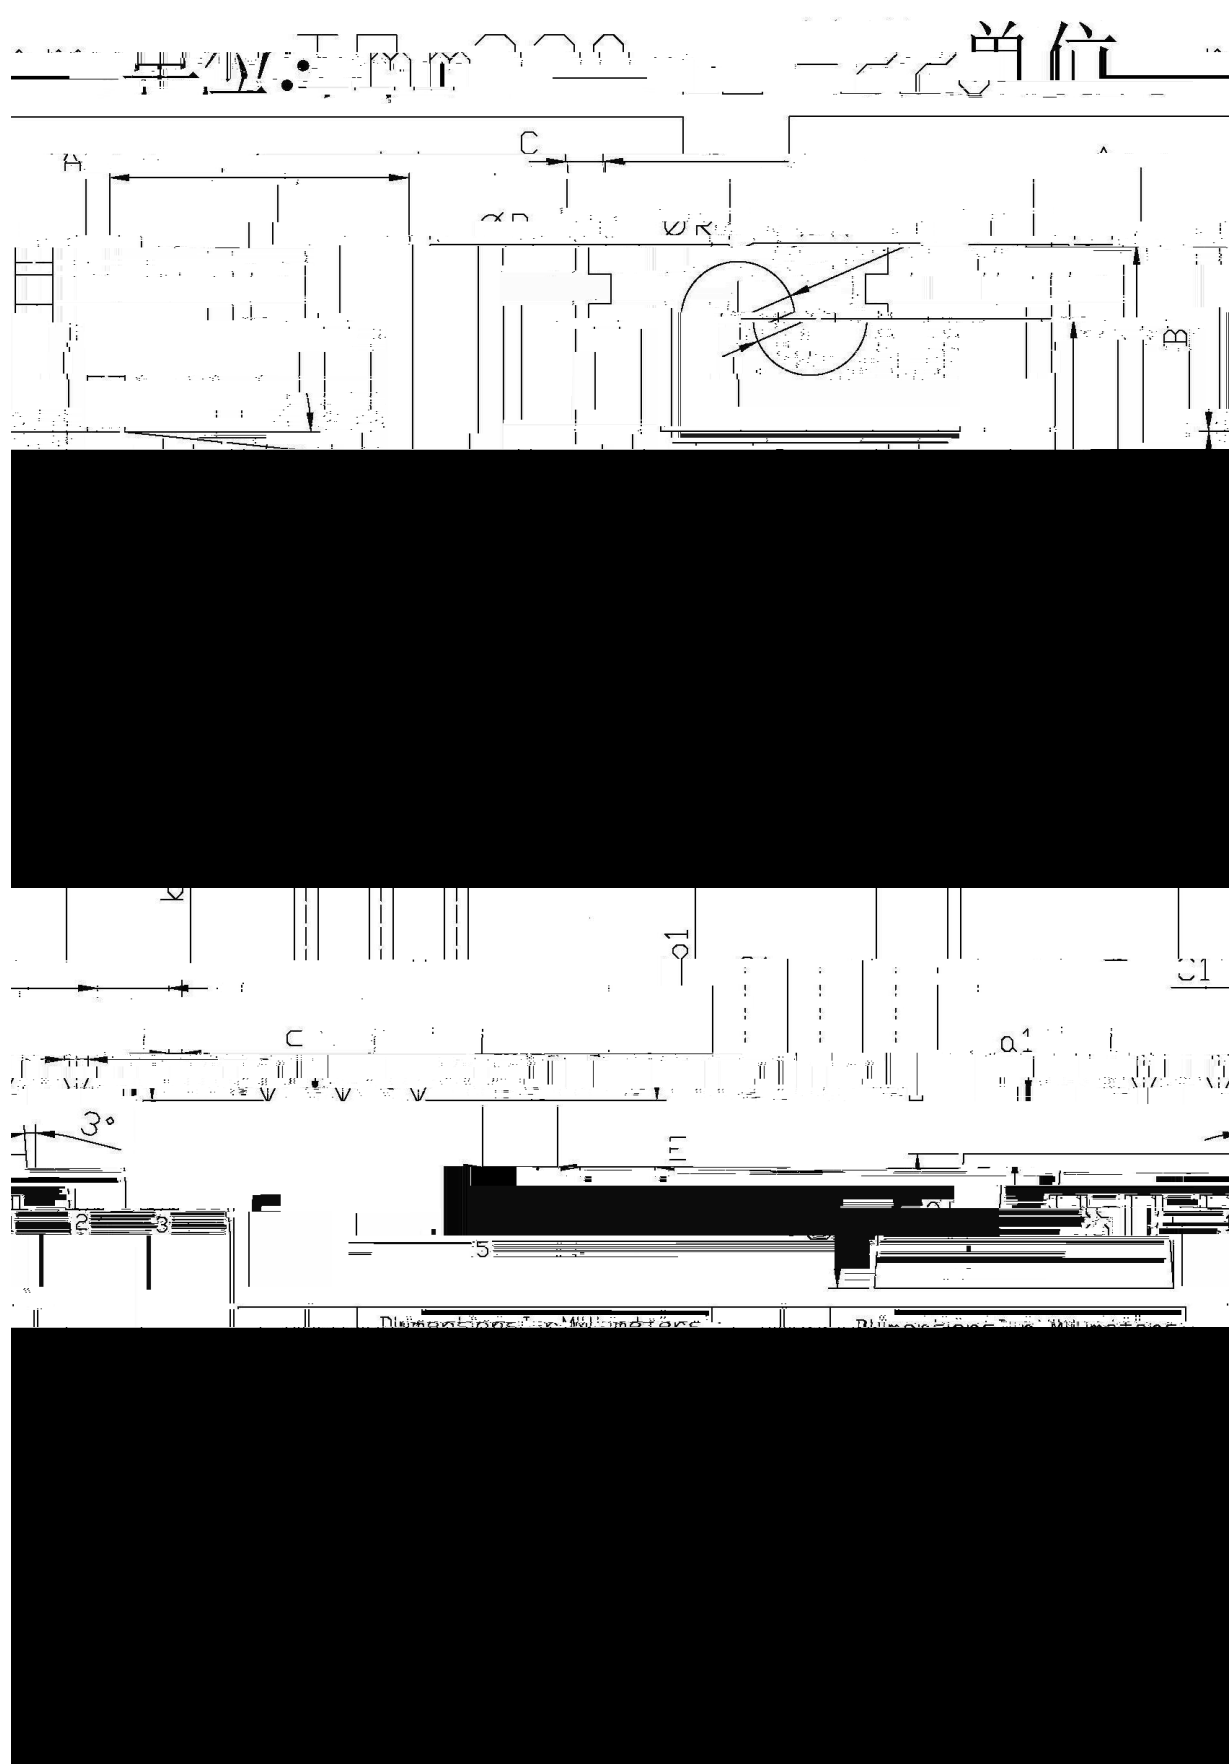

/ Marking Instructions

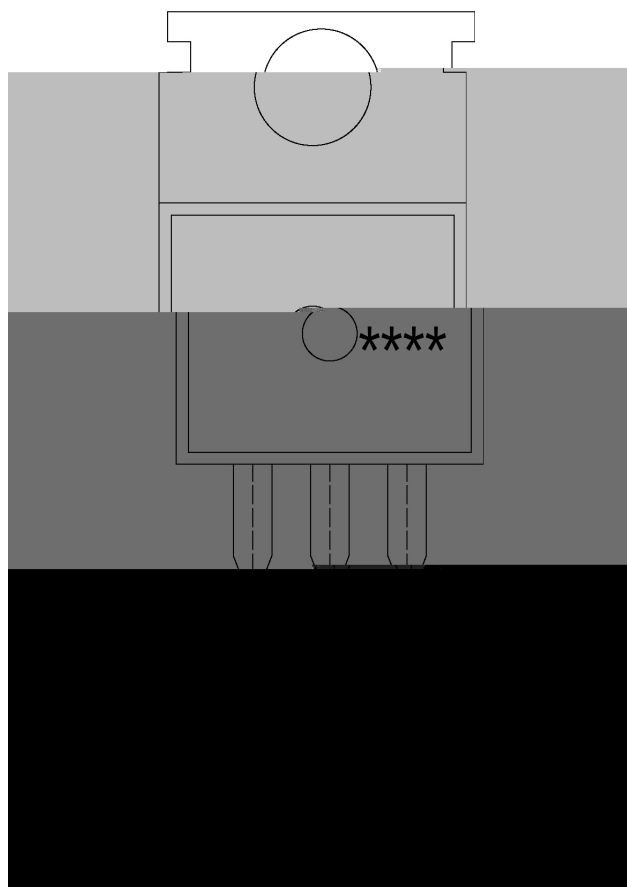

ب"خ

EU χ

0Y63483 χ

FW=


--- x

ᠬᠠᠭ ᠰᠢ ᠠᠨᠤᠨᠠ

$$\mathbb{H} \quad f \quad \beta \quad \mathfrak{Z} \quad N$$
$$H \cap U \cap V =$$
$$\mathbb{H} \cdot f \check{\eta}^N \mathbb{P}_b \quad \text{I} \cdot \mathbb{E} \cdot f \check{\eta}^N \Psi \mathbb{P}$$

x

() / Temperature Profile for Dip Soldering(Pb-Free)

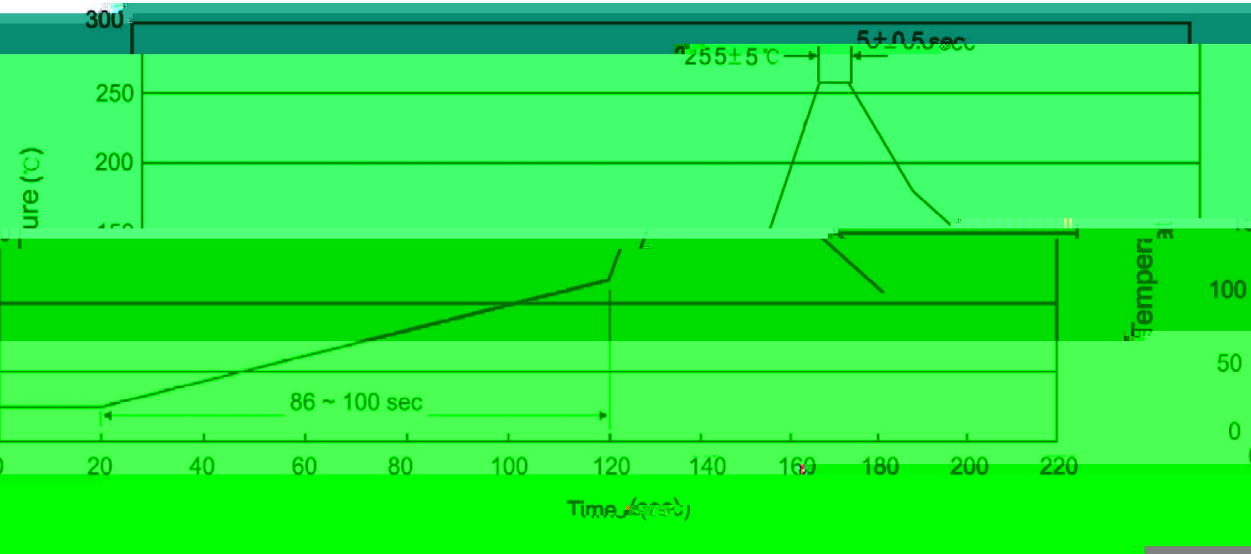

1. 温度曲线

2. 温度曲线

3. 温度曲线

/ Resistance to Soldering Heat Test Conditions

1. 温度曲线

/ Packaging SPEC.

1. 温度曲线

	Units/Bag	Bags/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Bag	Inner Box	Outer Box
TO-220/F	200	10	2,000	5	10,000	135×190	237×172×102	560×245×195

1. 温度曲线

	Units/Tube	Tubes/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Tube	Inner Box	Outer Box
TO-220/F	50	20	1,000	5	5,000	532×31.4×5.5	555×164×50	575×290×180

/ Notices