

TO-3P



Schottky Barrier Diode in a TO-3P Plastic Package.

Low forward voltage drop, low power losses, High efficiency operation.

OR-ing



DC-DC


For use in high frequency inverters, switching power supplies, freewheeling diodes, OR-ing diode, dc-to-dc converters and reverse battery protection.




PIN1 Anode PIN 2 Cathode PIN 3 Anode

See Marking Instructions.

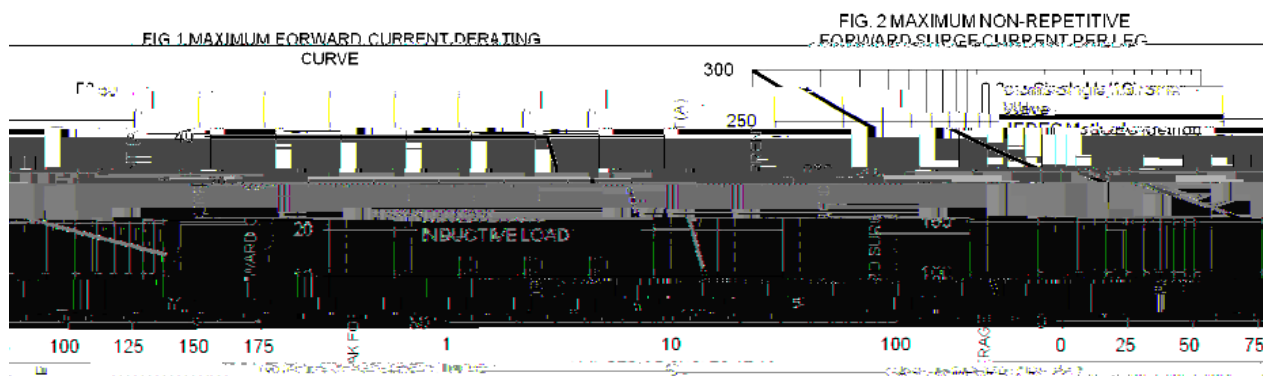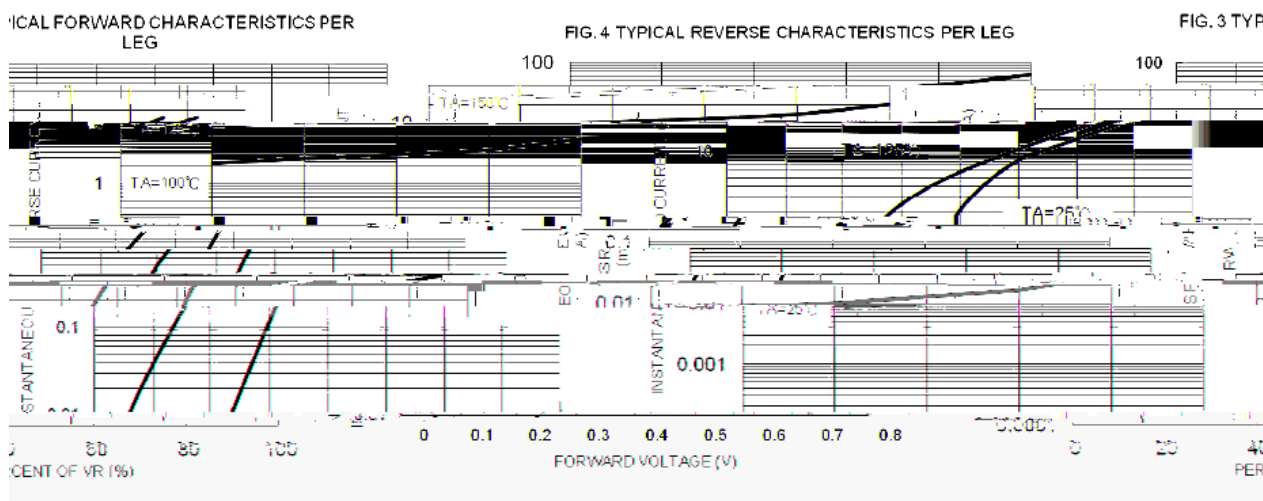

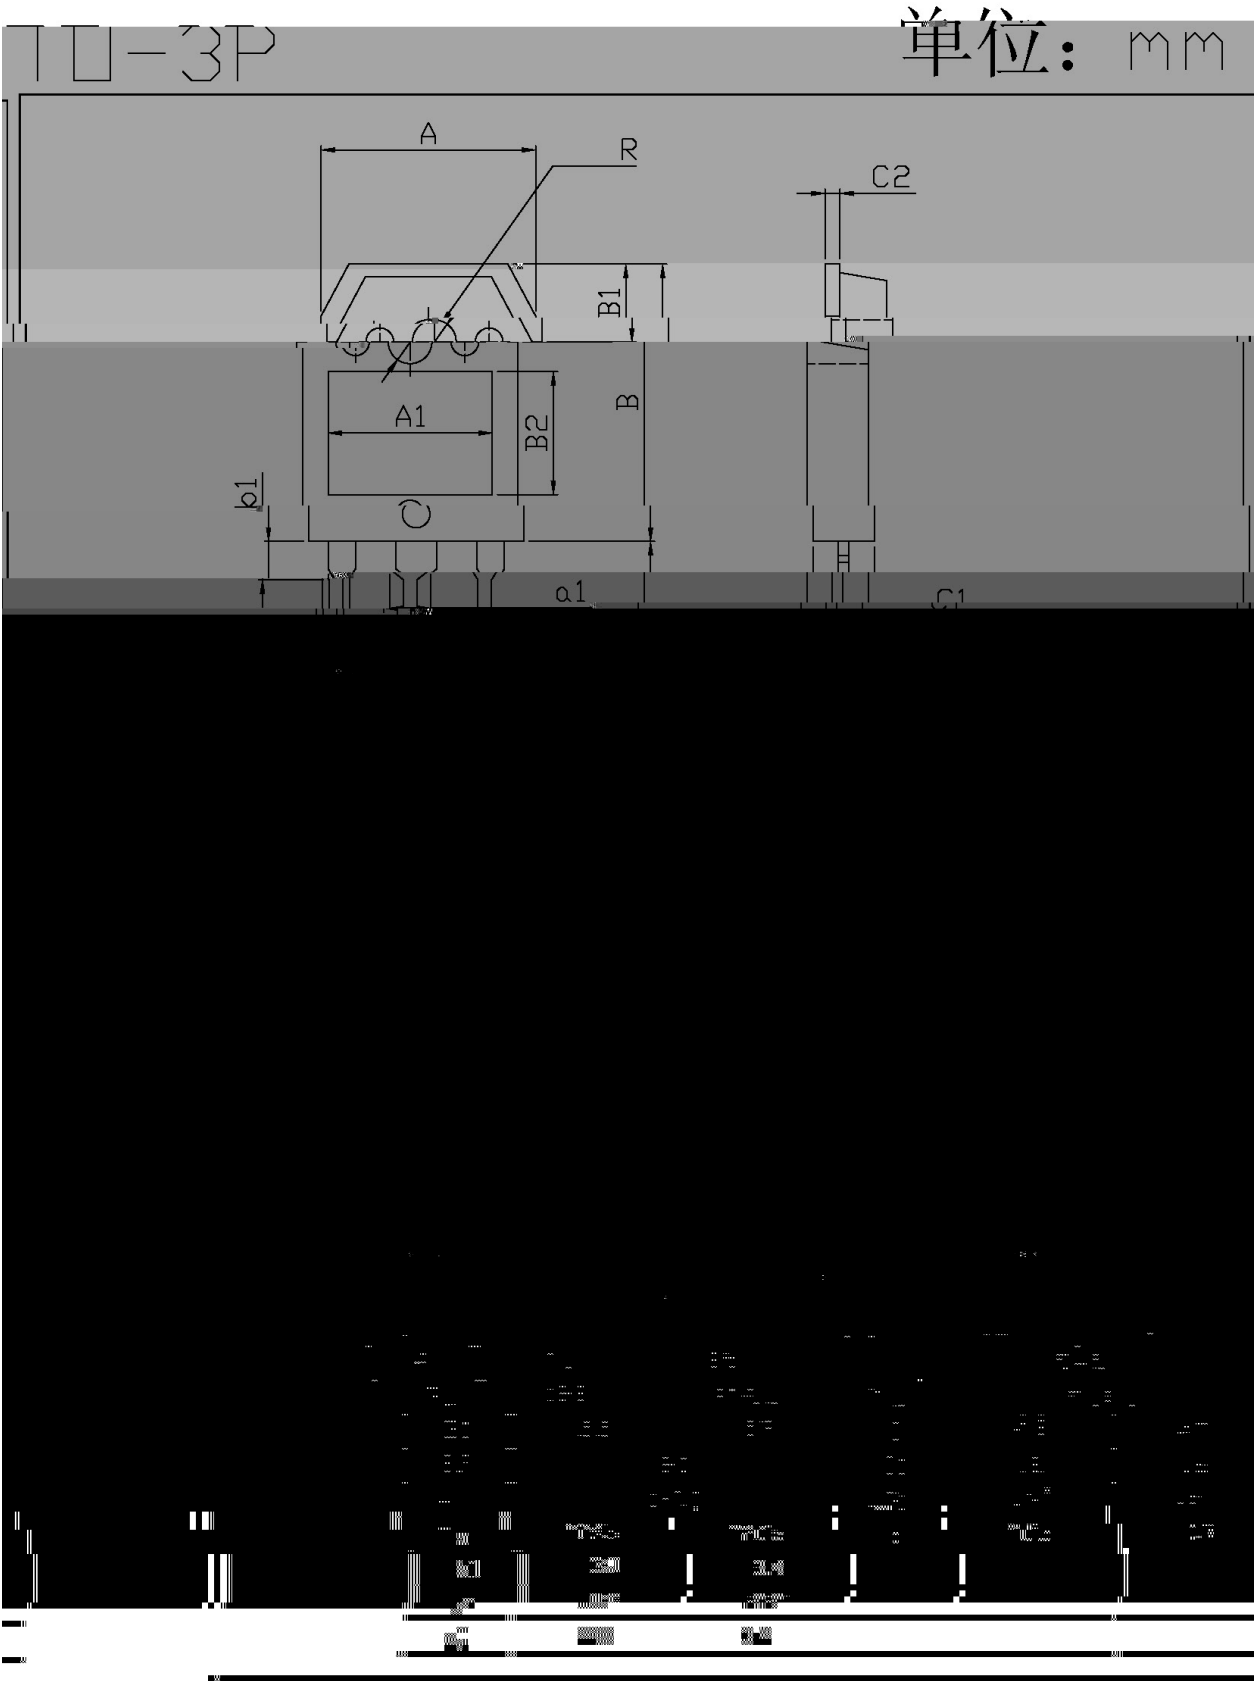

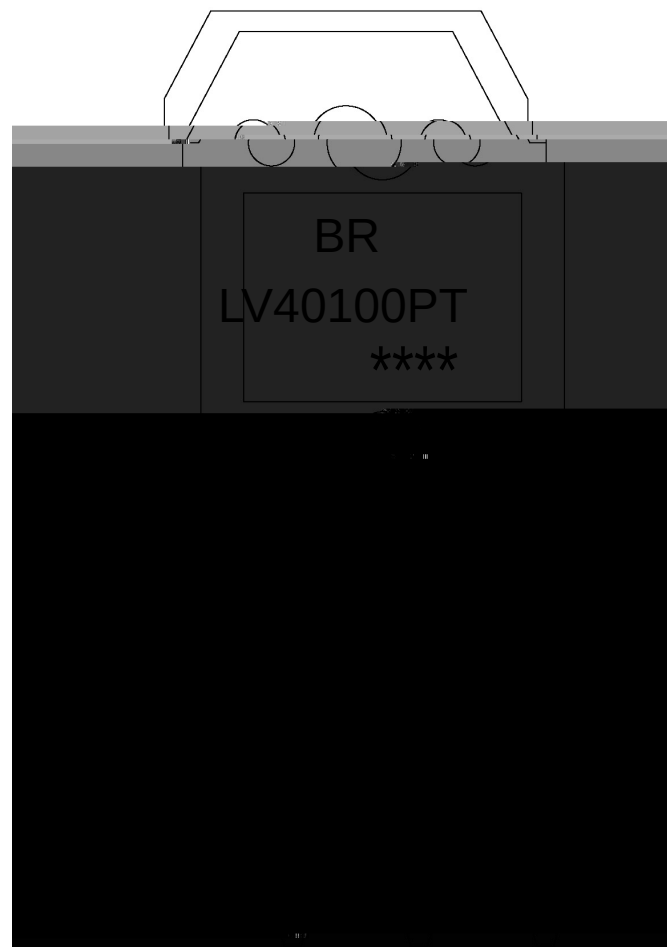

BR


LV40100PT

Note:

BR: Company Code.

LV40100PT: Product Type.

****: Lot No. Code, code change with Lot No.

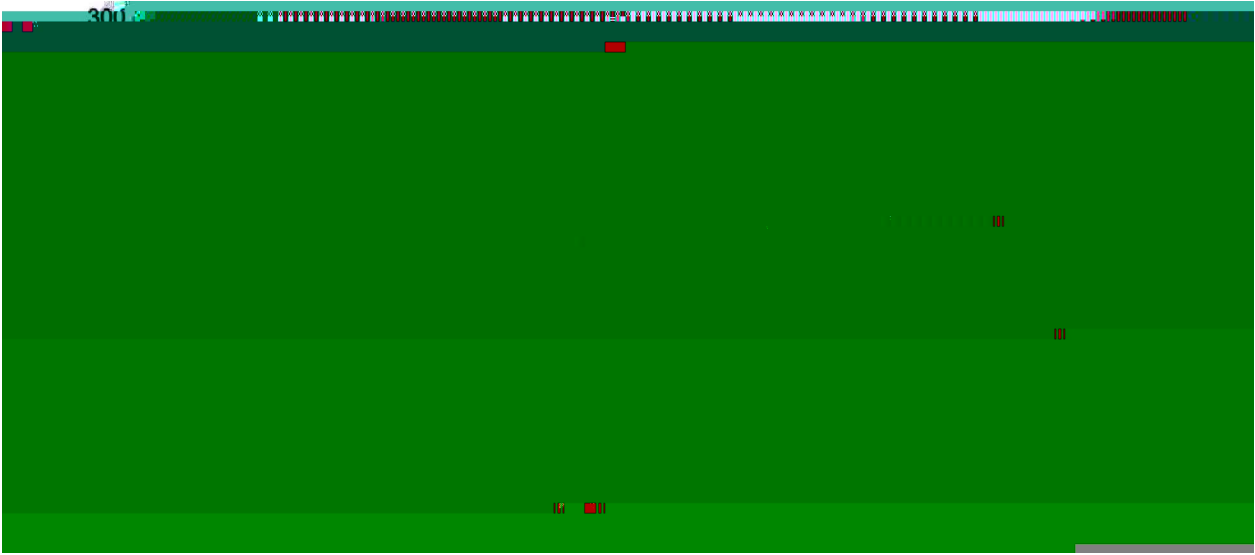

				Note:
1	25	150	60 90sec;	1.Preheating:25~150 , Time:60~90sec.
2	255±5		5±0.5sec;	2.Peak Temp.:255±5 , Duration:5±0.5sec.
3		2 10	/sec.	3. Cooling Speed: 2~10 /sec.

±