

/ Revised record


#

A	2021-4-7		W15		

#

#

MB05F~MB10F



!"#\$%&'(')##### DATA SHEET

/ Descriptions

)" 5 6 7 #
)" #89%/:2 #539;+#<=:00#>:00? :+ @#6%?@A # 2+/? % 5 6 7#+*?;#\$:2B:A #

/ Features

50V~1000V 1A


RoHS

<=:00#>:00? :+ @#C*?\$#D9;2+?3;E# %0 #F3=:A ,G(+3)((FE#73%.:%#C9%% ;+,)"#E#H?A*#89%A #
 C9%% ;+#C:\$:1?=?+IE#J3.#73%.:%#F3=:A #K%3\$E J :@#.;@#13@I#:223%@?;A#.?+*# 3H8#0+.;@:%%@
 H=:3A ;#/% #3@92+!#

/ Applications

< ; %:=\$9\$30 !#
 #

/ Equivalent Circuit



/ Pinning

#



..


#

#

/ Marking#

8 #5 :%B?;A#L;0+%92+?3;0!#

MB05F~MB10F




!"#\$%&'(')##### DATA SHEET
#

参数# >: %: 4 + % #	符号# 8 4 13 = #	数值# : + ? ; A #							单位# M ; ? + #
		5 6 (G 7	5 6) 7 #	5 6 ' 7 #	5 6 N 7 #	5 6 O 7 #	5 6 P 7 #	5 6) (7 #	
5 : Q ? 4 9 4 # 2 9 % % ; + # > : B # % 0 # F 3 = + : A #	F 5 #	G (#	) ((#	' ((#	N ((#	O ((#	P ((#	) (((#	F #
5 : Q ? 4 9 4 # 5 8 # F 3 = + : A #	F 5 8 #	R G #	S (#	) N (#	' P (#	N ' (#	G O (#	S ((#	F #
5 : Q ? 4 9 4 # K C # 6 = 3 2 B ? ; A # F 3 = + : A #	F K C #	G (#	) ((#	' ((#	N ((#	O ((#	P ((#	) (((#	F #
" % : A # 2 + ? / ? @ # T 9 + \$ 9 + # C 9 % % ; + # : + # U : # V # N (° C	L 7 W " F X #	) #							" #

> : B # 7 3 % . : % @ # 8 9 % A #
C 9 % % ; + E P ! R 4 0 # O ? ; A = #
* : = / & 0 ? ; & . : # 0 9 \$ % ? 4 \$ 3 0 @ # L 7 8 5 # R (# " > U
3 ; # % : + @ # = 3 : @ #

MB05F~MB10F




!"#\$%&' (')##### DATA SHEET

#

/ Electrical Characteristic Curve

#

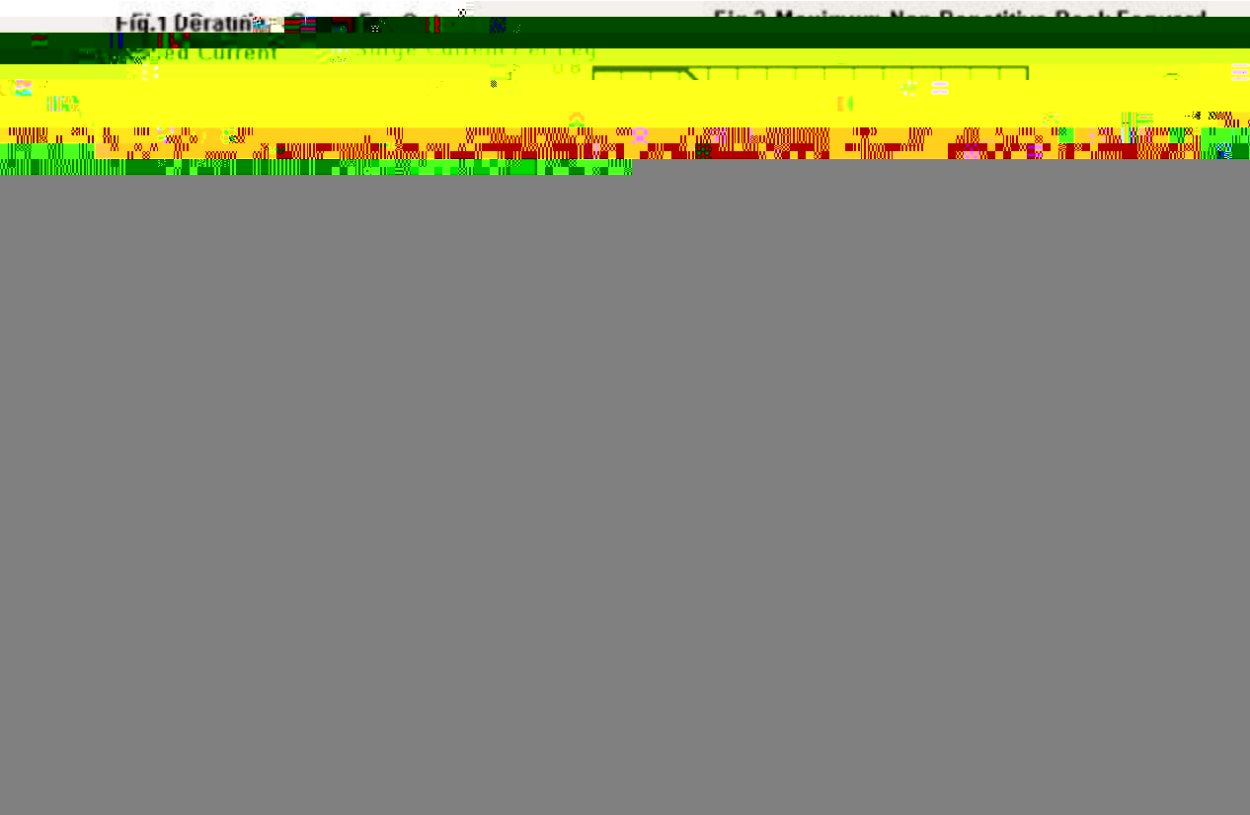

#

#

#

MB05F~MB10F




!"#\$%&' (') ##### DATA SHEET
#

/ Package Dimensions



#



#

/ Marking Instructions

#

#

#

#

#

#

#

#

#

#

#

#

#

#

#

#

#

#

5 6 (G7 ##### #

^w^ # #####) ^ R ^ #

_3+ ,

MB05F~MB10F

! " \$ % & ' (') ##### DATA SHEET

#

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

[illegible]

_3+ ,#
))G()P(O(a(0 2b# # #)!>% * :+?;A,)G(c)P(°C£#U?4 ,0(ca(0 2!#
' 'NG±G G±(!G0 2b# # #'!> :B#U 4\$!, 'NG±G°C£#K9% :+?3;,G±(!G0 2!#
R ')(°C-0 2!# # # # R! C33=?;A#8\$ @,#' c)(°C-0 2!#
#

/ Resistance to Soldering Heat Test Conditions

#

'O(±G°C# #) (±)#0 2!# # # # U 4\$, 'O(±G°C# # U?4 ,) (±)#0 2#

#

/ Packaging SPEC.

##-## ddJ#

~~x:2B:A #UI\$ #
!#
M;?0 " # \$#
K?4 ;0?3;## " % &## ||9;? ' 4 4 X# n~~