!"#$% #!"#$&
Rev.E Jan.-202

0.5A MBF

0.5A Surface Mount Glass Passivated Bridge Rectifier，MBF thin package。

&

100V~1000V 0.5A

Glass Passivated Chip Junction, Reverse Voltage:100to1000V, Forward Current：0.5A, High Surge Current Capability, Designed for Surface Mount Application，Halogen free product.

&

.

General purpose.= Ṅ

&&

'#MN d 4 ł B

!" ɜ ff

5.2145 420

¡ #

&&.&&C96:9<0&'2G0;327;3&

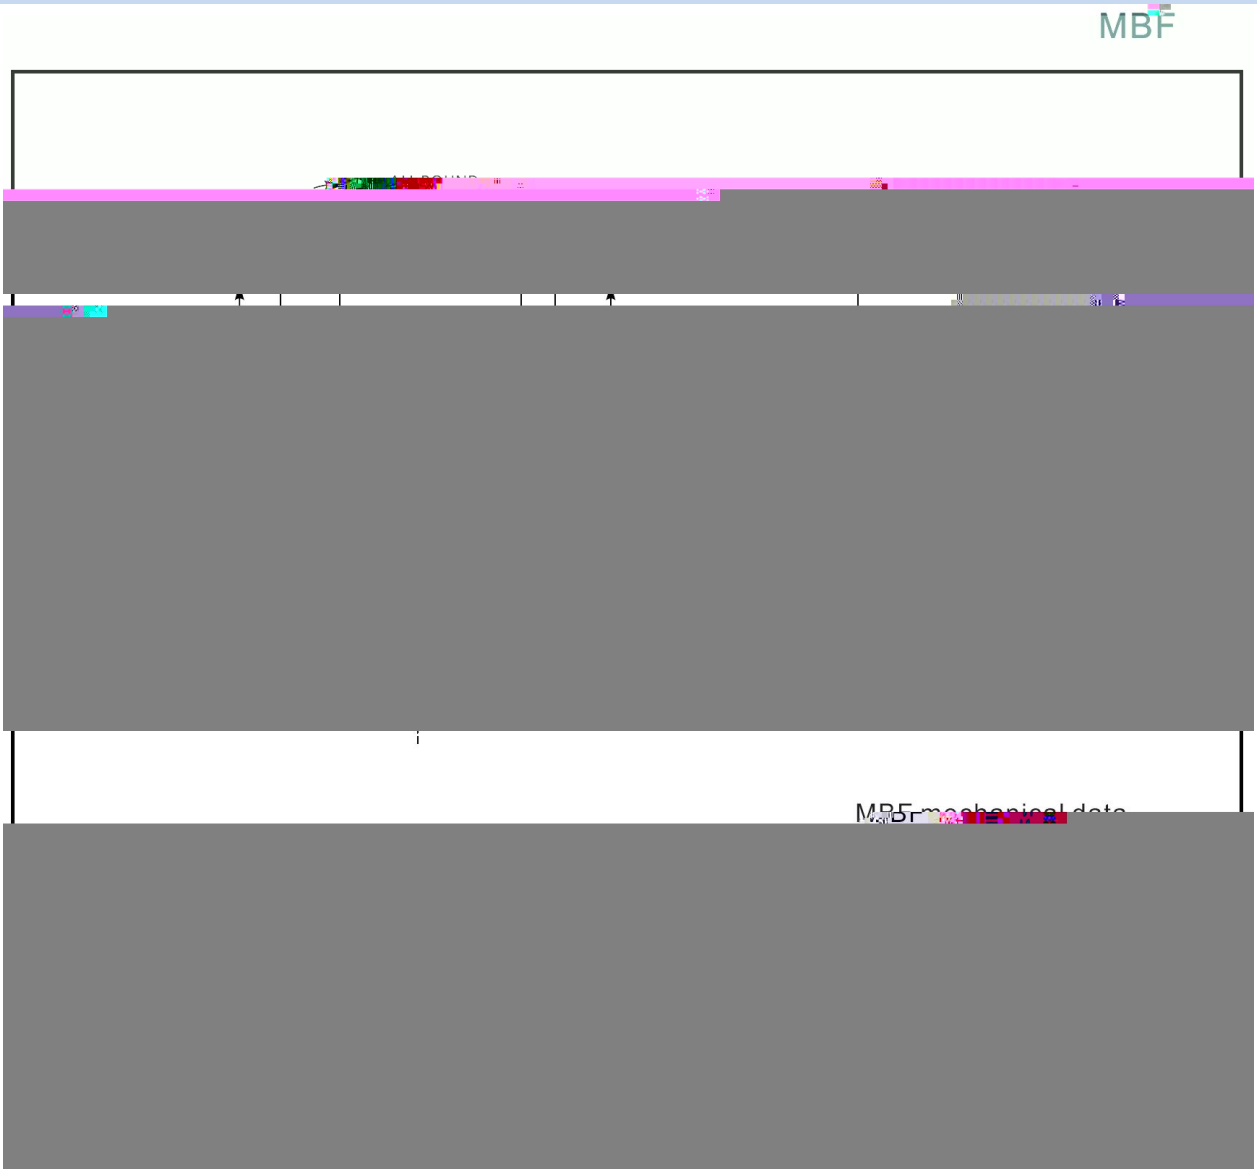

&&.&& 95:2;<&N;3>5?6>27;3&
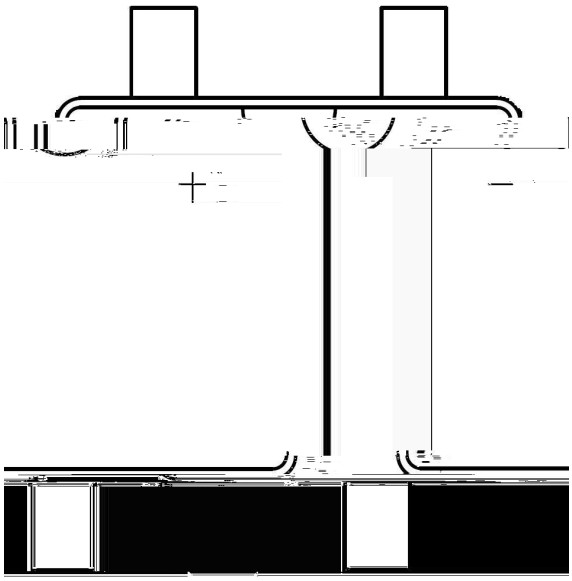
& &