



Silicon NPN transistor in a TO-252 Plastic Package.

High collector-Emitter breakdown voltage, Suitable for transformer, HF Product.

High voltage general purpose applications.

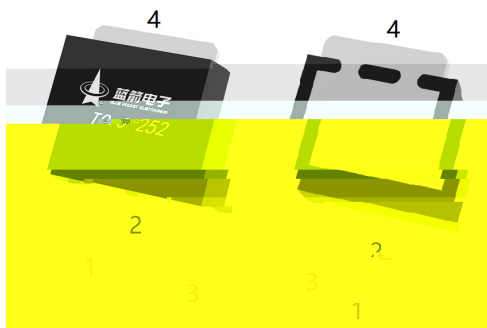


PIN1 Base PIN 2,4 Collector PIN 3 Emitter

See Marking Instructions.

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}		




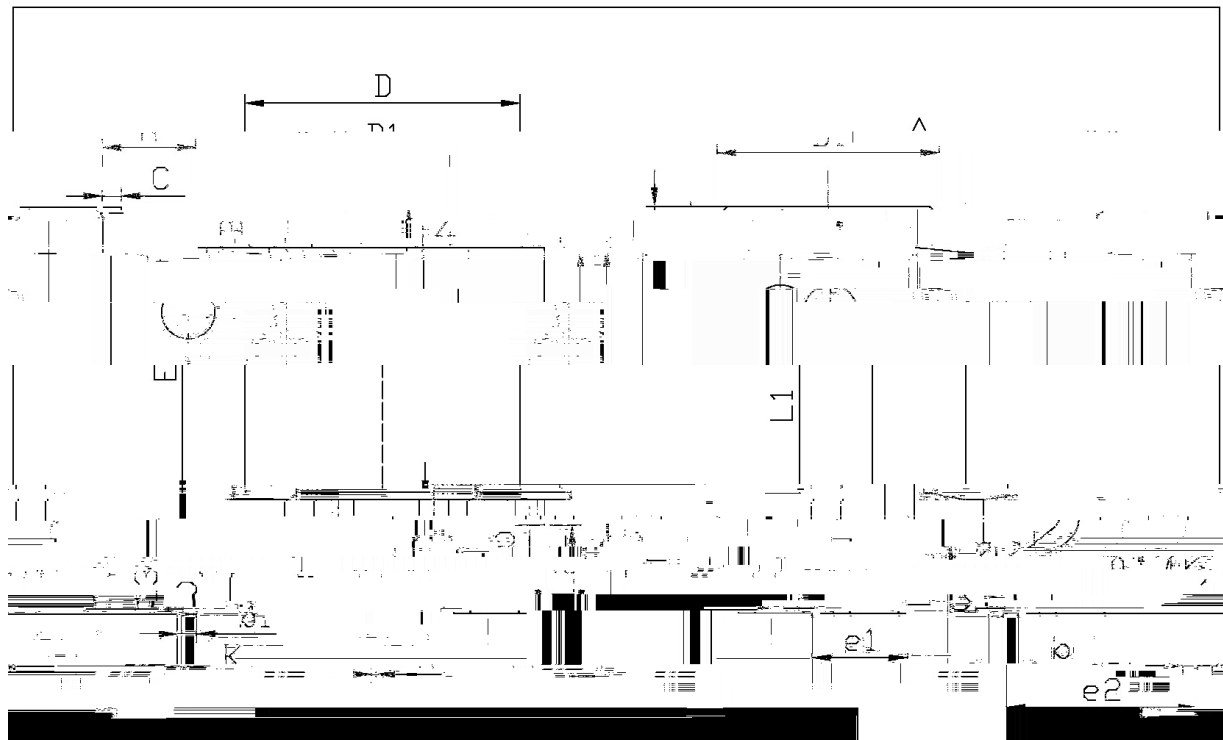

单位: mm

Max	Symbol	Min	Max	Symbol	Min
6.25	A	2.30	2.40	F	5.95
0.50	B	0.45	0.55	L1	9.45
0.45	C	0.55	0.60	L2	9.45
0.60	D	0.55	0.65	L3	9.45
0.60	E	0.55	0.65	L4	9.45
0.60	G	0.55	0.65	L5	9.45
0.60	H	0.55	0.65	L6	9.45
0.60	I	0.55	0.65	L7	9.45
0.60	J	0.55	0.65	L8	9.45
0.60	K	0.55	0.65	L9	9.45
0.60	L	0.55	0.65	L10	9.45
0.60	M	0.55	0.65	L11	9.45
0.60	N	0.55	0.65	L12	9.45
0.60	O	0.55	0.65	L13	9.45
0.60	P	0.55	0.65	L14	9.45
0.60	Q	0.55	0.65	L15	9.45
0.60	R	0.55	0.65	L16	9.45
0.60	S	0.55	0.65	L17	9.45
0.60	T	0.55	0.65	L18	9.45
0.60	U	0.55	0.65	L19	9.45
0.60	V	0.55	0.65	L20	9.45
0.60	W	0.55	0.65	L21	9.45
0.60	X	0.55	0.65	L22	9.45
0.60	Y	0.55	0.65	L23	9.45
0.60	Z	0.55	0.65	L24	9.45
0.60	AA	0.55	0.65	L25	9.45
0.60	AB	0.55	0.65	L26	9.45
0.60	AC	0.55	0.65	L27	9.45
0.60	AD	0.55	0.65	L28	9.45
0.60	AE	0.55	0.65	L29	9.45
0.60	AF	0.55	0.65	L30	9.45
0.60	AG	0.55	0.65	L31	9.45
0.60	AH	0.55	0.65	L32	9.45
0.60	AI	0.55	0.65	L33	9.45
0.60	AJ	0.55	0.65	L34	9.45
0.60	AK	0.55	0.65	L35	9.45
0.60	AL	0.55	0.65	L36	9.45
0.60	AM	0.55	0.65	L37	9.45
0.60	AN	0.55	0.65	L38	9.45
0.60	AO	0.55	0.65	L39	9.45
0.60	AP	0.55	0.65	L40	9.45
0.60	AQ	0.55	0.65	L41	9.45
0.60	AR	0.55	0.65	L42	9.45
0.60	AS	0.55	0.65	L43	9.45
0.60	AT	0.55	0.65	L44	9.45
0.60	AU	0.55	0.65	L45	9.45
0.60	AV	0.55	0.65	L46	9.45
0.60	AW	0.55	0.65	L47	9.45
0.60	AX	0.55	0.65	L48	9.45
0.60	AY	0.55	0.65	L49	9.45
0.60	AZ	0.55	0.65	L50	9.45

12-252

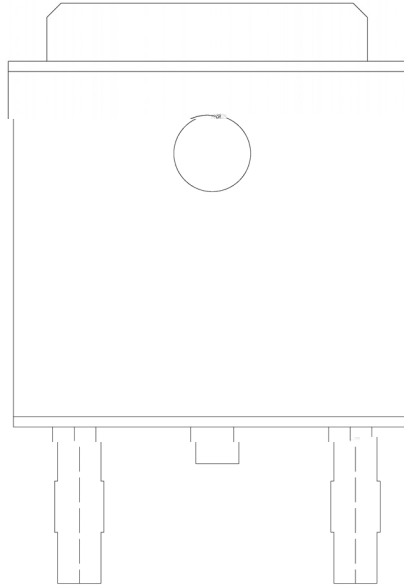

BR

