

MMBT2907AW

一、概述 / Descriptions

VRW0656 NPN SPS 集电极开路


二、特性 / Features

1、 工作电压


三、应用 / Applications

1、 驱动

四、等效电路 / Equivalent Circuit



五、封装 / Pinning




X X X

六、标识 / Marking

|  |  |
|--|--|
|  |  |
|  |  |


| Ƶ Ƨ | Ƨ N | Ƨ Ƨ | D Ƨ |
|-----|-----|-----|-----|
|     |     |     |     |
|     |     |     |     |
|     |     |     |     |
|     |     |     |     |
|     |     |     |     |

# $\beta$ A'E V f / Electrical Characteristic Curve

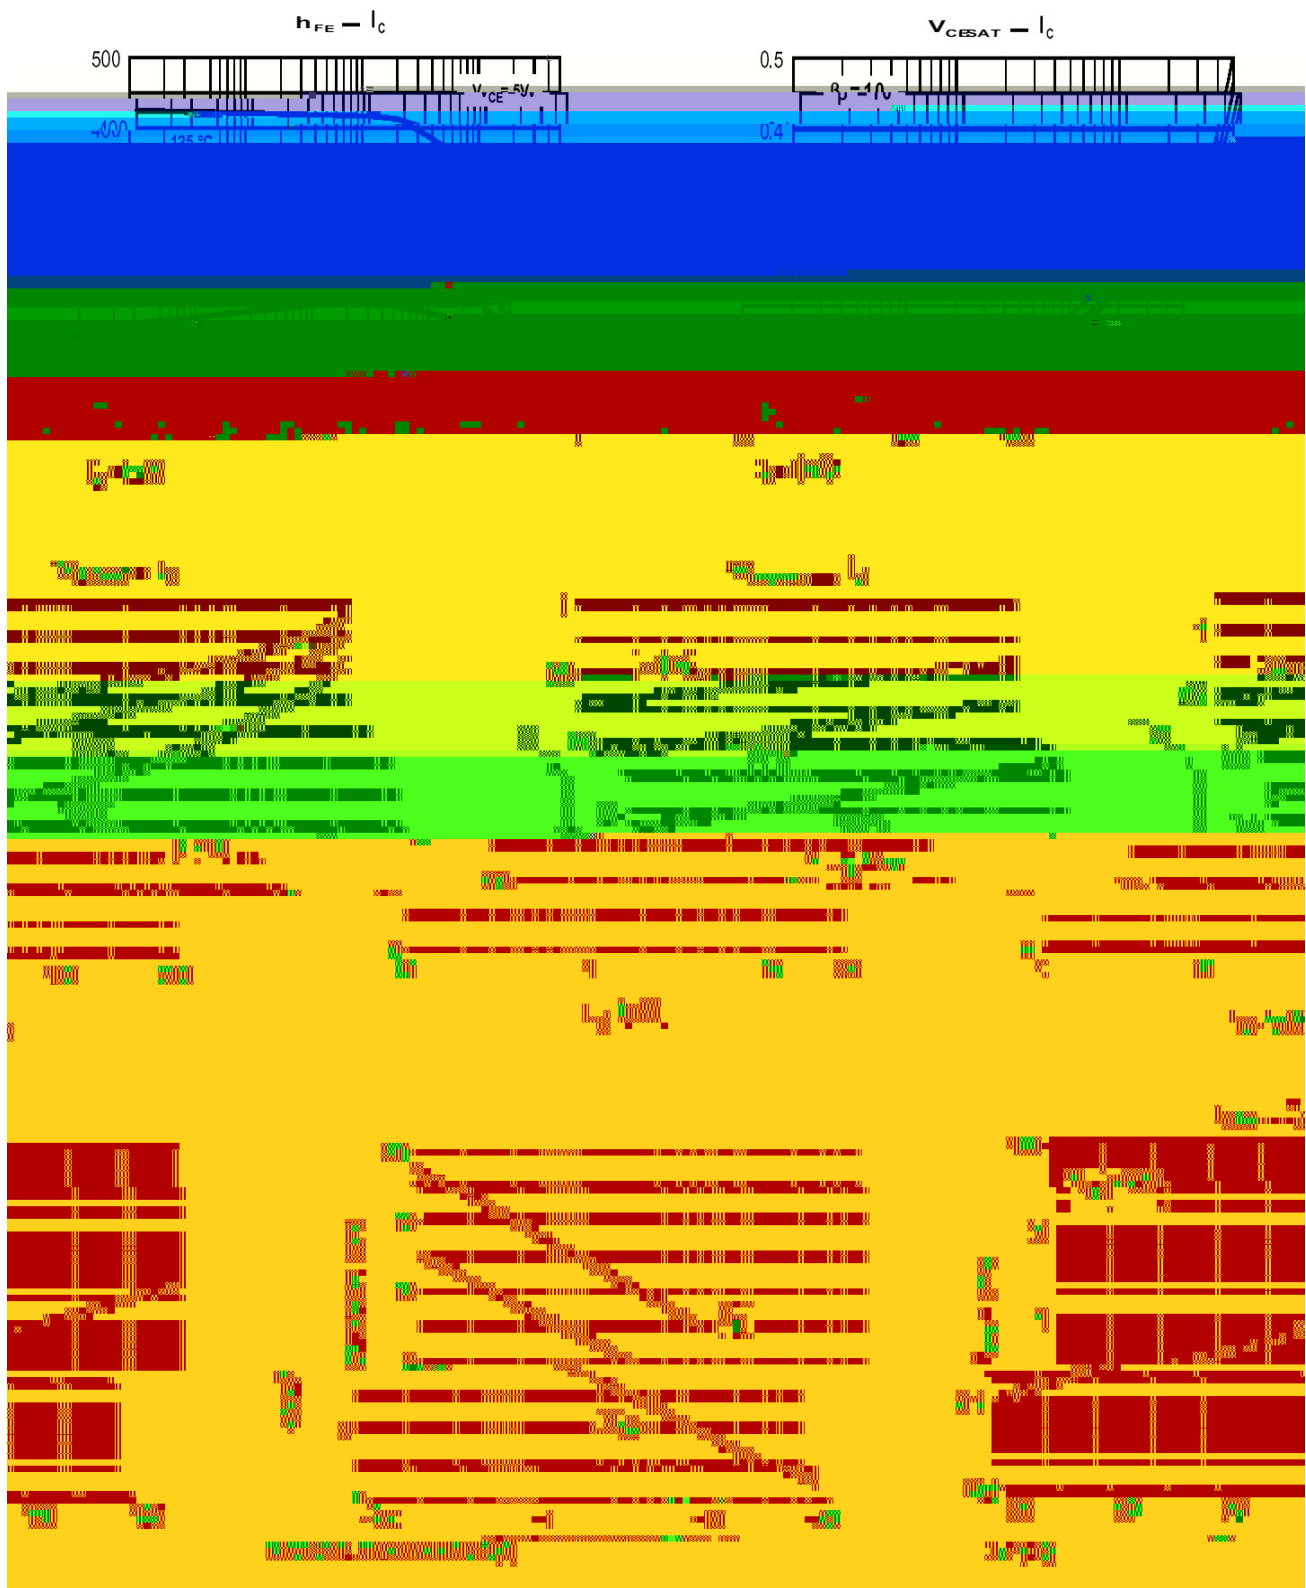




4. 1. 2 / Marking Instructions

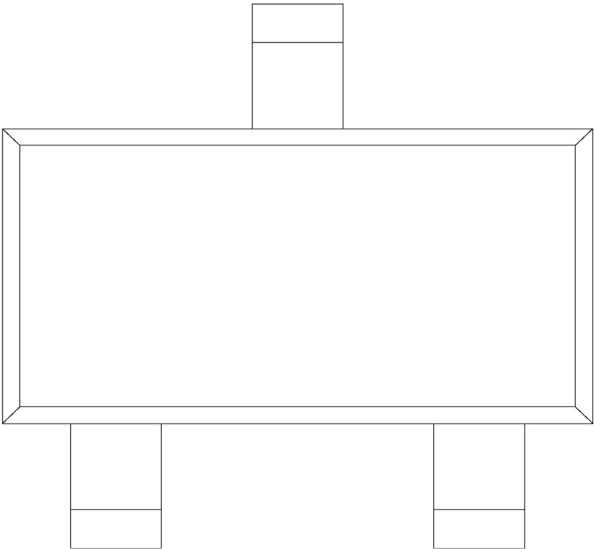

1. 2. 3. X  
X 1. 2. 3. X  
X 1. 2. 3. X

### Thermal Characteristic / Whp shudwxuh Suriloh i ru LU Uhior z Vroghulqj+Se0luhh,

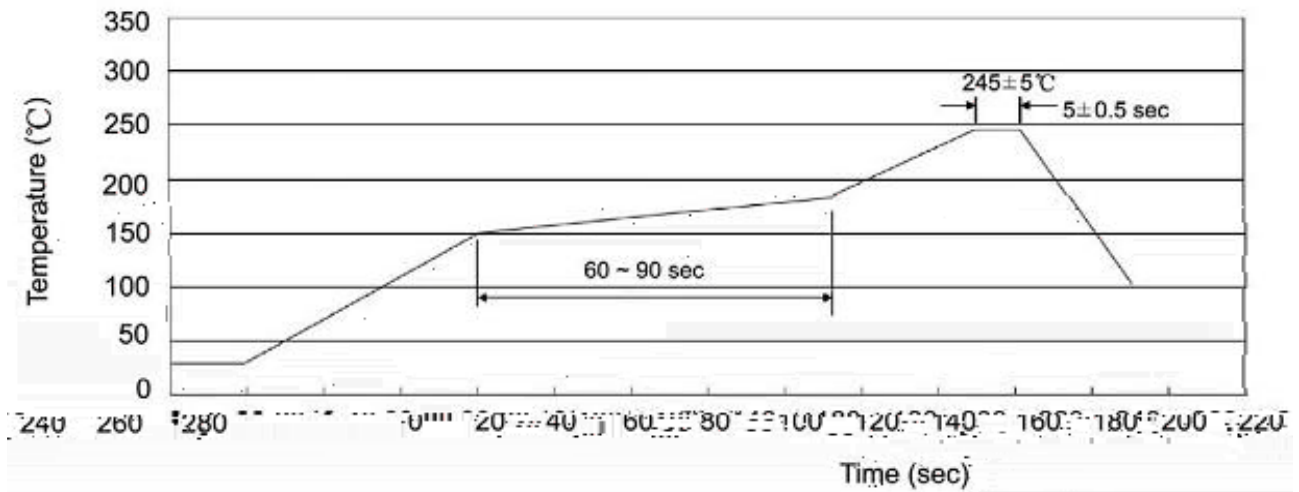

Thermal Characteristic

1. The device is tested at 25°C.  
 2. The device is tested at 150°C for 60~90 seconds.  
 3. The device is tested at 245±5°C for 5±0.5 seconds.

### Resistance to Soldering Heat Test Conditions

The device is tested at 245±5°C for 5±0.5 seconds.

### Packaging SPEC.

Package Specification

|         | Units/Reel | Reels/Inner Box | Units/Inner Box | Inner Boxes/Outer Box | Units/Outer Box | Reel  | Inner Box   | Outer Box   |
|---------|------------|-----------------|-----------------|-----------------------|-----------------|-------|-------------|-------------|
| SOT-323 | 3,000      | 10              | 30,000          | 6                     | 180,000         | 7 × 8 | 180×120×180 | 390×385×205 |

### Notices