


! "# \$ % &



&



SOT-363

PNP



600mA

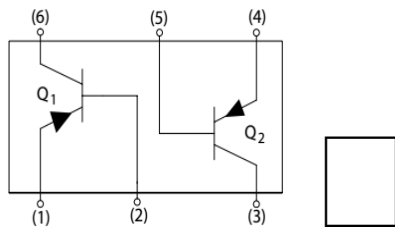

4 5

&


!"#\$%&



&									

! 5


! "#\$%&



% % ' ()




! "#\$%&



% % ' ()

&




&

! "\$ % &



% % ' ()

& * & : ! ? . = @ & N = / < 1 B 2 < . 3 = / &

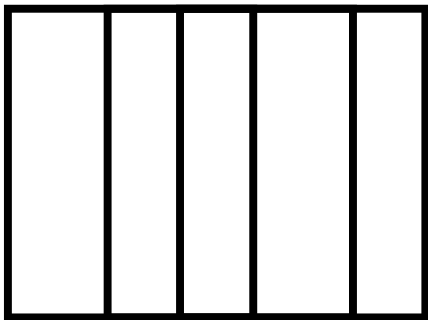

● “ 1 ”

2F



***:



● “ 1 ” Pin


2F

***:

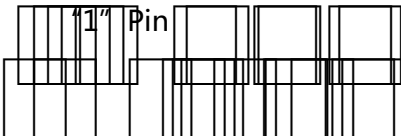





!"#\$%&




% ' ())

H K & * & & Temperature Profile for IR Reflow Soldering(Pb-Free)

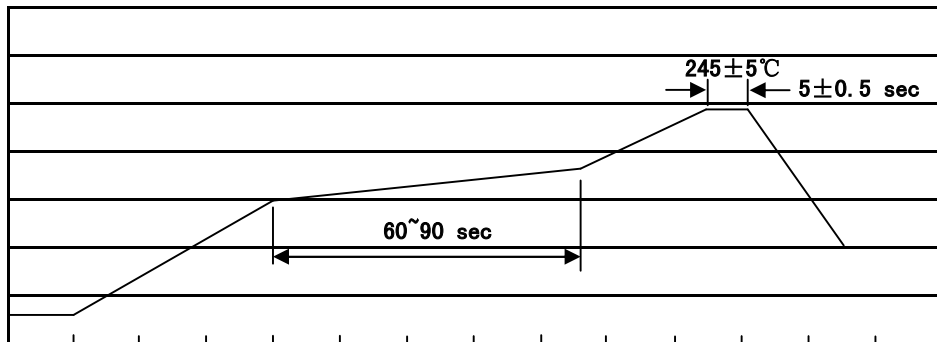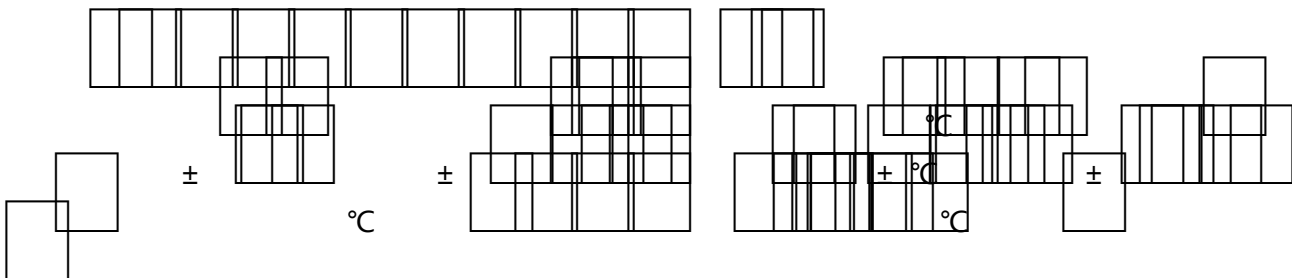

& & * & & + , / . / < : = 2 , & < 3 & ' 3 9 0 , 1 . = @ & (, : < & , / < & 8 3 = 0 . < . 3 = / &

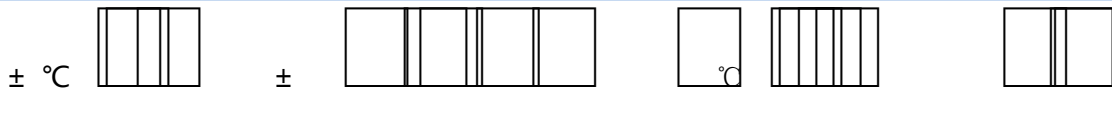

& & * & & D . 2 ? : @ . = @ & ' D) 8 0 &

00

封装形式	包装数量	包装尺寸	盒	箱
			"	

& & * & & P 3 < . 2 , / &



5 5