

/ Descriptions

WR0<5 M M E QSQ æ M ç s ll 1 Silicon NPN transistor in a TO-92 Plastic Package.

/ Features

ã я æ/ т = я u H/ ð ð ll ж, ð k H/ л PSVD<5J Ы ´ ñ f ß


High voltage low saturation, low collector output capacitance, complementary pair with MPSA92G.HF Product.

/ Applications

æ æ æ ð я í ð ð

High voltage control circuit.

/ Equivalent Circuit



/ Pinning



PIN1 χ Collector PIN 2 χ Base PIN 3 χ Emitter

/ hFE Classifications & Marking

ð m ç ð " See Marking Instructions.


/ Absolute Maximum Ratings(Ta=25)

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	300	V
Collector to Emitter Voltage	V_{CEO}	300	V
Emitter to Base Voltage	V_{EBO}	6.0	V
Collector Current - Continuous	I_C	500	mA
Collector Power Dissipation	P_C	625	mW
Collector Power Dissipation	$P_C(T_c=25^\circ C)$	1.5	W
Junction Temperature	T_j	150	
Storage Temperature Range	T_{stg}	-55 ~ 150	

/ Electrical Characteristics(Ta=25)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector to Base Breakdown Voltage	V_{CBO}	$I_C=100\mu A$ $I_E=0$	300			V
Collector to Emitter Breakdown Voltage	V_{CEO}	$I_C=1.0mA$ $I_B=0$	300			V
Emitter to Base Breakdown Voltage	V_{EBO}	$I_E=100\mu A$ $I_C=0$	6.0			V
Collector Cut-Off Current	I_{CBO}	$V_{CB}=200V$ $I_E=0$			0.1	A
Emitter Cut-Off Current	I_{EBO}	$V_{EB}=6.0V$ $I_C=0$			0.1	A
DC Current Gain	$h_{FE(1)}$	$V_{CE}=10V$ $I_C=10mA$	40			
	$h_{FE(2)}$	$V_{CE}=10V$ $I_C=30mA$	40			
	$h_{FE(3)}$	$V_{CE}=10V$ $I_C=1.0mA$	25			
Collector to Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=20mA$ $I_B=2.0mA$			0.5	V
Base to Emitter Saturation Voltage	$V_{BE(sat)}$	$I_C=20mA$ $I_B=2.0mA$			0.9	V
Transition Frequency	f_T	$V_{CE}=20V$ $f=100MHz$ $I_C=10mA$	50			MHz
Collector Output Capacitance	C_{ob}	$V_{CB}=20V$ $f=1.0MHz$ $I_E=0$			3.0	pF


/ Electrical Characteristic Curve

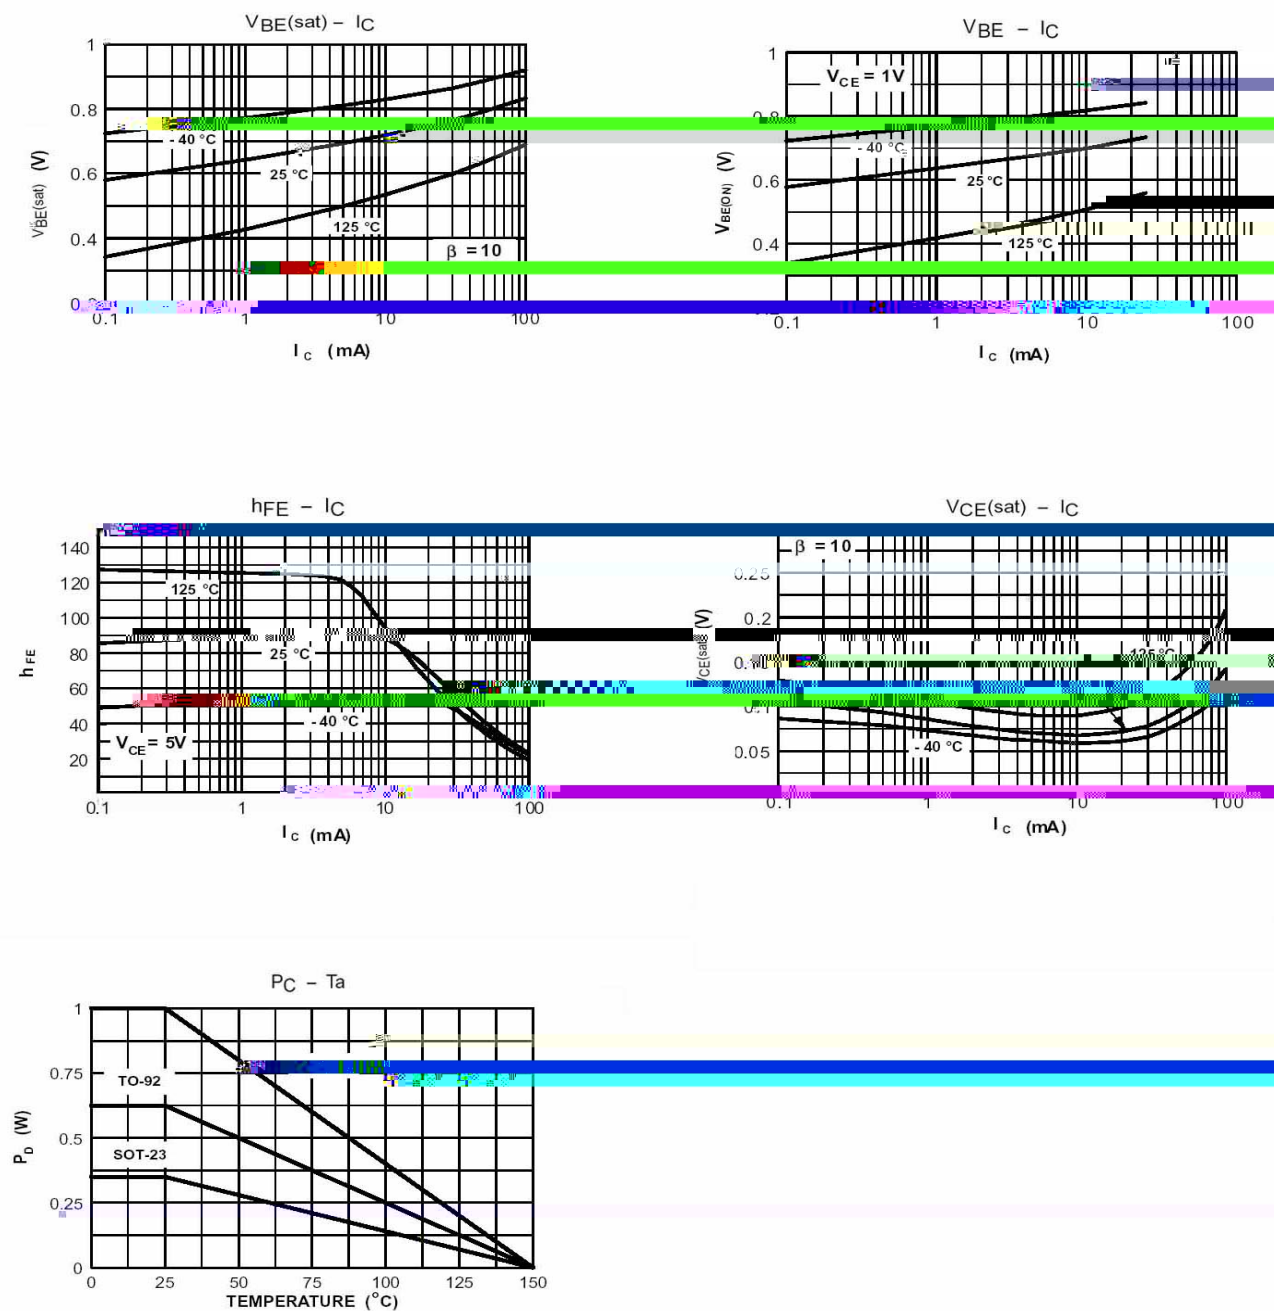


/ Package Dimensions

TO-92

Unit: mm

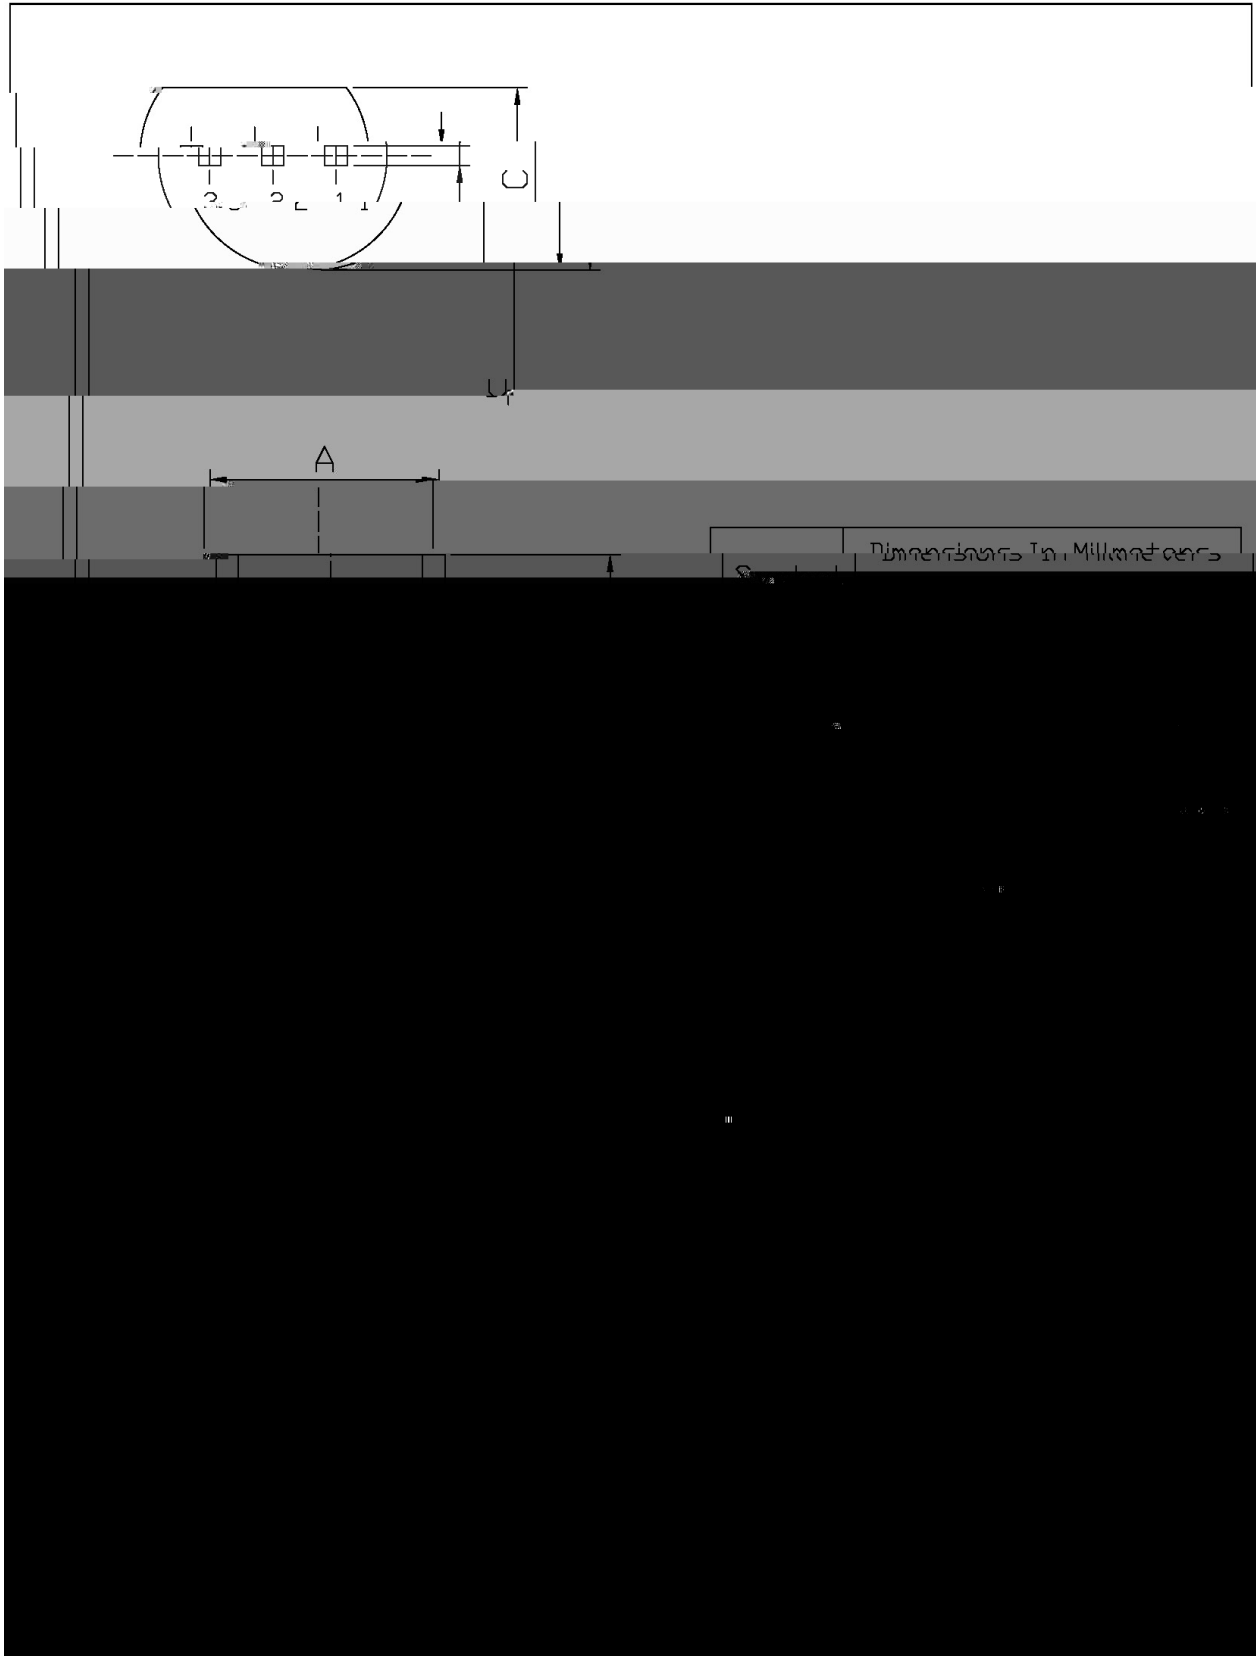

/ Marking Instructions

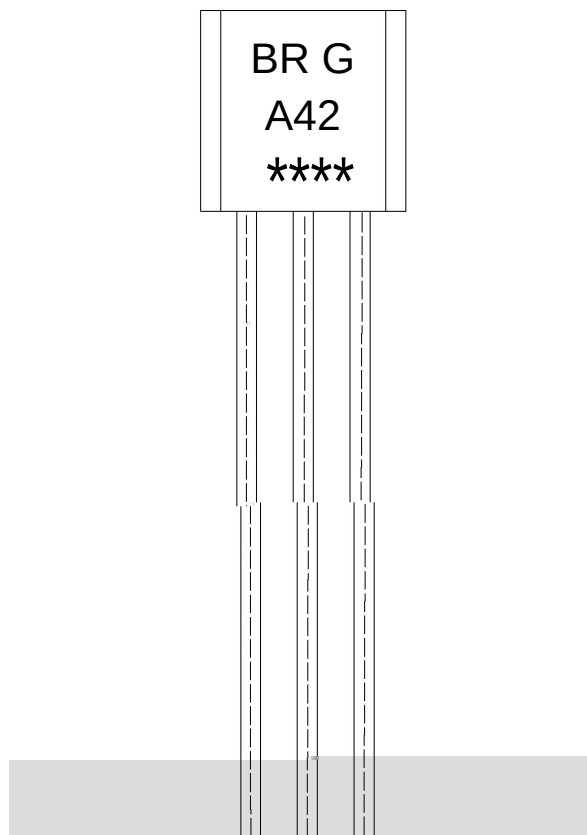

б " X

EU:

м з " Г

D75 X

м з " Г

J:

м н ф β Г

---- X

м л ф њ " Г л ф њ " ψ ρ

Note:

BR:

Company Code.

A42:

Product Type.

G:

Halogen Free Product

****:

Lot No. Code,code change with Lot No.

() / Temperature Profile for Dip Soldering(Pb-Free)



- 说明

 1. 预加热: 25~150 °C, 时间: 60~90sec;
 2. 峰值温度: 255 °C, 持续时间: 5 °C 0.5sec;
 3. 冷却速度: 2~10 °C /sec.
- Note:

 - 1.Preheating:25~150 °C , Time:60~90sec.
 - 2.Peak Temp.:255 °C , Duration:5 °C 0.5sec.
 3. Cooling Speed: 2~10 °C /sec.

/ Resistance to Soldering Heat Test Conditions

环境温度: 270 °C ± 5 加热时间: 10 ± 1 sec. Temp: 270 ± 5 Time: 10 ± 1 sec

/ Packaging SPEC.

包装形式 / BULK

Package Type 封装形式	Units 包装数量	Dimension 包装尺寸 (unit: mm3)
----------------------	------------	----------------------------