

/ Descriptions

TO-92	PNP	Silicon PNP transistor in a TO-92 Plastic Package.
-------	-----	--


/ Features

High voltage low saturation, low collector output capacitance, complementary pair with MPSA42.

/ Applications

High voltage control circuit.

/ Equivalent Circuit



/ Pinning



PIN1	Collector	PIN 2	Base	PIN 3	Emitter
------	-----------	-------	------	-------	---------


/ hFE Classifications & Marking

See Marking Instructions.

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	-300	V
Collector to Emitter Voltage	V_{CEO}	-300	V
Emitter to Base Voltage	V_{EBO}	-5.0	V
Collector Current - Continuous	I_C	-500	mA
Base Current - Continuous	I_B	-30	mA
Collector Power Dissipation	P_C	625	mW
Collector Power Dissipation	$P_c(T_c=25^\circ C)$	1.5	W
Junction Temperature	T_j	150	
	T_{stg}	-55 150	

Test Conditions	Min	Typ	Max	Unit
$I_E=0$	-300			V
$I_B=0$	-300			V
$I_C=0$	-5.0			V
$I_E=0$			-0.25	μA
$I_C=0$			-0.1	μA
$I_C=-10mA$	40			
$I_C=-30mA$	25			
$I_C=-1.0mA$	25			


/ Electrical Characteristic Curve

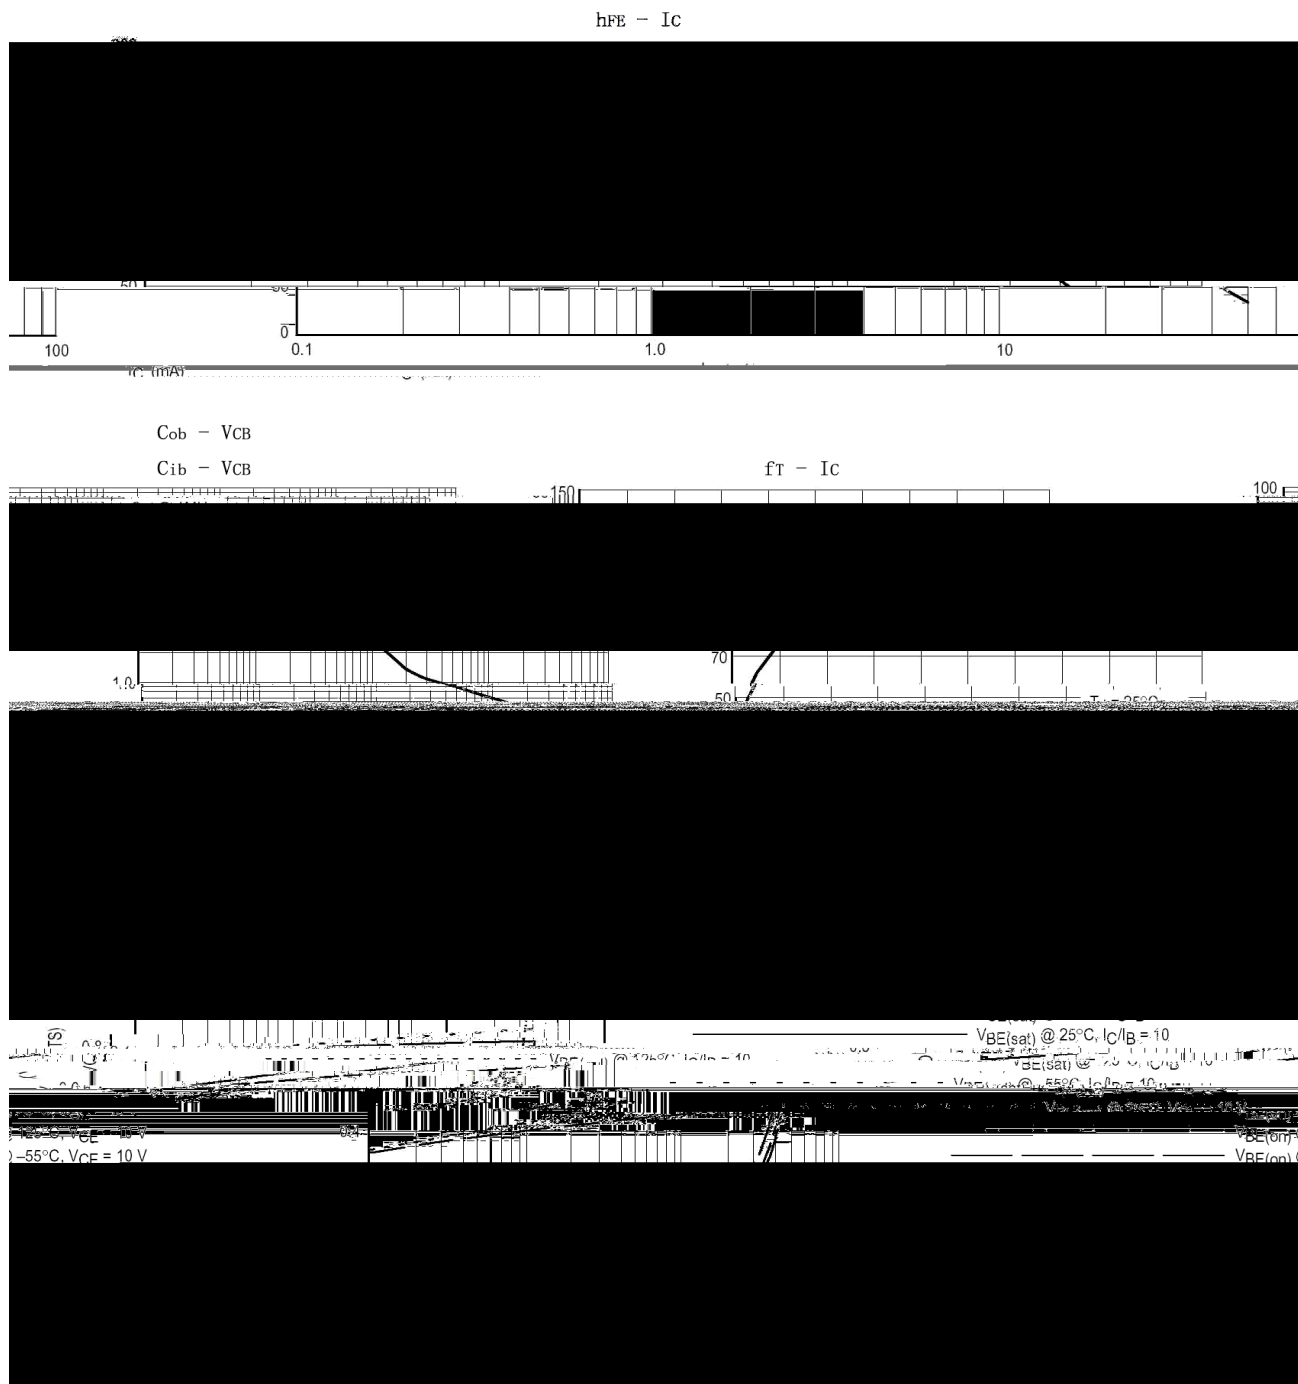


/ Package Dimensions

TO-92

Unit: mm

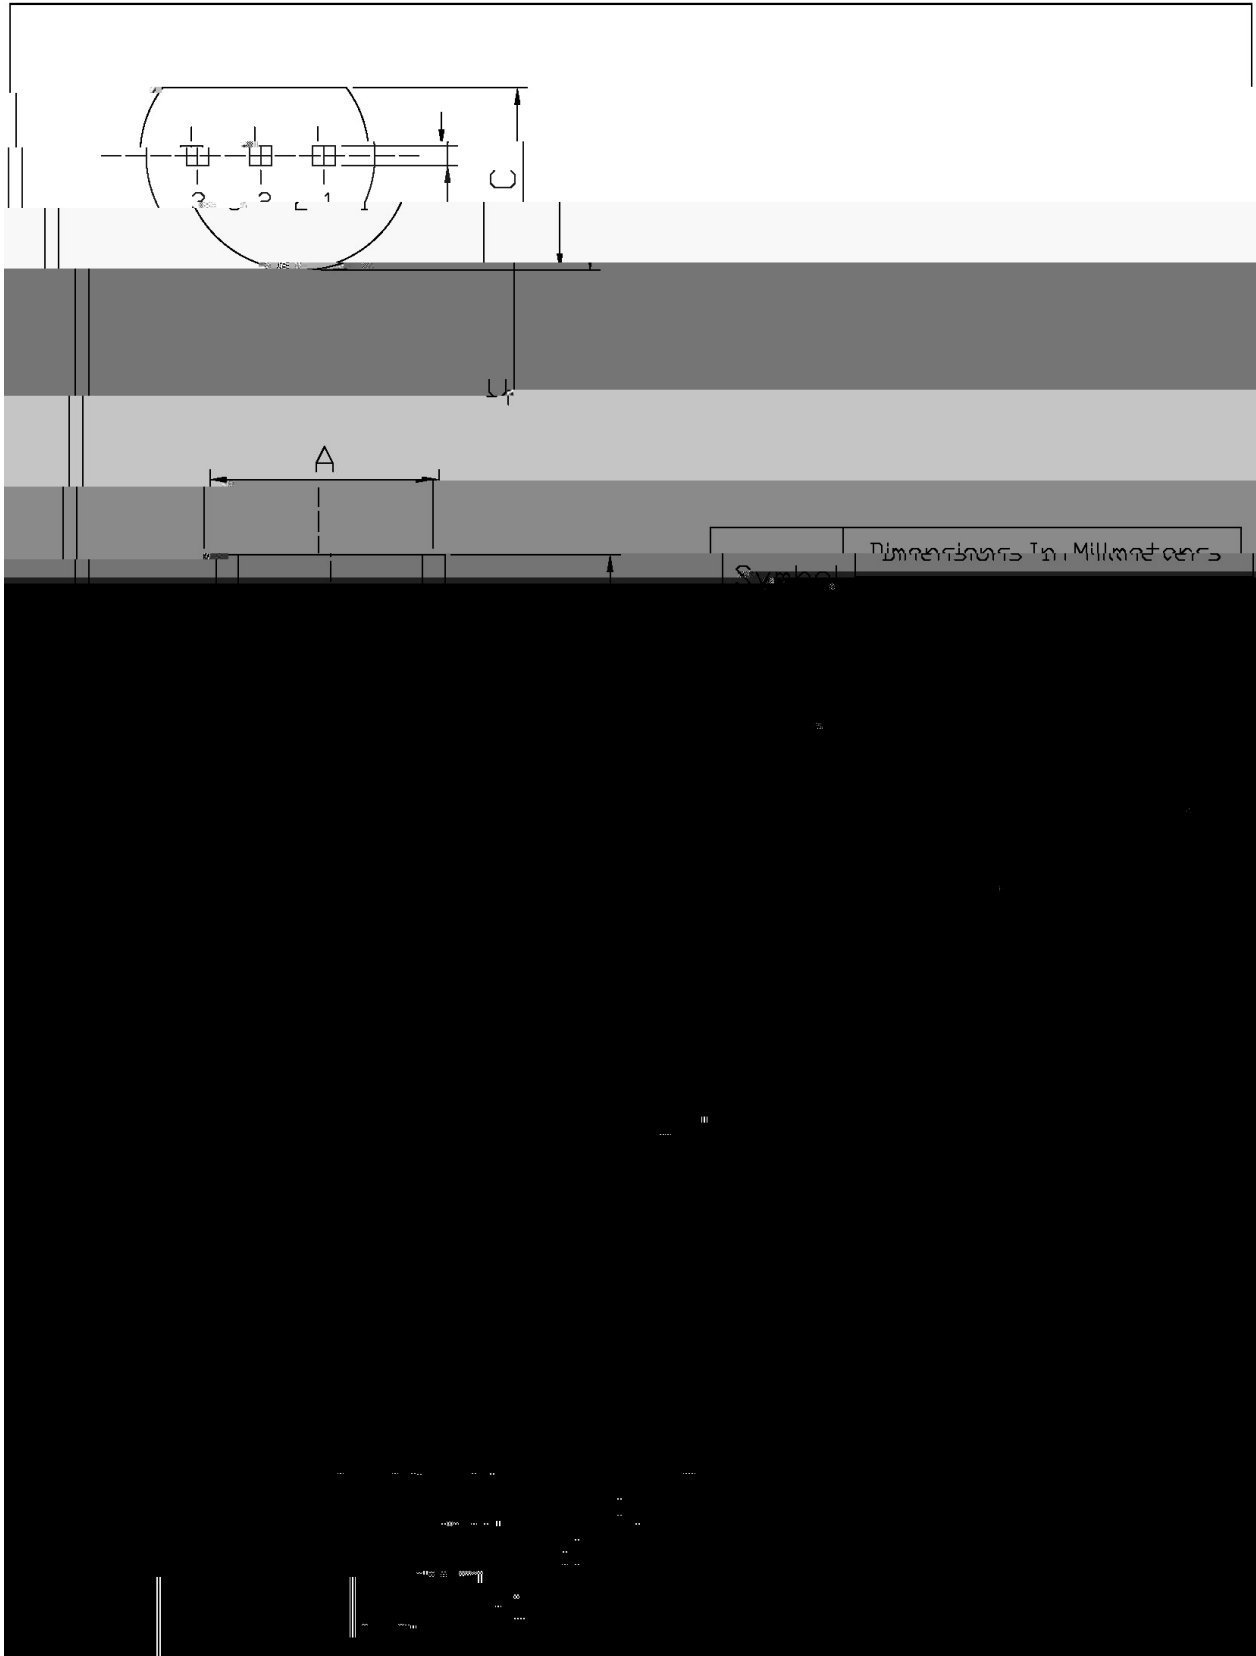

/ Marking Instructions

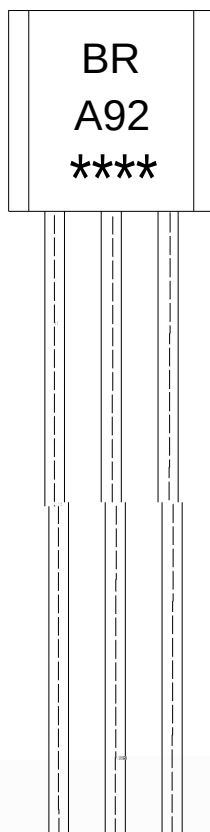

BR:

A92

Note:

BR: Company Code.

A92: Product Type.

****: Lot No. Code,code change with Lot No.

