! / Revised record

A	2019-7-25	ALL	SMC-RS5AC_RS5MC		
B	2021-2-9	7			

RS5AC~RS5MC
Rev.B Feb.-R

q0 SC 38299072.m.56 382 6 70 .1

Parameter	Symbol	Rating							Unit
		RS5AC	RS5BC	RS5DC	RS5GC	RS5JC	RS5KC	RS5MC	

C

6 I'

5

K

5

Symbo

C

0 8 9 = > ? / Electrical Characteristic Curve

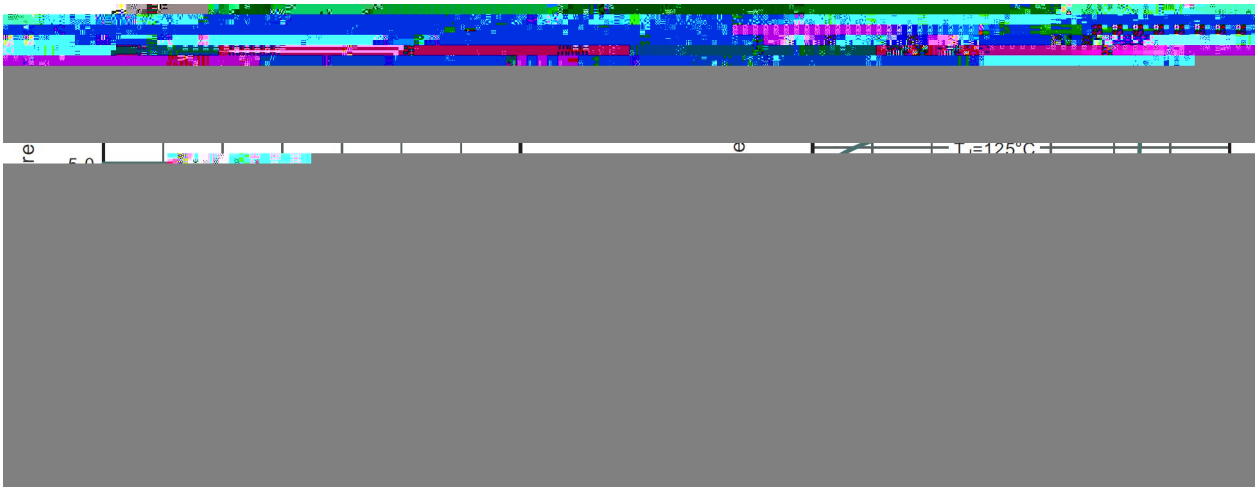

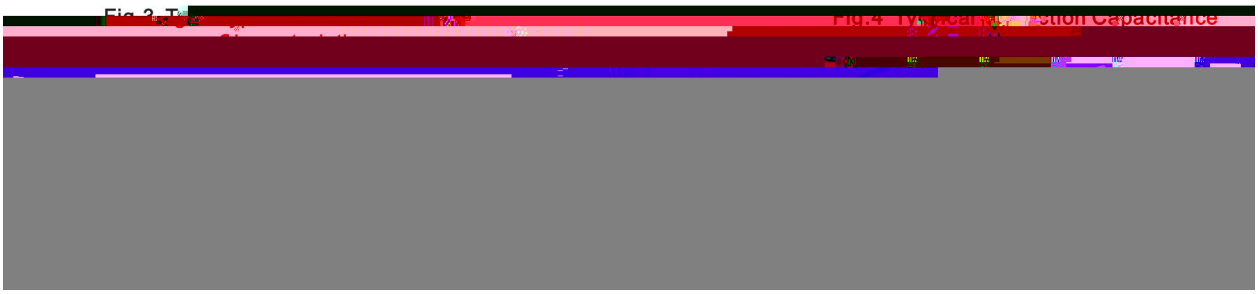

@ A B C ? / Package Dimensions

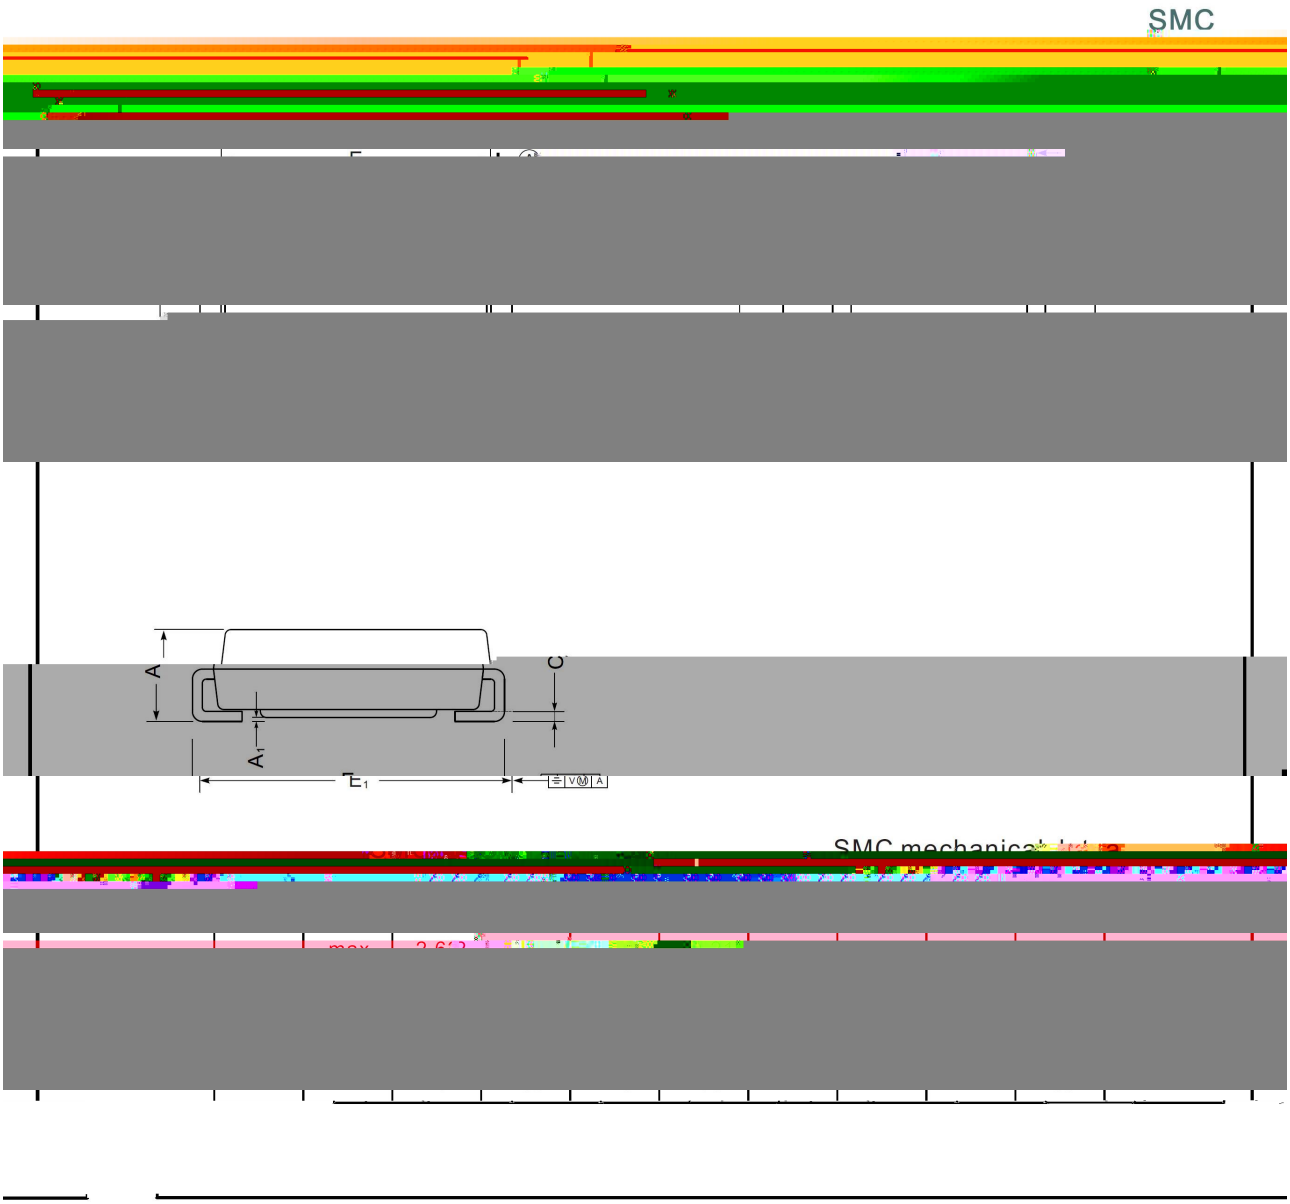

" # D E / Marking Instructions

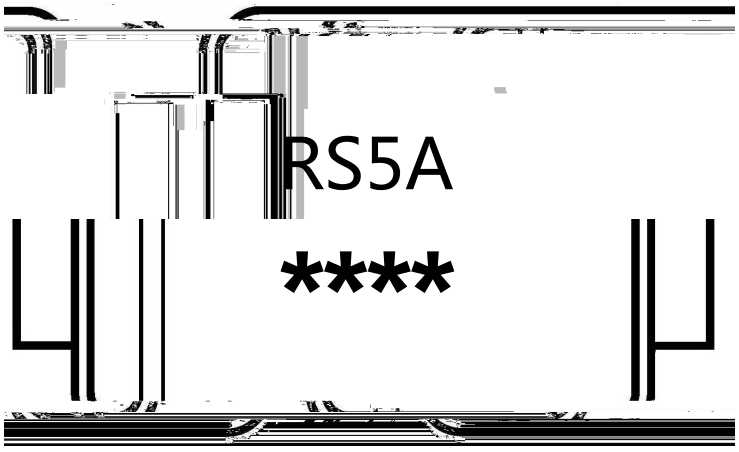

RS5A

**** 1 **F** 3 **F**

Note:

RS5A Product Type Code

**** Lot No. Code The 1st **F** means:YM Code The last 3 **F**means:little Lot No Code

H I J K L = > ? (M N) / OPQRPSTUVSPGWSXYZ[PGYXSG\]G]PY[X^G_X[`PSZabcWdefSPPg

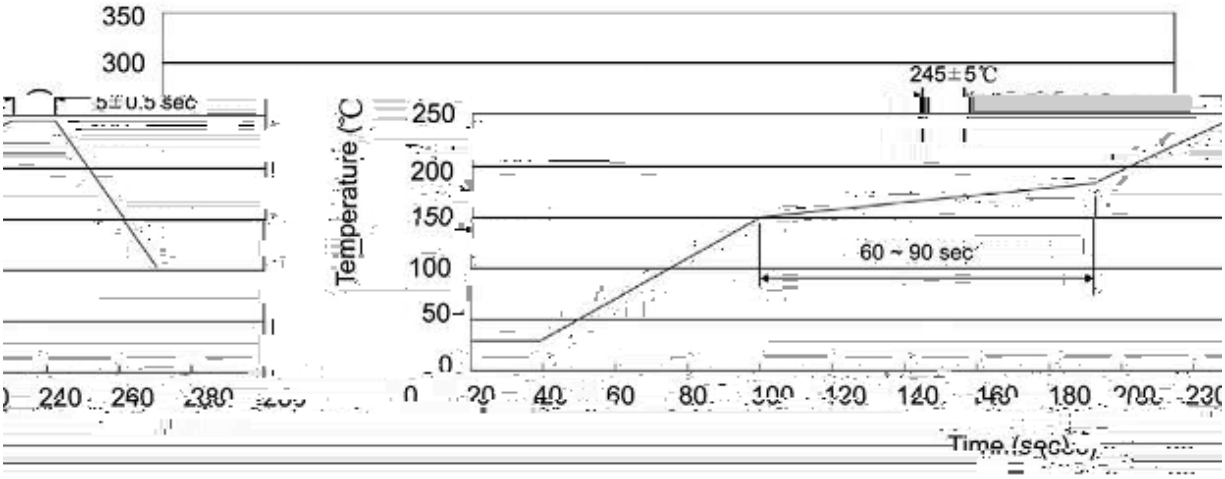

Note:

1 150 180 60 90sec;

1.Preheating:150~180 , Time:60~90sec.

2 245 5 5 0.5sec;

2.Peak Temp.:245 5 , Duration:5 0.5sec.

3 2 10 /sec.

3. Cooling Speed: 2~10 /sec.

h J i j k l m n / Resistance to Soldering Heat Test Conditions

260 5 10 1 sec. Temp.:260 5 Time:10 1 sec

o p q r / Packaging SPEC.

/ REEL

Package Type !	Units " # $					Dimension " % & (unit ' mm^3)		
	Uni s/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Uni s/Inner Box 只/盒	Inner Boxes/Ou er Box 盒/箱	Uni s/Ou er Box 只/箱	Reel	Inner Box (	Ou er Box)
SMC	3000	2	6000	6	36000	13″ ×16	337X337X49	380X335X366

s * D E / Notices