**! / Revised record**

| | | | | | |
|---|---|---|---|---|---|
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

**S3AC~S3MC**
Rev.B Feb.-2021

## 0 8 9 = > ? / Electrical Characteristic Curve

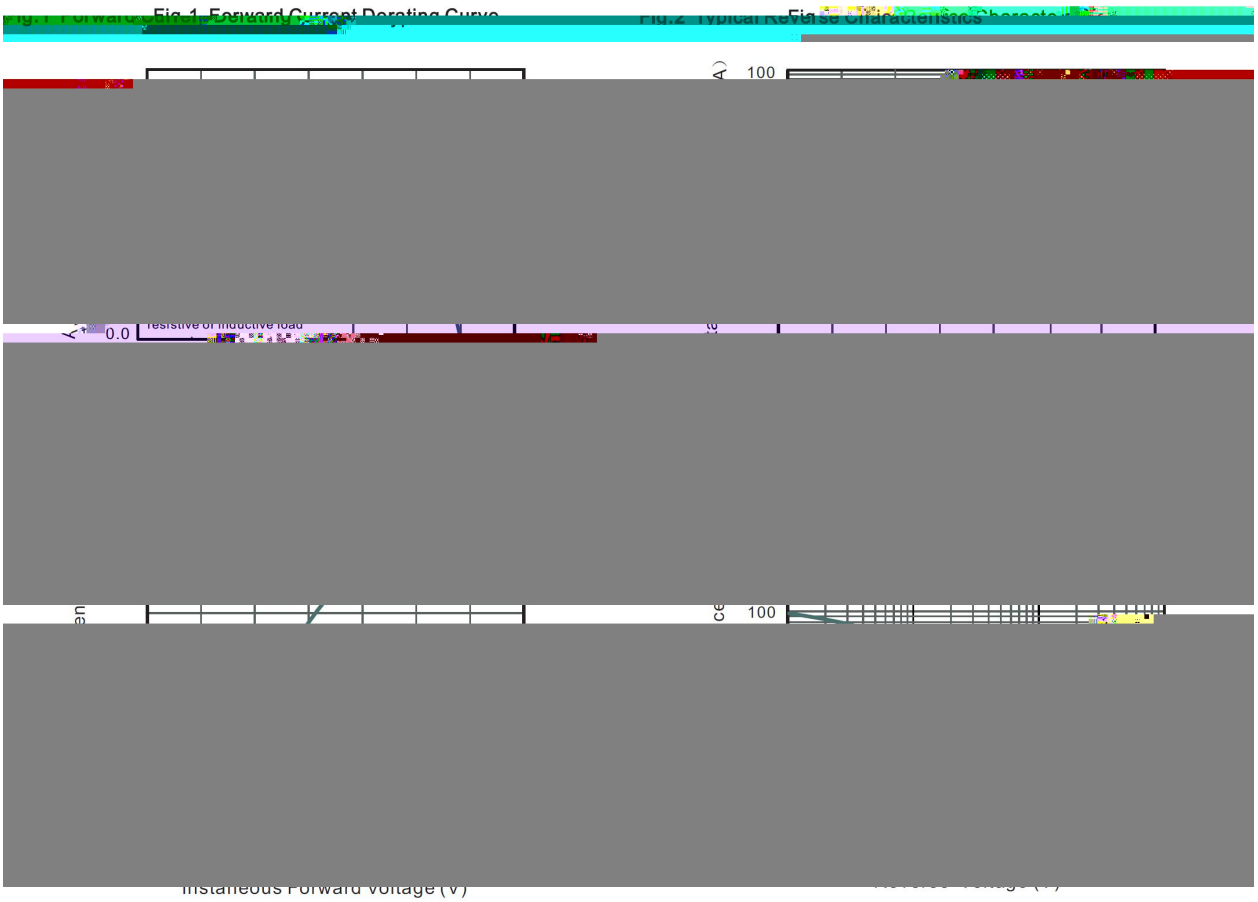


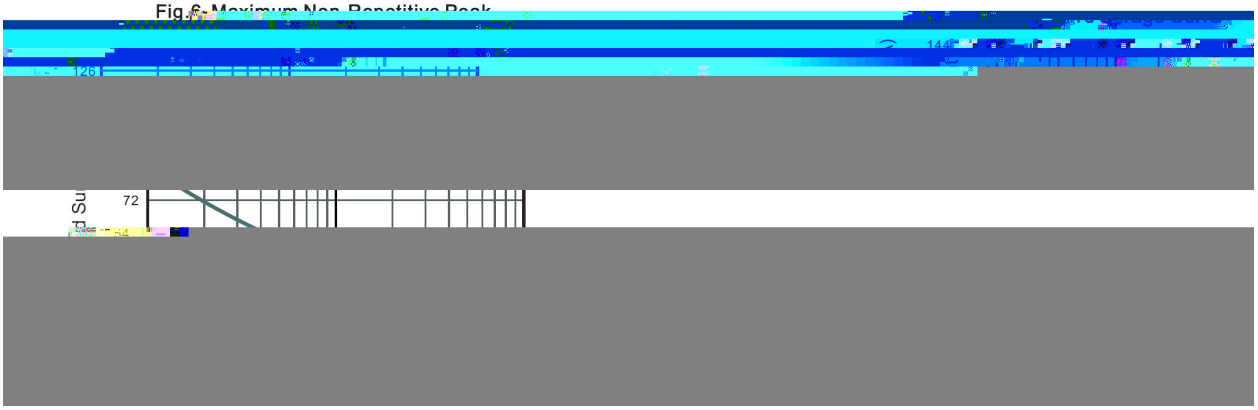

**S3AC~S3MC**
Rev.B Feb

## H I J K L = > ? (M N) / OPQRPSTUVSPGWSXYZ[PGYXSG\]G]PY[X^G_X[`PSZabcWdefSPPg

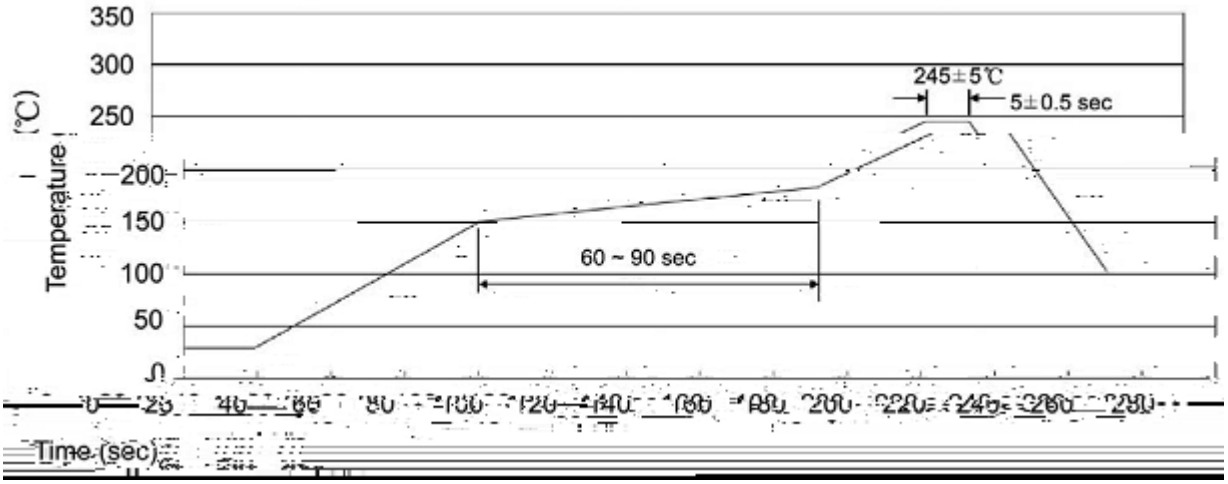


| | | | | | | |
|---|---|---|---|---|---|---|
| | | | | | | Note: |
| 1 | | 25 | 150 | | 60 90sec; | 1.Preheating:25~150℃, Time:60~90sec. |
| 2 | | 245±5 | | | 5±0.5sec; | 2.Peak Temp.:245±5℃, Duration:5±0.5sec. |
| 3 | | | | 2 | 10℃/sec. | 3. Cooling Speed: 2~10℃/sec. |

## h J i j k l m n / Resistance to Soldering Heat Test Conditions

| | | | |
|---|---|---|---|
| 260±5℃ | 10±1 sec. | Temp.:260±5℃ | Time:10±1 sec |

## o p q r / Packaging SPEC.

/ REEL

| Package Type 封装形式 | Units 包装数量 | | | | | Dimension 包装尺寸 (unit: $mm^3$) | | |
|---|---|---|---|---|---|---|---|---|
| | Units/Reel 只/卷盘 | Reels/Inner Box 卷盘/盒 | Units/Inner Box 只/盒 | Inner Boxes/Outer Box 盒/箱 | Units/Outer Box 只/箱 | Reel | Inner Box 盒 | Outer Box 箱 |