

U09 M M E = g ~ || 1

Rs PRV ⚡ ᵀᶜ Hᵗ ᵇ я ∪ । H । Ḃ ˆ ϕ ' ظ Φ Ъ □ J □ v533 † । p ⁂ ᱏ ᱥ ᱦ ᱧ ᱨ ᱩ ᱪ ᱫ ᱬ ᱭ ᱮ ᱯ ᱰ ᱴ ᱵ ᱶ ᱷ ᱸ ᱹ ᱺ ᱻ ᱼ ᱽ ᱾ ᱿ ᱺ ᱽ ᱾

Ä HVG ᱢ ᱣ ᱤ ᱥ °63NY

 $\leq$ [illegible]


x

x

ՏՄՂԵ՛”

Ƶ "Ω	Ƴ N	"Ω Ö	D H
------	-----	------	-----


/ Package Dimensions

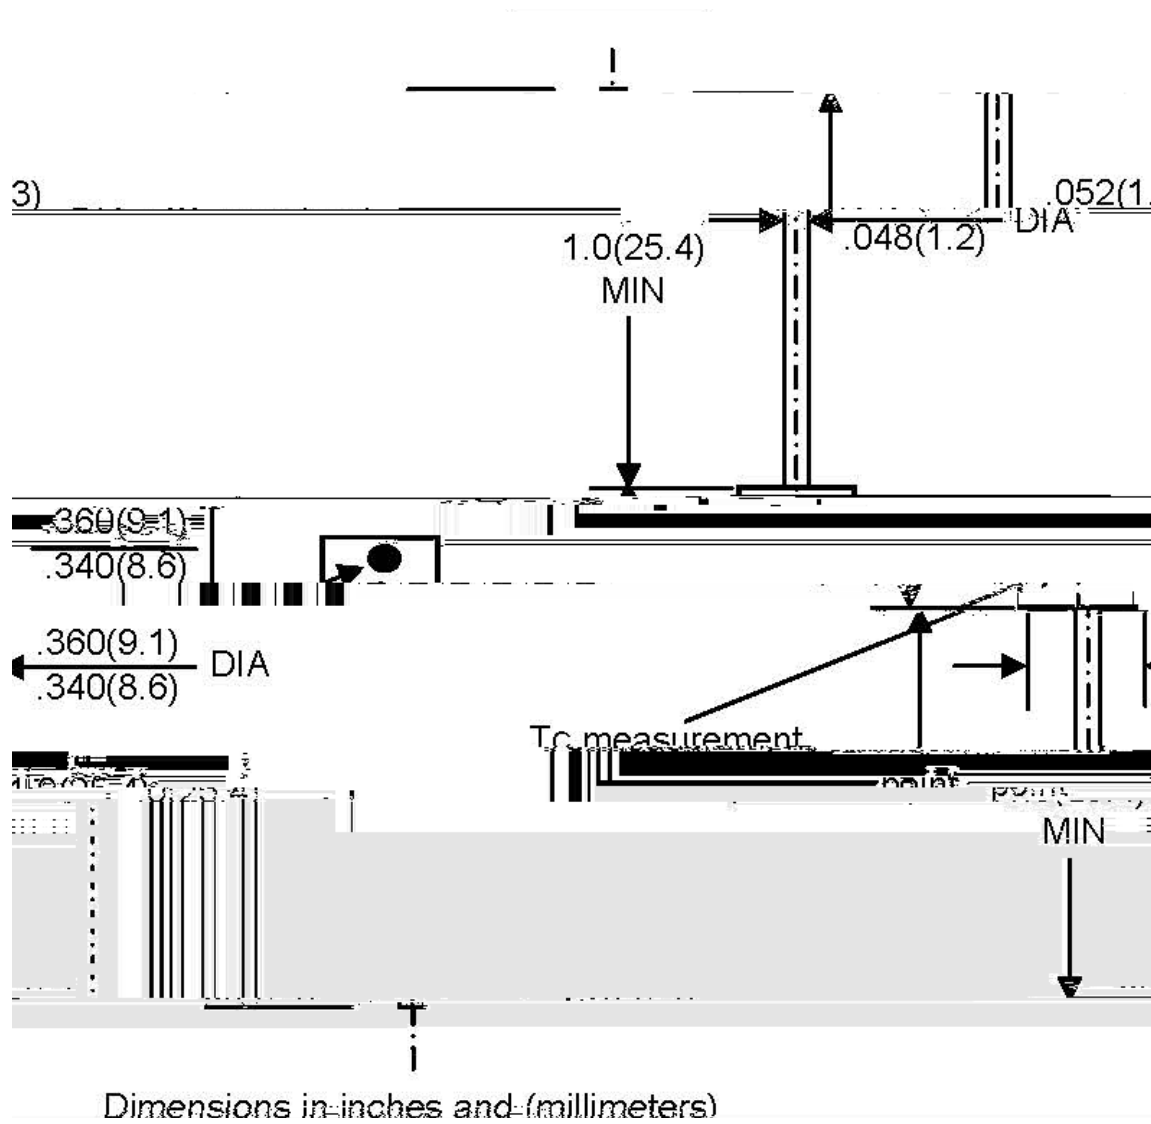

A diagram of a vertical rod with a central rectangular block labeled "15T45". The rod is represented by two horizontal lines, one above and one below the central block, extending to the left and right edges of the diagram. The central block is a rectangle with a black border and a white fill, containing the text "15T45" in black, centered vertically and horizontally.

48W78 χ

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

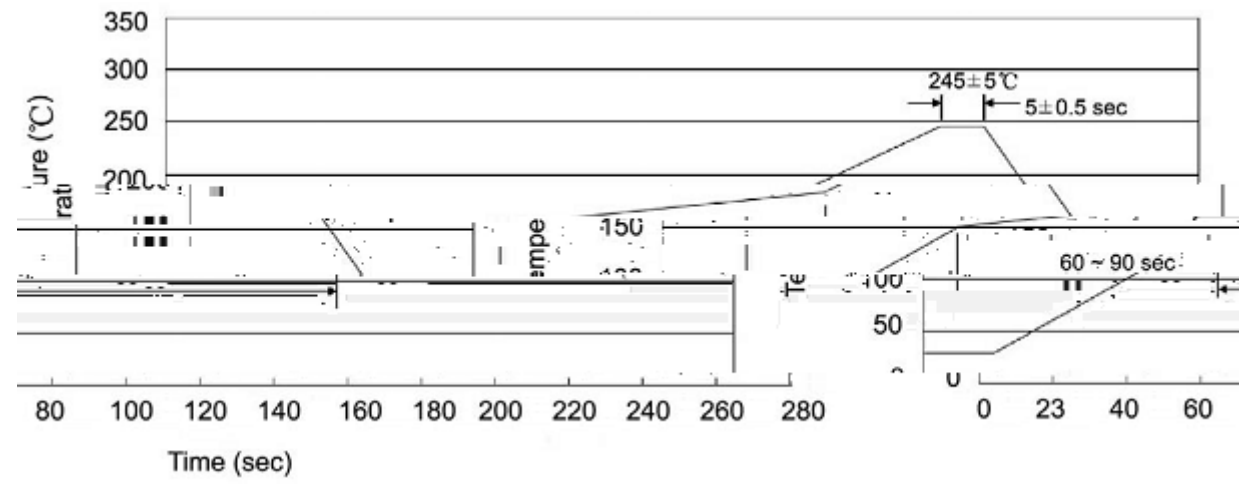

温度曲线 X
时间 t