

SS22B~SS220B

Rev.C Sep.-2020



DATA SHEET

A	2017-12				
B	2020-9-7	3	Fig 1		

Tj=-55~+125
-55~+150 SS28B
Vf=0.7V 0.85V SS28B
IFSM=55A 45A

0.

SS22B~SS220B
Rev.C Sep




SS22B~SS220B

Rev.C Sep

SS22B~SS220B

Rev.C Sep.-2020

DATA SHEET

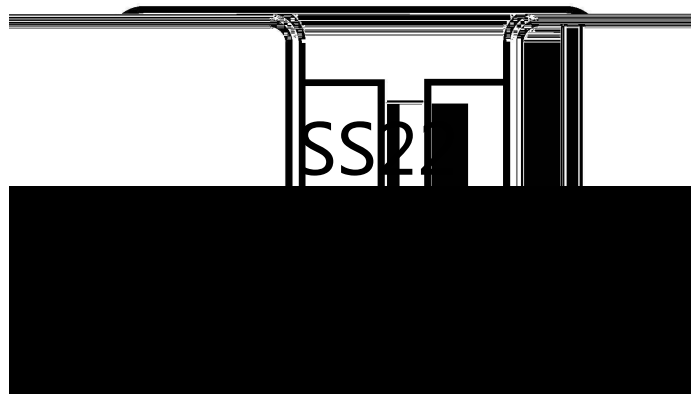/ **Marking Instructions**

SS22

1

3


Note:

SS22

Product Type Code

Lot No. Code The 1st means:YM Code The last 3 means:little Lot No
Code

() /

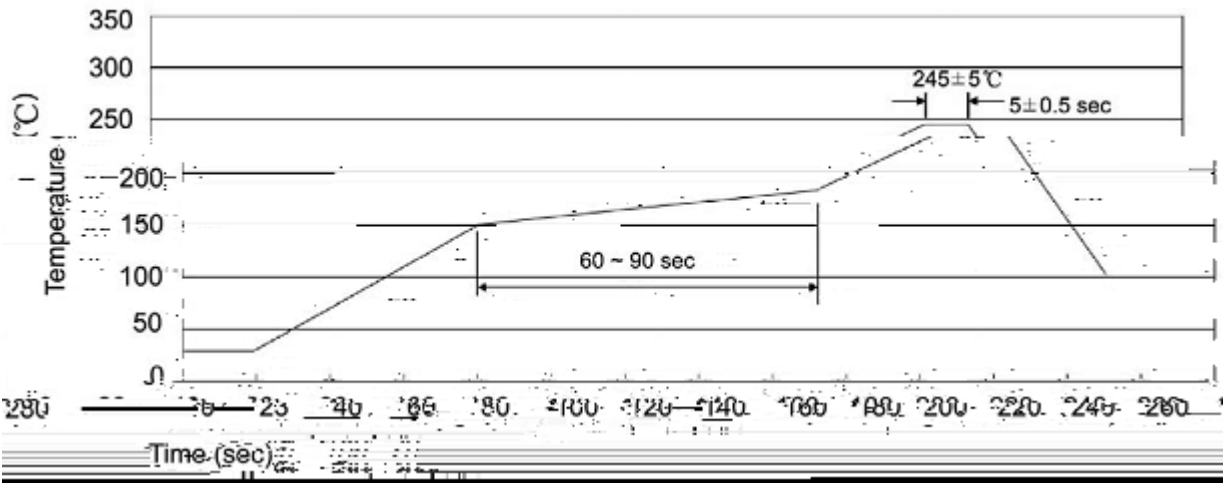

Note:

- | | | | | | |
|---|-------|-----|-----------|---|--------------------------------------|
| 1 | 25 | 150 | 60 | 90sec; | 1.Preheating:25~150 , Time:60~90sec. |
| 2 | 245±5 | | 5±0.5sec; | 2.Peak Temp.:245±5 , Duration:5±0.5sec. | |
| 3 | | 2 | 10 | /sec. | 3. Cooling Speed: 2~10 /sec. |

/ Resistance to Soldering Heat Test Conditions

260±5 10±1 sec. T q m T_{0y} /