

Rev. A Nov.-2019



Surface Mount Schottky Barrier Rectifiers, Reverse Voltage 60V, Forward Current: 2.0A ,SMB package.

Low power loss, High efficiency, High forward surge current capability, For surface mounted applications. HF product.



General purpose.



Rev. A Nov.-2019




0 8 9 = > ?

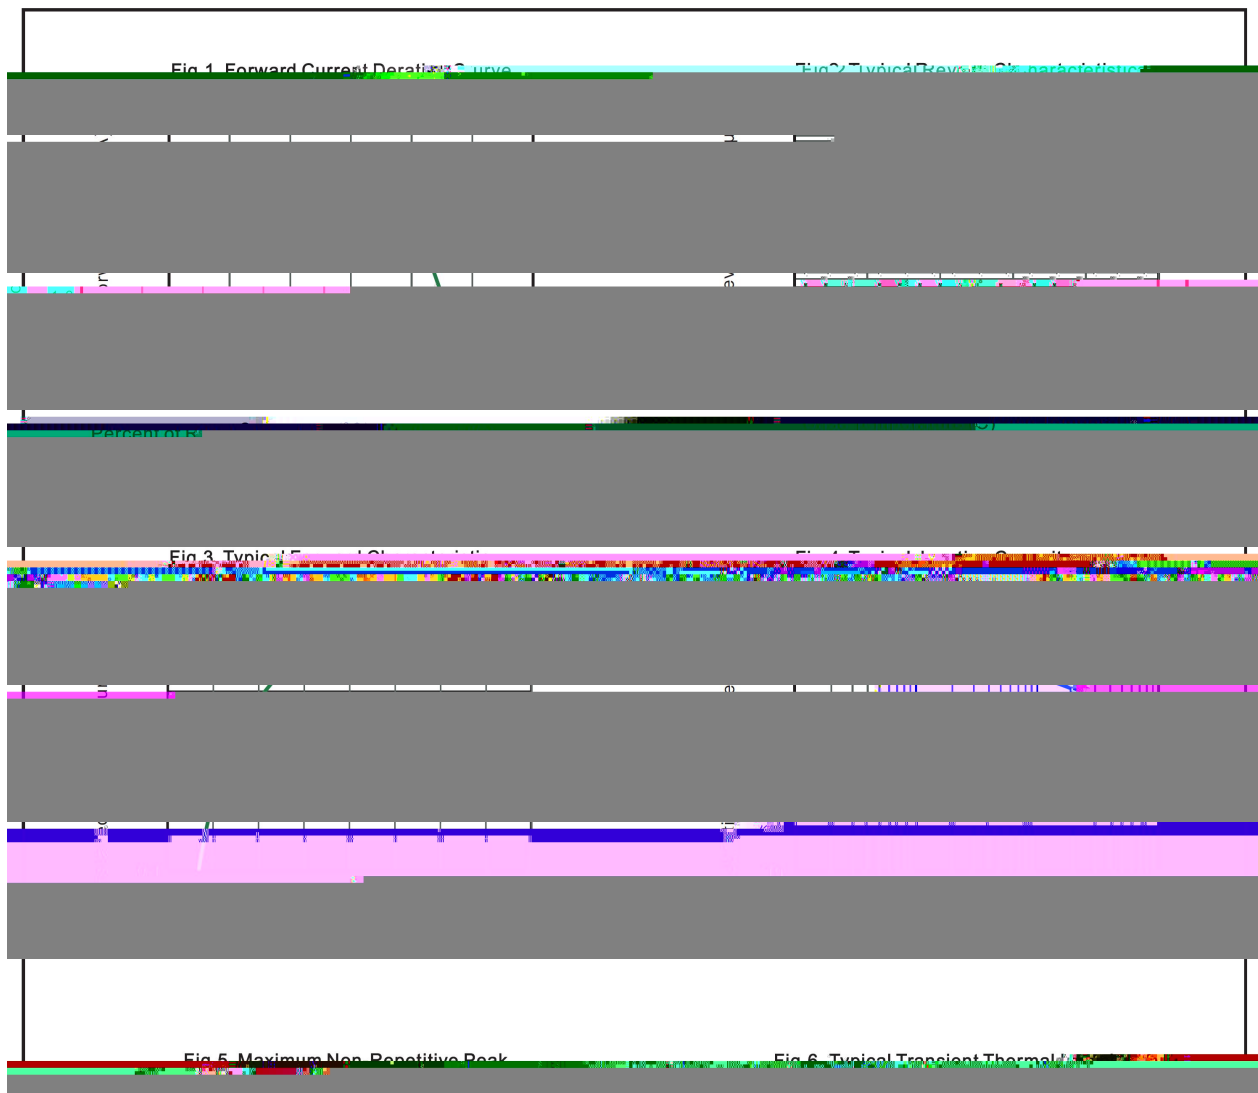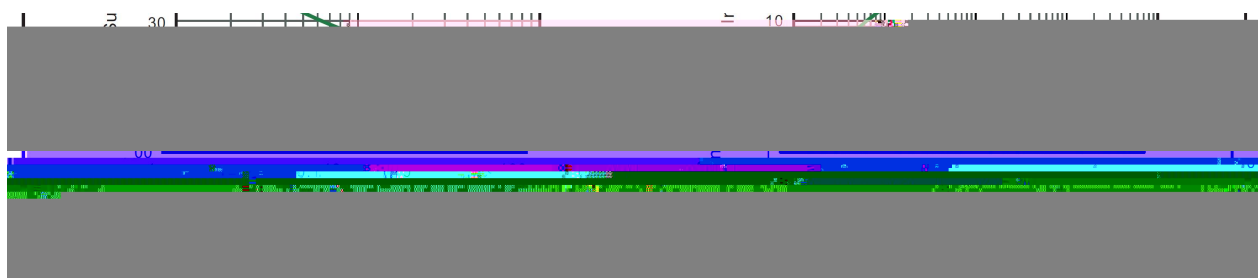




@ABC?

SMB

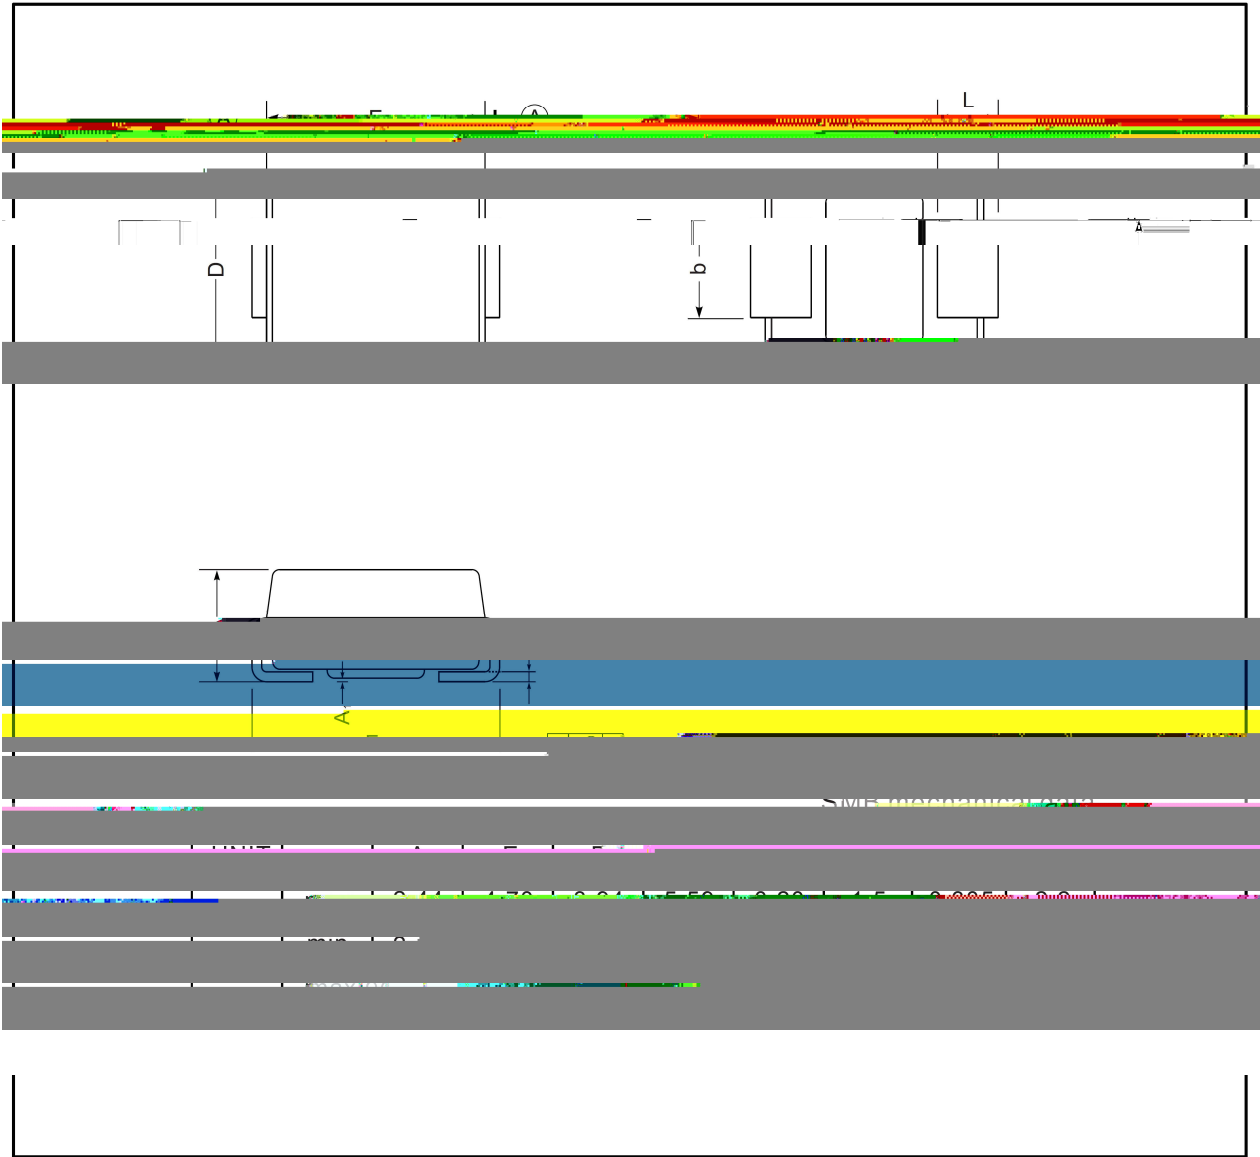



" # D E

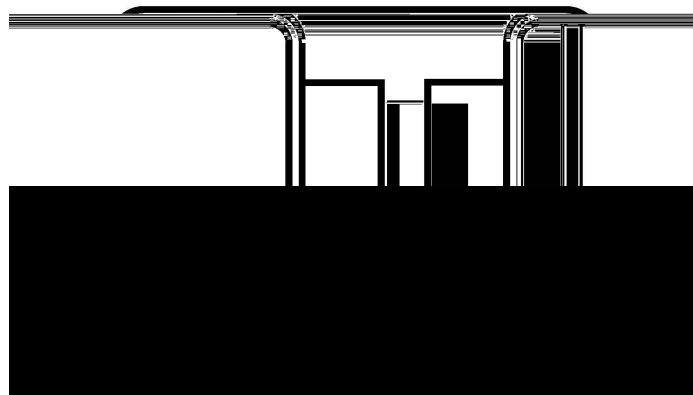


SSL26

1 F



H I J K L = > ? M N O P Q R P S T U V S P G W S X Y Z [P G Y X S G \] G] P Y [X ^ G _ X [` P S Z a b c W d e f S P P g

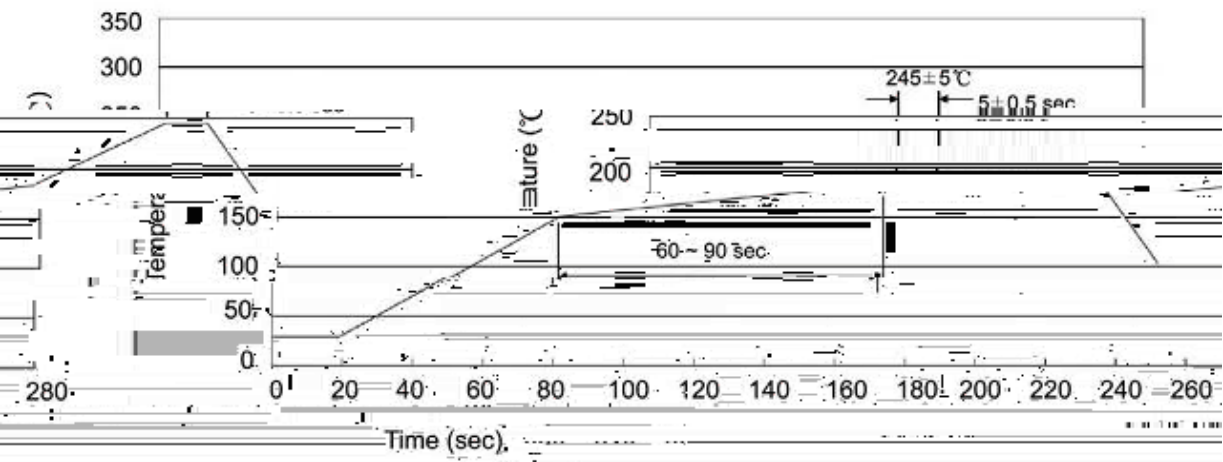

Note:

- | | | | | | |
|---|-------|-----|-----------|--------|---|
| 1 | 150 | 180 | 60 | 90sec; | 1.Preheating:150~180 , Time:60~90sec. |
| 2 | 245±5 | | 5±0.5sec; | | 2.Peak Temp.:245±5 , Duration:5±0.5sec. |
| 3 | | 2 | 10 | /sec. | 3. Cooling Speed: 2~10 /sec. |

h J i j k l m n

260±5 10±1 sec. Temp.:260±5 Time:10±1 sec

o p q r

/ REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	3000 只/卷盘	5 卷盘/盒	15000 只/盒	5 盒/箱	75000 只/箱	7" ×11	185X180X105	390X385X205
SMB	3000	5	15000	5	75000	7" ×11	185X180X105	390X385X205

s * D E