


A	2020-6-3	ALL	SMA-S-SSL34-3A40V		



& ' '" (" " #* -0/,9:,17 -"

40V

3.0A

SMA

Surface Mount Schottky Barrier Rectifier, Reverse Voltage: 40V, Forward Current: 3.0A ,SMA thin package.

() '" (" " ; *5:</* -"


Low power loss, high efficiency, High forward surge current capability, For use in low voltage, high frequency inverters, and polarity protection applications,For surface mounted applications.Halogen free product.

"


* + '" (" " \$99=,05:,17 -"

General purpose.

, - . / 0 1 '" (" " '><, +5-*7:"?,/0<,:"




2 3 4 5 '" (" " @,77,78"

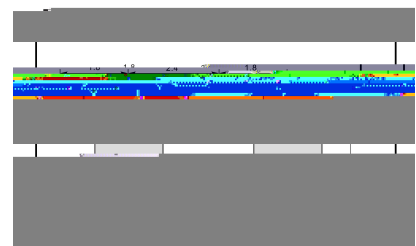

" # \$%" (" " 45/6,78

See Marking Instructions.




"

参数
Parameter


符号
Symbol


数值
Rating





" # D E " " (" 45/6,78"J7-:/<0:,17 - "

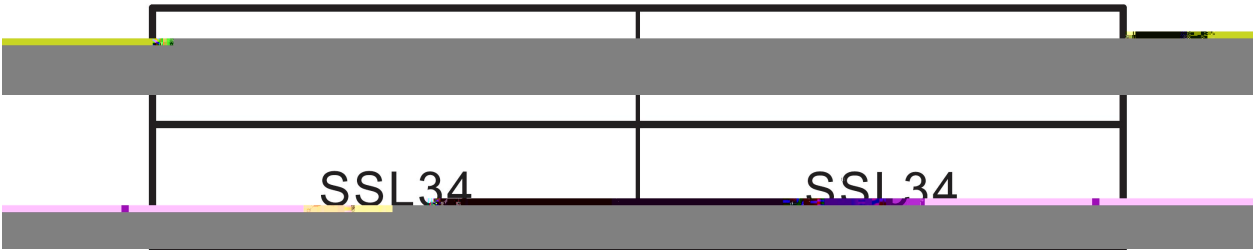
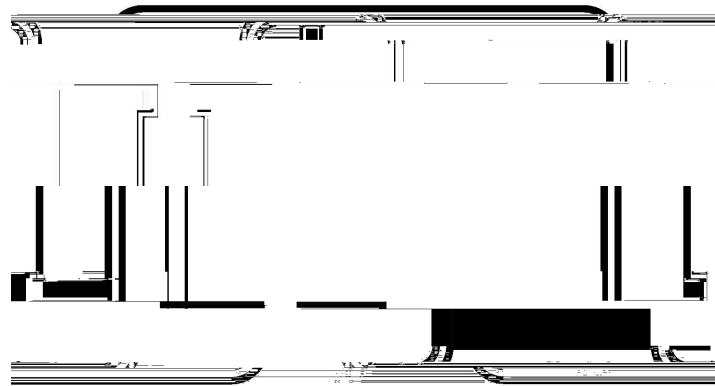
$$\begin{array}{c} \text{d} \\ \text{d} \\ \text{d} \\ \\ \text{d} \\ \\ \text{d} \\ \text{d} \\ \text{d} \\ \text{S d} \end{array}$$


LLL"

1 F

3 F

SSL34 Product Type Code

LLLL Lot No. Code The 1st F means:YM Code The last 3 F means:little Lot No

!"