

5 é / Descriptions

n μ É xRK Ô Â ... v 8 â ' k F g 9 y < k 3 g v y ' k 9 3 (/ xož
Surface Mount Schottky Barrier Rectifiers, Reverse Voltage y 40V,Forward Current: 3.0A ,SMB
package.

□ a / Features

z ô k ä | ä k ä 3 g ~ ... v k n μ É x k —)í D }ož
Low power loss, High efficiency, High forward surge current capability, For surface mounted
applications, HF Product.

Đ ÷ / Applications

%² " (ož
General purpose.

Ã W] Ô · / Equivalent Circuit




• Ô - æ / Pinning



PIN	DESCRIPTION
1	Cathode
2	Anode

The recommended mounting pad size

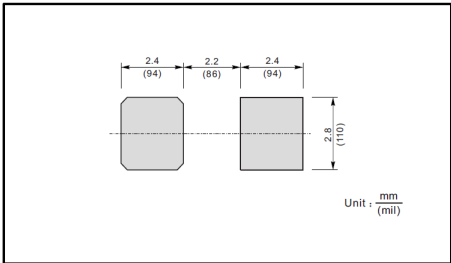


, M V / Marking

Type number	Marking
SSL34B	SSL34

Ô ? d • Ž ¢ / Electrical Characteristic Curve



Ø □ =) ☎ / Package Dimensions

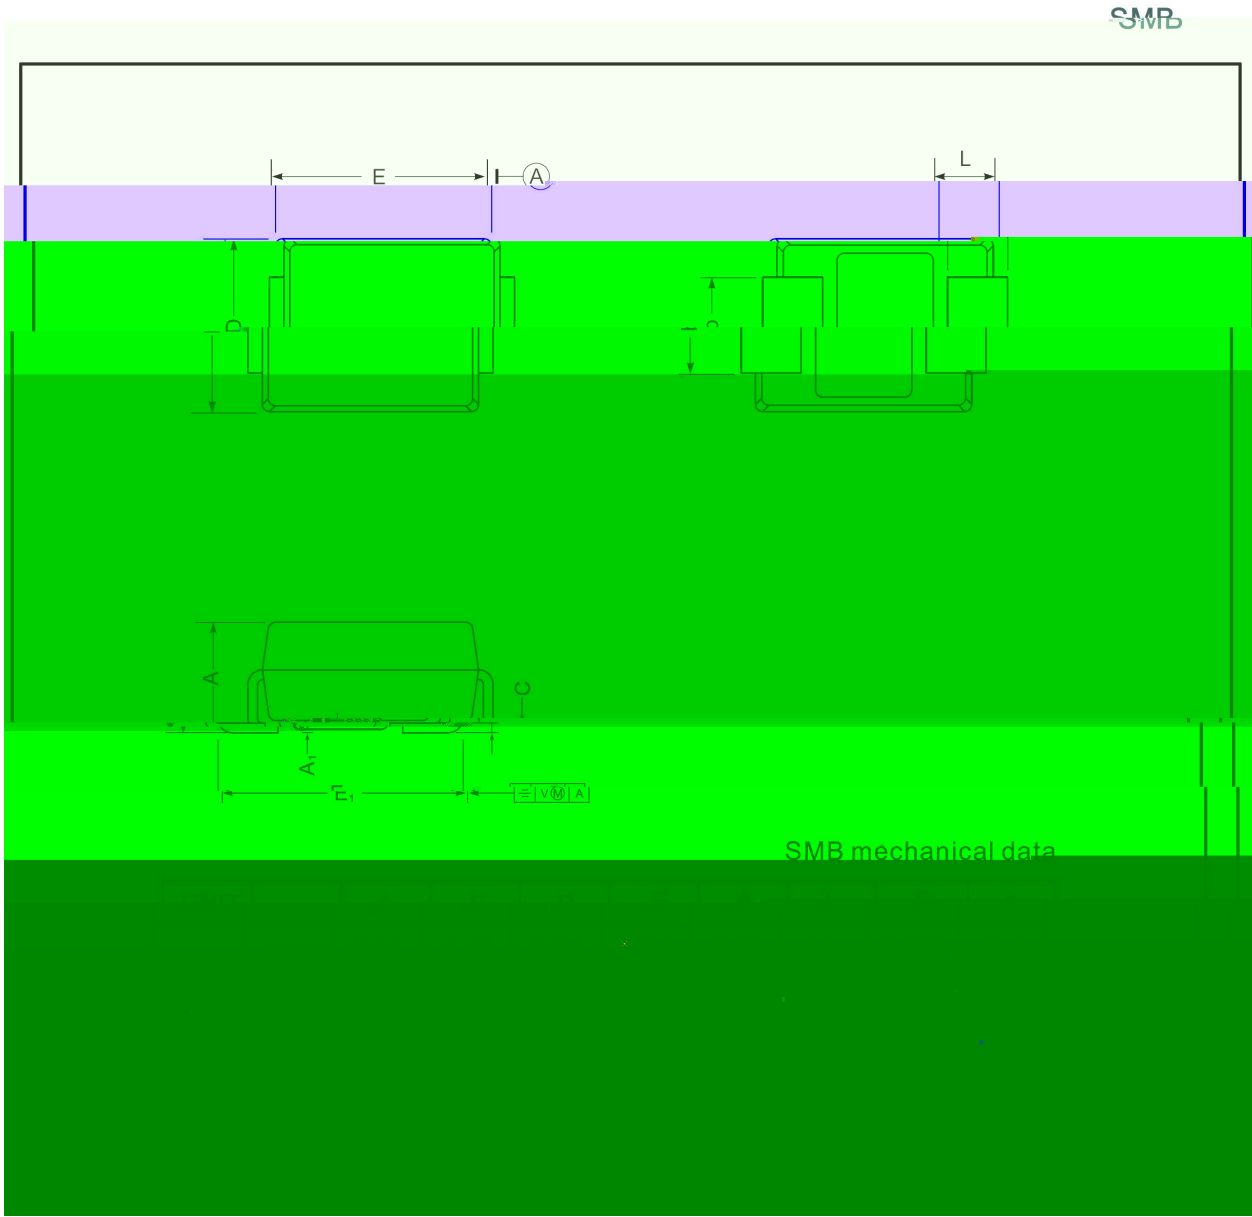

Marking Instructions



992 y ° Z W A
**** y ŷ D Z W A k š ŷ D Z J

Note:
992 y Product Type Code
**** y Lot No. Code, code change with Lot No Code

