

TB1S-15~TB10S-15

Rev.D May.-2017



DATA SHEET

1.5A

ABS/LBF

1.5A Surface Mount Glass Passivated Bridge Rectifier, ABS/LBF thin package.

Glass Passivated Chip Junction, Reverse Voltage :100 to 1000V,Forward Current: 1.5A,High Surge Current Capability, Designed for Surface Mount Application. Halogen free product.

General purpose.

4. 标记 / Marking

TB1S-15~TB10S-15

Rev.D May.-2017




蓝箭电子
BLUE ROCKET ELECTRONICS

DATA SHEET

Parameter	Symbol	Rating						Unit
		TB1S-15	TB2S-15	TB4S-15	TB6S-15	TB8S-15	TB10S-15	
Maximum Repetitive Peak Reverse Voltage	V_{RRM}							

Electrical Characteristic Curve

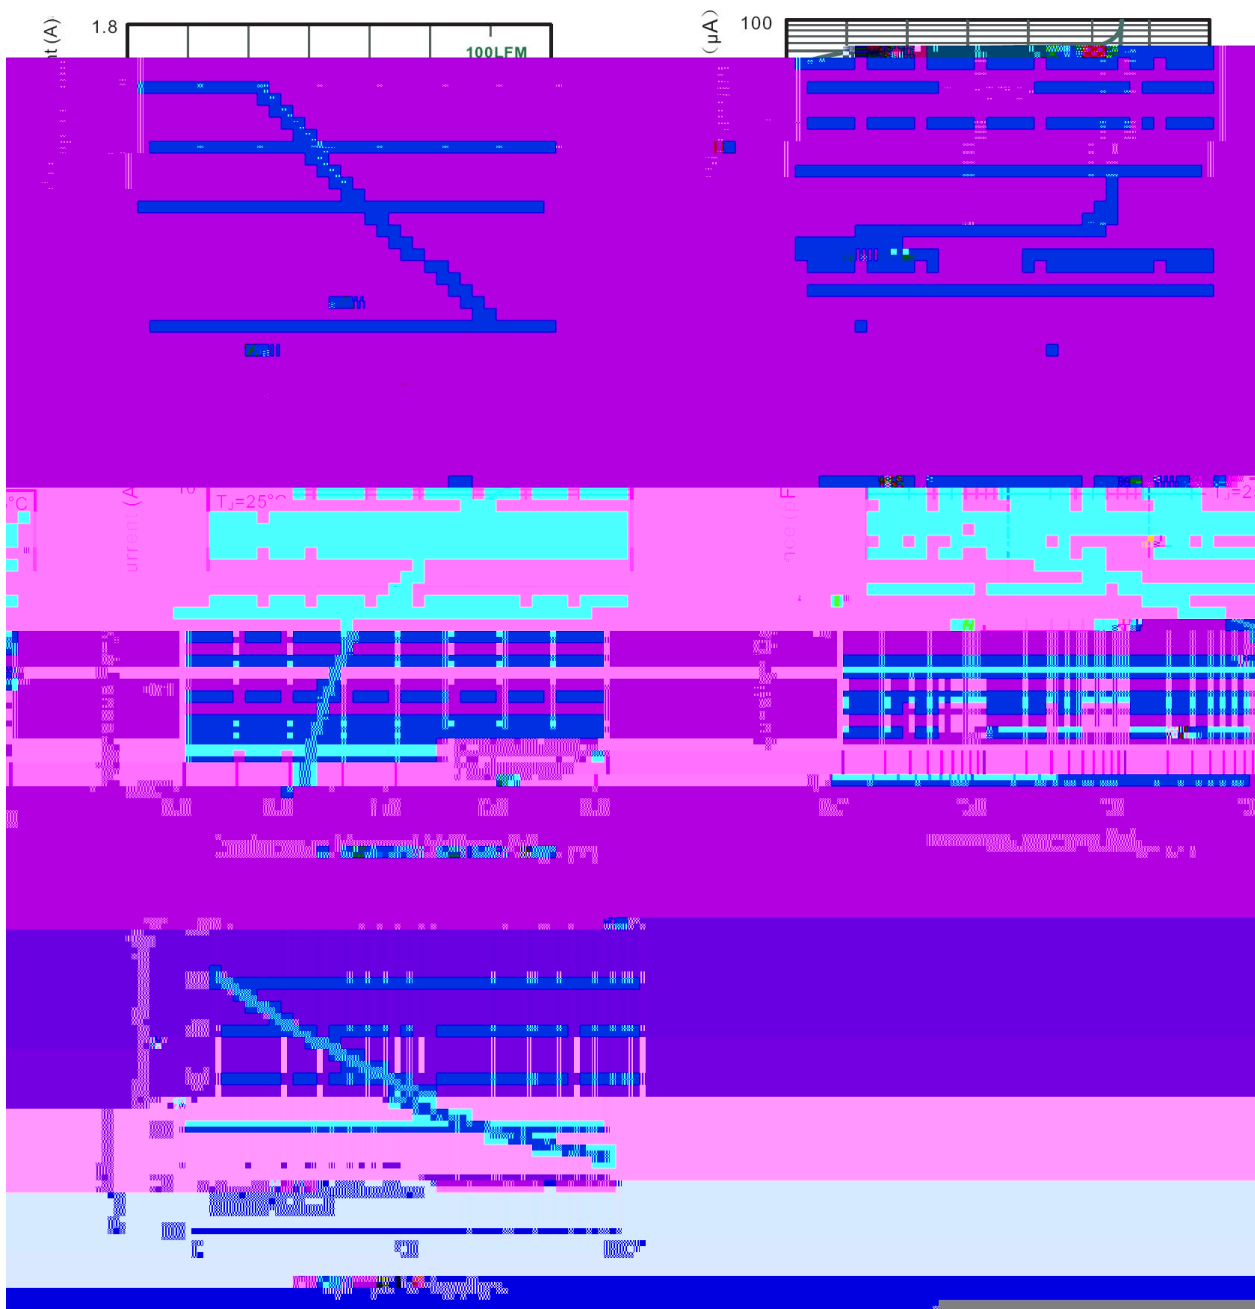

⌘ É Ò Ì f / Package Dimensions

ABS/LBF



4. 1.2 / Marking Instructions

Marking



Whp shudwxuh Suriloh i ru LU Uhior z Vroghulqj+Se0l uhh,

