

/ Revised record

F	2017-9				
G	2022-1-27	6	'		





/ Descriptions

TO-92

/ Features

1.240V
 $V_O = V_{ref}$ 20V
0.5 1
(55 μ A)
100uA 100mA
(0.05 Ω)
~

/ Applications



/ Equivalent Circuit




/ Pinning



/ Marking




TL432







DATASHEET






& Test circuits&Typical Application

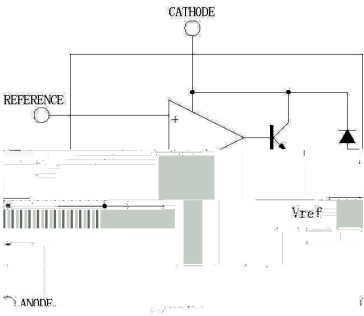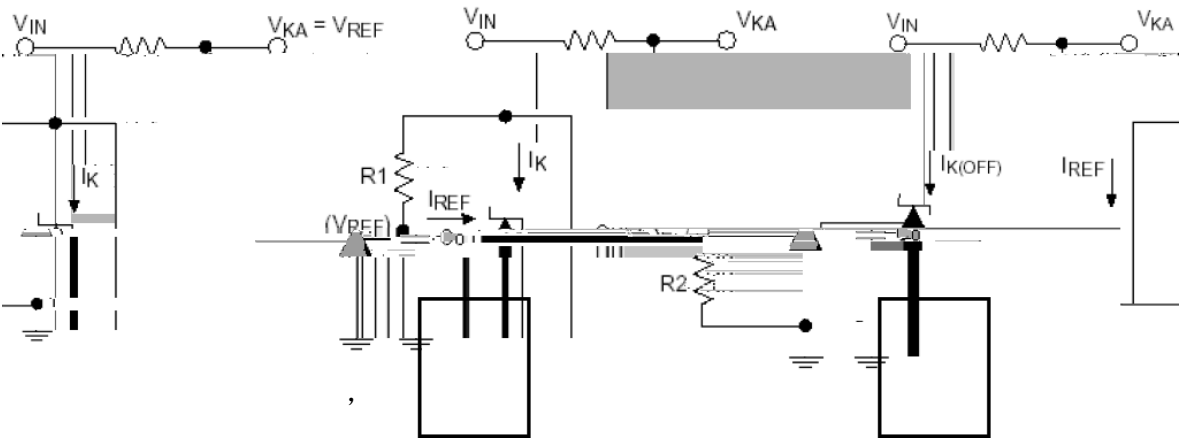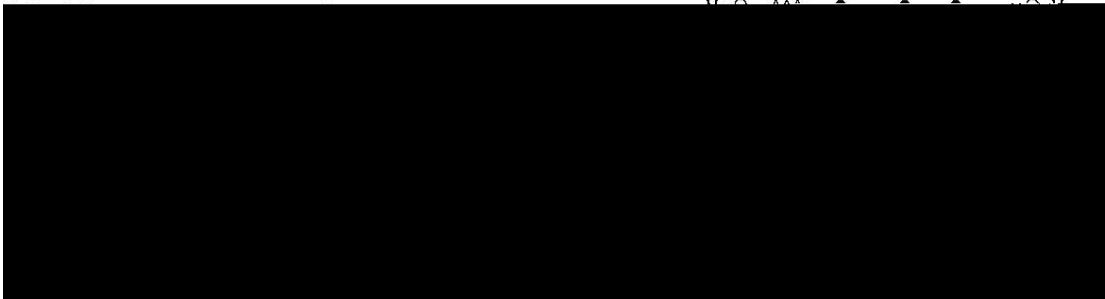




/ Electrical Characteristic Curve

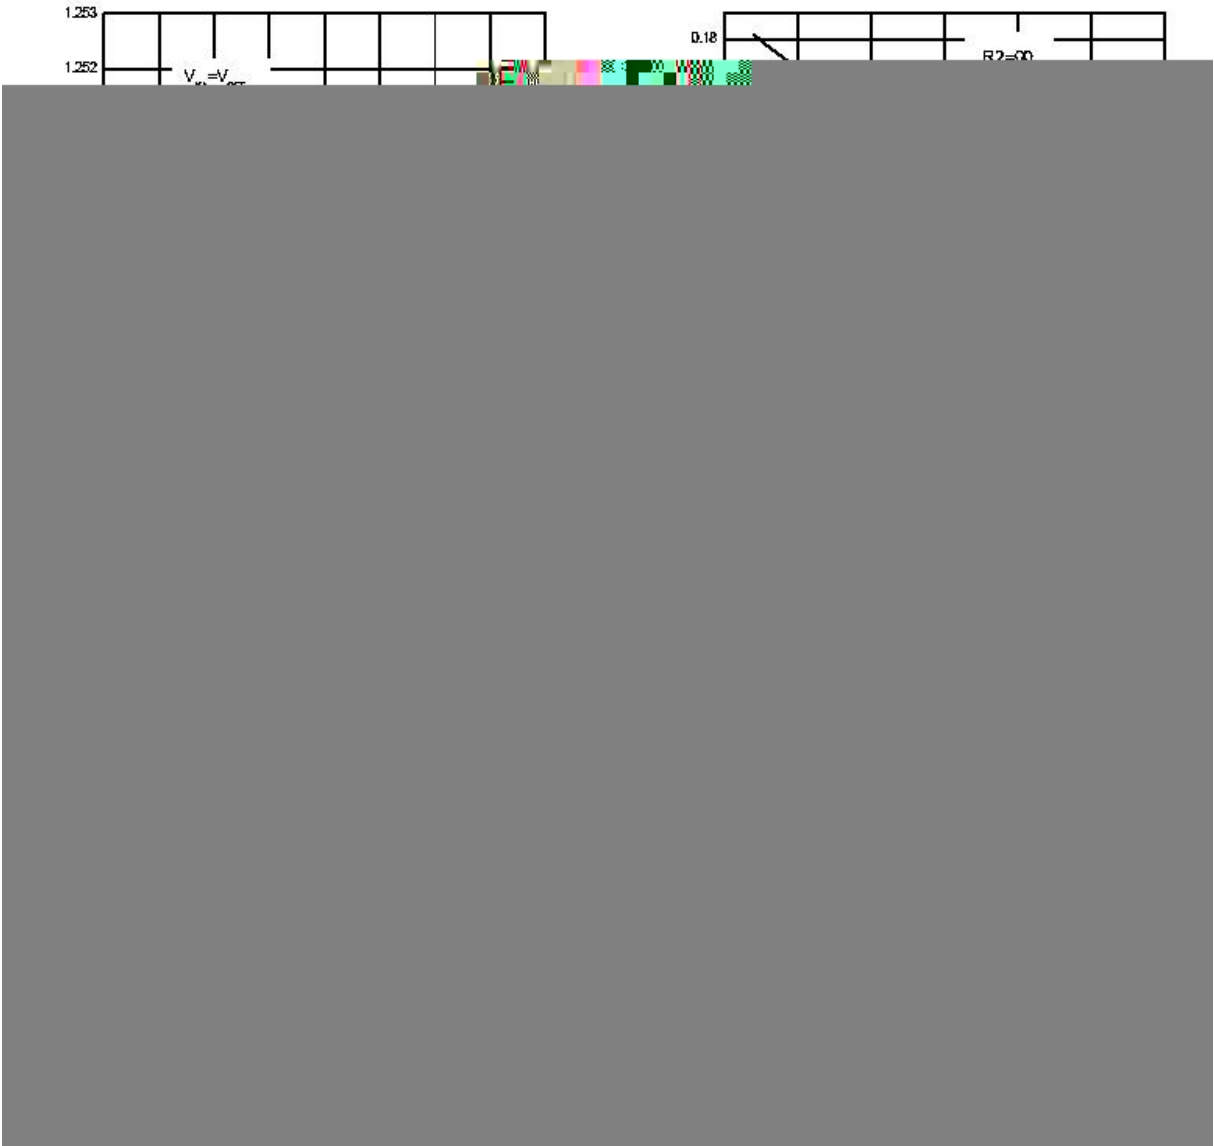

TL432





DATASHEET






/ Marking Instructions

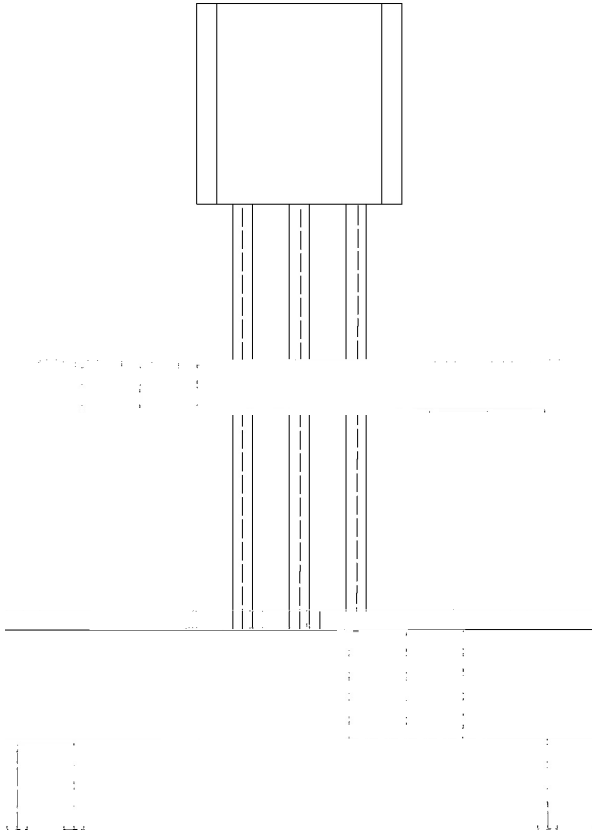

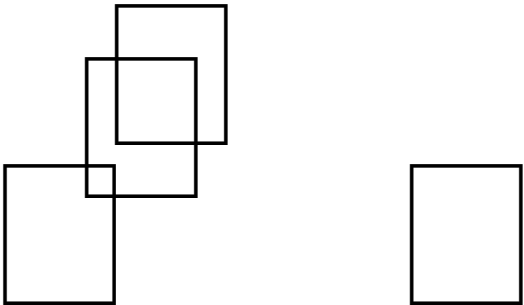



() / Temperature Profile for Dip Soldering(Pb-Free)

