

US3ABF~US3MBF

Rev.B May.-2019

DATA SHEET

/ Absolute Maximum Ratings(Ta=25)

Parameter	Symbol	Rating							Unit
		US3ABF	US3BBF	US3DBF	US3GBF	US3JBF	US3KBF	US3MBF	
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current at Tc = 125	$I_{F AV}$								

Note:

(1) P.C.B. mounted with 2.0" X 2.0" (5 X 5 cm) copper pad areass .

Parameter	Symbol	Test condition	Rating							Unit
			US3ABF	US3BBF	US3DBF	US3GBF	US3JBF	US3KBF	US3MBF	
Maximum Instantaneous Forward Voltage	V _F	I _F =3.0A	1.0			1.3	1.68			V
Maximum DC Reverse Current at Rated DC Blocking Voltage	I _R	T _a =25	5.0							uA
		T _a =125	100							
Maximum Reverse Recovery Time	T _{rr}	I _F =0.5A I _R =1.0A I _{rr} =0.25A	50				75			ns

US3ABF~US3MBF


Rev.B May.-2019



蓝箭电子
BLUE ROCKET ELECTRONICS

DATA SHEET

/ Package Dimensions

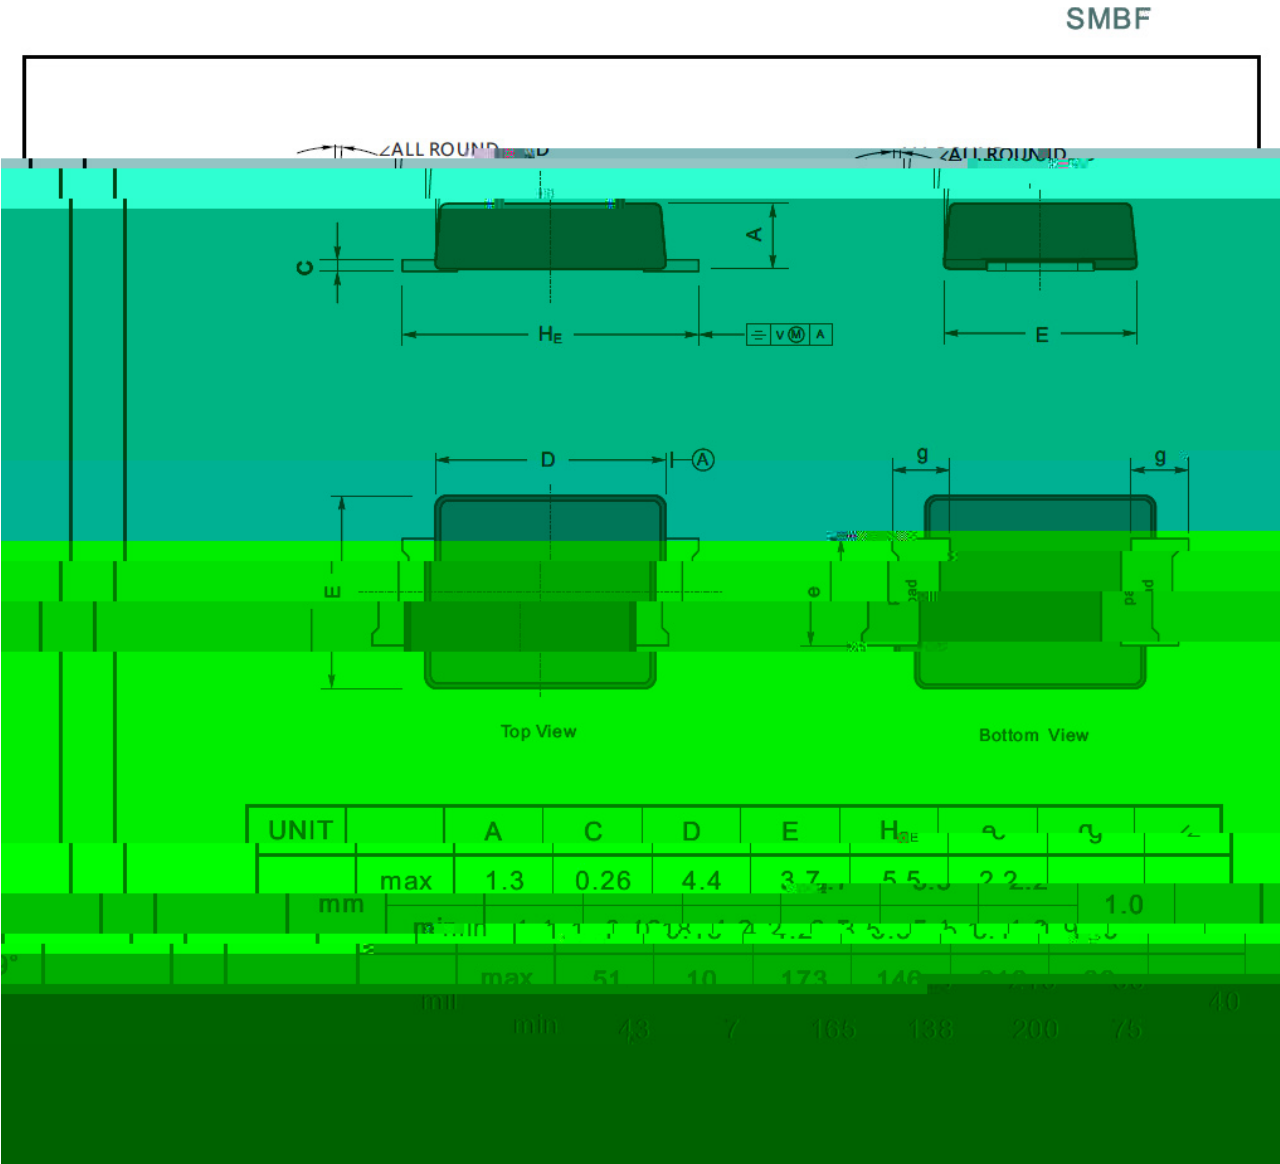

US3ABF~US3MBF

Rev.B May.-2019




蓝箭电子
BLUE ROCKET ELECTRONICS

DATA SHEET

/ Marking Instructions



/ Marking Instructions

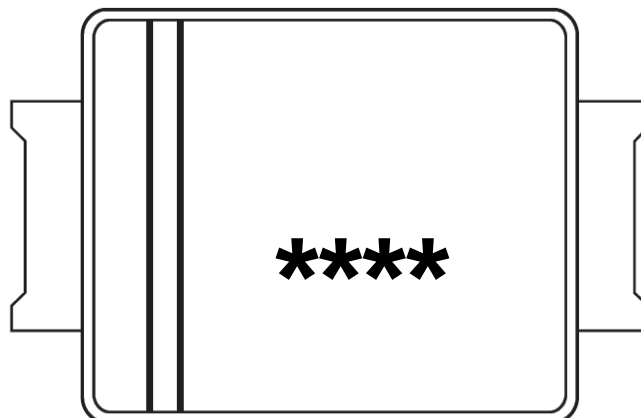

*

*

Note:

Product Type Code

Lot No. Code The 1st * means:YM Code The last 3 * means:little Lot No
Code

